

SAMSUNG

COLOR MONITOR


Chassis : KS6A(P)

Model : SM0-210TPV

SM0-150TPV

SERVICE *Manual*

COLOR MONITOR

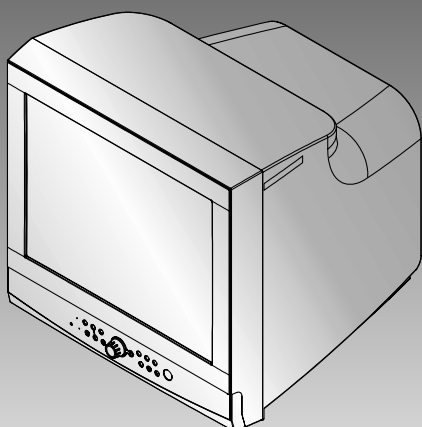

CONTENTS

1. Precautions
2. Specifications
3. Alignment and Adjustments
4. Troubleshooting
5. Exploded Views and Parts List
6. Electrical Parts List
7. Block Diagrams
8. PCB Diagram
9. Wiring Diagram
10. Schematic Diagrams

1. Precautions

Follow these safety, servicing and ESD precautions to prevent damage and protect against potential hazards such as electrical shock and X-rays.

1-1 Safety Precautions

1. Be sure that all of the built-in protective devices are replaced. Restore any missing protective shields.
2. When reinstalling the chassis and its assemblies, be sure to restore all protective devices, including: nonmetallic control knobs and compartment covers.
3. Make sure that there are no cabinet openings through which people—particularly children—might insert fingers and contact dangerous voltages. Such openings include the spacing between the picture tube and the cabinet mask, excessively wide cabinet ventilation slots, and improperly fitted back covers.

If the measured resistance is less than 1.0 megohm or greater than 5.2 megohms, an abnormality exists that must be corrected before the unit is returned to the customer.

4. Leakage Current Hot Check (Figure 1-1):
Warning: Do not use an isolation transformer during this test. Use a leakage-current tester or a metering system that complies with American National Standards Institute (ANIS C101.1, Leakage Current for Appliances), and Underwriters Laboratories (UL Publication UL1410, 59.7).
5. With the unit completely reassembled, plug the AC line cord directly into the power outlet. With the unit's AC switch first in the ON position and then OFF, measure the current between a known earth ground (metal water pipe, conduit, etc.) and all exposed metal parts, including: antennas, handle brackets, metal cabinets, screwheads and control shafts. The current measured should not exceed 0.5 milliamp. Reverse the power-plug prongs in the AC outlet and repeat the test.

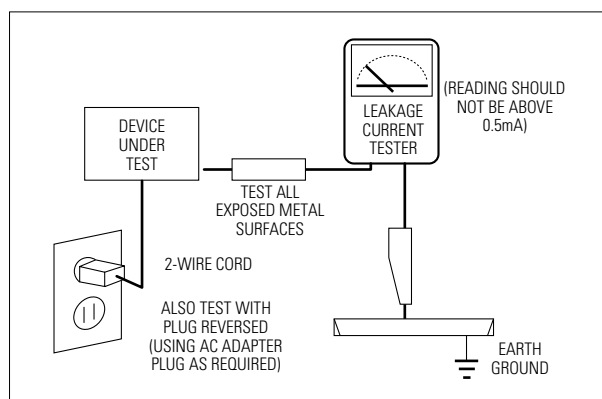


Fig. 1-1 AC Leakage Test

6. Jack Cold Check:
With the unit's AC plug disconnected from the AC source, connect an electrical jumper across the two AC prongs. Connect one lead of the ohmmeter to an AC prong. Connect the other lead to the coaxial connector.
7. X-ray Limits:
The picture tube is especially designed to prohibit X-ray emissions. To ensure continued X-ray protection, replace the picture tube only with one that is the same type as the original. Carefully reinstall the picture tube shields and mounting hardware; these also provide X-ray protection.
8. High Voltage Limits:
High voltage must be measured each time servicing is done on the B+, horizontal deflection or high voltage circuits. Correct operation of the X-ray protection circuits must be reconfirmed whenever they are serviced.
(X-ray protection circuits also may be called "horizontal disable" or "hold-down".)



Heed the high voltage limits. These include the X-ray Protection Specifications Label, and the Product Safety and X-ray Warning Note on the service data schematic.

1-1 Safety Precautions (Continued)

9. High voltage is maintained within specified limits by close-tolerance, safety-related components and adjustments. If the high voltage exceeds the specified limits, check each of the special components.
10. Design Alteration Warning:
Never alter or add to the mechanical or electrical design of this unit. Example: Do not add auxiliary audio or video connectors. Such alterations might create a safety hazard. Also, any design changes or additions will void the manufacturer's warranty.
11. Hot Chassis Warning:
Some Monitor chassis are electrically connected directly to one conductor of the AC power cord. If an isolation transformer is not used, these units may be safely serviced only if the AC power plug is inserted so that the chassis is connected to the ground side of the AC source.

To confirm that the AC power plug is inserted correctly, do the following: Using an AC voltmeter, measure the voltage between the chassis and a known earth ground. If the reading is greater than 1.0V, remove the AC power plug, reverse its polarity and reinsert. Re-measure the voltage between the chassis and ground.
12. Some Monitor chassis are designed to operate with 85 volts AC between chassis and ground, regardless of the AC plug polarity. These units can be safely serviced only if an isolation transformer inserted between the receiver and the power source.
13. Some Monitor chassis have a secondary ground system in addition to the main chassis ground. This secondary ground system is not isolated from the AC power line. The two ground systems are electrically separated by insulating material that must not be defeated or altered.
14. Components, parts and wiring that appear to have overheated or that are otherwise damaged should be replaced with parts that meet the original specifications. Always determine the cause of damage or overheating, and correct any potential hazards.

15. Observe the original lead dress, especially near the following areas: sharp edges, and especially the AC and high voltage power supplies. Always inspect for pinched, out-of-place, or frayed wiring. Do not change the spacing between components and the printed circuit board. Check the AC power cord for damage. Make sure that leads and components do not touch thermally hot parts.
16. Picture Tube Implosion Warning:
The picture tube in this Monitor employs "integral implosion" protection. To ensure continued implosion protection, make sure that the replacement picture tube is the same as the original.
17. Do not remove, install or handle the picture tube without first putting on shatterproof goggles equipped with side shields. Never handle the picture tube by its neck. Some "in-line" picture tubes are equipped with a permanently attached deflection yoke; do not try to remove such "permanently attached" yokes from the picture tube.
18. Product Safety Notice:
Some electrical and mechanical parts have special safety-related characteristics which might not be obvious from visual inspection. These safety features and the protection they give might be lost if the replacement component differs from the original—even if the replacement is rated for higher voltage, wattage, etc.

Components that are critical for safety are indicated in the circuit diagram by shading, () or ().

Use replacement components that have the same ratings, especially for flame resistance and dielectric strength specifications. A replacement part that does not have the same safety characteristics as the original might create shock, fire or other hazards.

1-2 Servicing Precautions

Warning1: First read the "Safety Precautions" section of this manual. If some unforeseen circumstance creates a conflict between the servicing and safety precautions, always follow the safety precautions.

Warning2: An electrolytic capacitor installed with the wrong polarity might explode.

1. Servicing precautions are printed on the cabinet. Follow them.
2. Always unplug the unit's AC power cord from the AC power source before attempting to: (a) Remove or reinstall any component or assembly, (b) Disconnect an electrical plug or connector, (c) Connect a test component in parallel with an electrolytic capacitor.
3. Some components are raised above the printed circuit board for safety. An insulation tube or tape is sometimes used. The internal wiring is sometimes clamped to prevent contact with thermally hot components. Reinstall all such elements to their original position.
4. After servicing, always check that the screws, components and wiring have been correctly reinstalled. Make sure that the portion around the serviced part has not been damaged.
5. Check the insulation between the blades of the AC plug and accessible conductive parts (examples: metal panels, input terminals and earphone jacks).
6. Insulation Checking Procedure: Disconnect the power cord from the AC source and turn the power switch ON. Connect an insulation resistance meter (500V) to the blades of the AC plug.

The insulation resistance between each blade of the AC plug and accessible conductive parts (see above) should be greater than 1 megohm.
7. Never defeat any of the B+ voltage interlocks. Do not apply AC power to the unit (or any of its assemblies) unless all solid-state heat sinks are correctly installed.
8. Always connect a test instrument's ground lead to the instrument chassis ground before connecting the positive lead; always remove the instrument's ground lead last.

1-3 Precautions for Electrostatically Sensitive Devices (ESDs)

1. Some semiconductor ("solid state") devices are easily damaged by static electricity. Such components are called Electrostatically Sensitive Devices (ESDs); examples include integrated circuits and some field-effect transistors. The following techniques will reduce the occurrence of component damage caused by static electricity.
2. Immediately before handling any semiconductor components or assemblies, drain the electrostatic charge from your body by touching a known earth ground. Alternatively, wear a discharging wrist-strap device. (Be sure to remove it prior to applying power—this is an electric shock precaution.)
3. After removing an ESD-equipped assembly, place it on a conductive surface such as aluminum foil to prevent accumulation of electrostatic charge.
4. Do not use freon-propelled chemicals. These can generate electrical charges that damage ESDs.
5. Use only a grounded-tip soldering iron when soldering or unsoldering ESDs.
6. Use only an anti-static solder removal device. Many solder removal devices are not rated as "anti-static"; these can accumulate sufficient electrical charge to damage ESDs.
7. Do not remove a replacement ESD from its protective package until you are ready to install it. Most replacement ESDs are packaged with leads that are electrically shorted together by conductive foam, aluminum foil or other conductive materials.
8. Immediately before removing the protective material from the leads of a replacement ESD, touch the protective material to the chassis or circuit assembly into which the device will be installed.
9. Minimize body motions when handling unpackaged replacement ESDs. Motions such as brushing clothes together, or lifting a foot from a carpeted floor can generate enough static electricity to damage an ESD.

CAUTION

These servicing instructions are for use by qualified service personnel only. To reduce the risk of electric shock do not perform any servicing other than that contained in the operating instructions unless you are qualified to do so.

2. Specifications and IC Data

2-1 Specifications

| | |
|--------------------|---------------------------------------|
| MODEL | SMO-210TP/150TP |
| SYSTEM | PAL |
| PICTURE TUBE | 15inch A36QDT351X, +380mG, 2.5mH, 35Ω |
| | 21inch A51QDX992X, 0mG, 1.85mH, 2.81Ω |
| POWER REQUIREMENTS | AC110V ~ 220V, 50/60Hz |
| SPEAKER IMPDANCE | 80ohm, 3W |

2-2 IC Line Up

| Table 2-1 IC Line-Up | | | |
|----------------------|---------------|------------------------------------|---------|
| Loc. No | Specification | Description | Remark |
| IC201S | L_DIYP06_001 | TDA9380PS/N211, OTP, English/China | Philips |
| IC301 | LA7845 | VERTICAL OUTPUT | Sanyo |
| IC501 | TDA6107Q | RGB DRIVE AMP | Philips |
| IC601 | TDA7267 | SOUND-AMP | Philips |
| IC801S | STR-F6656 | POWER IC(STR) | SANKEN |
| IC902 | 24C04 | EEPROM | |
| PC801S | PS2561 | PHOTO COUPLER | NEC |
| IC602 | HCF4053 | IC-CMOS LOGIC | SGS |
| IC202/203 | PCF8574 | IC-I/O SUPORT CHIP | Philips |
| IC804 | KA7632 | IC-POSI, FIXED REG | |
| IC805 | SI-8050S | IC-SWITCH REG | |
| IC806 | FQPF85N06 | FET-SILICON | |

2-3 Semiconductor Basic Diagrams

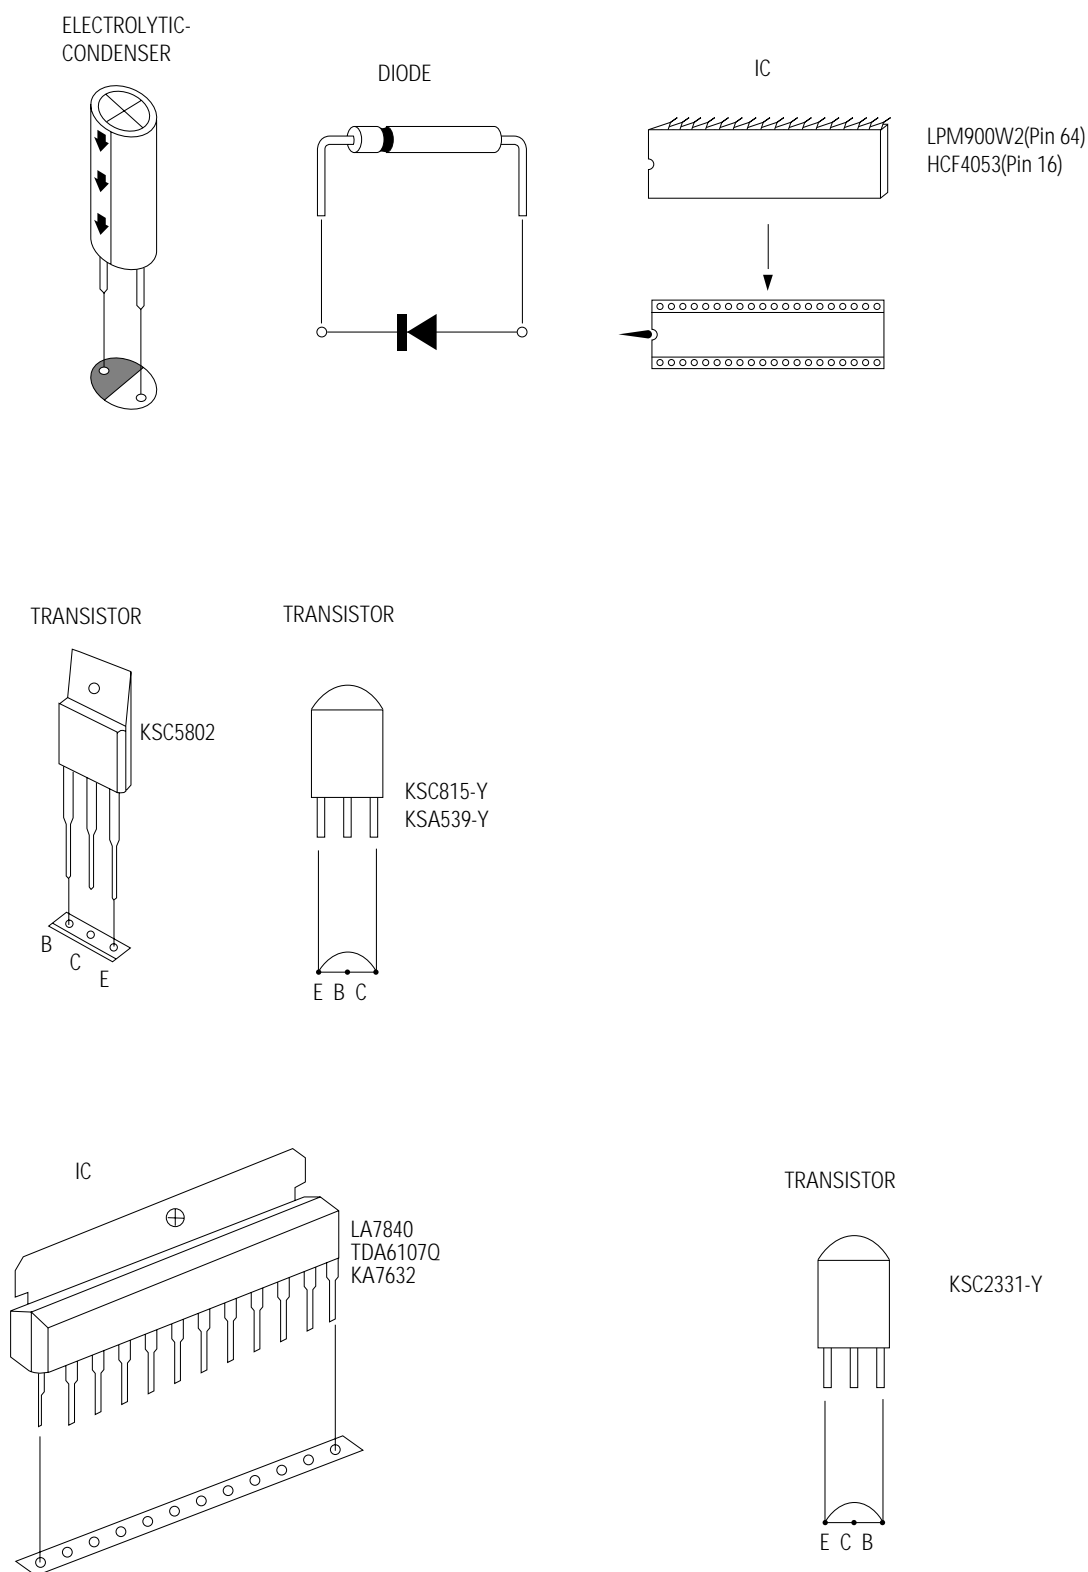


Fig. 2-1 Semiconductor Base Diagrams

3. Alignment and Adjustments

3-1 Preadjustment

3-1-1 Factory Mode

1. Do not attempt these adjustments in the Video Mode.
2. The Factory Mode adjustments are necessary when either the EEPROM (IC902) or the CRT is replaced.
3. Do not tamper with the "Adjustment" screen of the Factory Mode menu. This screen is intended only for factory use.

3-1-2 When EEPROM (IC902) Is Replaced

1. When IC902 is replaced all adjustment data revert to initial values. It is necessary to re-program this data.
2. After IC902 is replaced, warm up the MONITOR for 10 seconds.

3-1-3 When CRT Is Replaced

1. Make the following adjustments AFTER setting up after setting up purity and convergence :

White Balance
Sub-Brightness
Vertical Center
Vertical Size
Horizontal Size
Fail Safe (This adjustment must be the last step).
2. If the EEPROM or CRT is replaced and set SC as 24(factory mod

3-2 Factory / Service Mode

3-2-1 Procedure for the "Adjustment" Mode

1. This mode uses local key.
The Service Mode is activated by entering the following remote-control sequence :

Menu + 1 + 8 + 2 + SET
2. The "SERVICE (FACTORY)" message will be displayed. The Service Mode has four components: ADJUST, OPTION , G2-ADJUST and RESET.
3. Access the Adjustment Mode by pressing the "Volume-up"(video)keys. The adjustment parameters are listed in the accompanying table, and selected by pressing the left side two keys.
4. Selection sequences for the all system:
Two keys of the right side.

SCT>SBT>BLR>BLB>RG>GG>BG>VSL>VS>VA>HS>SC>CDL>STT>AKB>PDL>NDL>PSR>NSR>VOL>SCL>PWL>PEK>ACL>FCO>SCBT>SSP>MUS>PSNS
5. The VOLUME keys increase or decrease the adjustment values (stored in the non-volatile memory) when Adjustment Mode is cancelled.
6. Cancel the Adjustment Mode by re-pressing the "FACTORY" or "Power SAVE" keys.

3-3 Factory Mode

3-3-1 FACTROY MADE

To enter the Factory Mode, use one of following methods.

1. Press Remote control keys in the following sequence : "Menu" + "1" + "8" + "2" + "SET"
2. Press the Factory remote control keys in the following sequence : Menu → Factory

| | | | | |
|---|------|---------|------|---------|
| ADJUST OPTION G2-ADJUST RESET | | | | |
| | Item | Initial | Item | Initial |
| | SCT | 13 | PDL | 15 |
| | SBT | 9 | NDL | 10 |
| | BLR | 31 | PSR | 15 |
| | BLB | 27 | NSR | 10 |
| | RG | 32 | VOL | 30 |
| | GG | 31 | SCL | 1 |
| | BG | 31 | PWL | 12 |
| | VSL | 19 | PEK | 2 |
| | VS | 38 | ACL | 0 |
| | VA | 40 | FCO | 0 |
| | HS | 30 | SCBT | 45 |
| | SC | 24 | SSP | 20 |
| | CDL | 9 | MUS | 1 |
| | STT | 7 | PSNS | 1 |
| | AKB | 0 | | |

3-3-2 ADJUST ITEMS(UOC)

| OSD | Range | Register | Initial Value | Adjustment Value | Remrk |
|------|--------|------------|---------------|------------------|---|
| SCT | 0 ~ 23 | 10h | 13 | 9 | Sub contrast(high light adjustment) |
| SBT | 0 ~ 23 | 18h | 9 | 13 | Sub brightness(low light adjustment) |
| BLR | 0 ~ 63 | 14h(D5-D0) | 31 | 31 | Black level offset R(low light R adjustment) |
| BLB | 0 ~ 63 | 15h(D5-D0) | 27 | 27 | Black level offset B(low light B adjustment)) |
| RG | 0 ~ 63 | 16h(D5-D0) | 32 | 32 | White point R(high light R adjustment) |
| GG | 0 ~ 63 | 17h(D5-D0) | 25 | 31(Fix) | White point G(high light 25 fixed) |
| BG | 0 ~ 63 | 18h(D5-D0) | 31 | 31 | White point B(high light B adjustment) |
| VSL | 0 ~ 63 | 0Fh(D5-D0) | 19 | 19 | Vertical slope |
| VS | 0 ~ 63 | 12h(D5-D0) | 38 | 31(Fix) | Vertical shift |
| VA | 0 ~ 63 | 10h(D5-D0) | 40 | 22 | Vertical amplitude |
| HS | 0 ~ 63 | 09h(D5-D0) | 30 | 31 | Horizontal shift |
| SC | 0 ~ 63 | 0Fh(D5-D0) | 24 | 28(Fix) | S-correction |
| CDL | 0 ~ 15 | 2Ah(D3-D0) | 9 | 9(Fix) | Cathode drive level |
| STT | 0 ~ 7 | 08h | 7 | 7(Fix) | Sub tint(NTSC only) |
| AKB | 0 ~ 1 | 2Ah(D4) | 0 | 0(Fix) | Black current stabilization |
| PDL | 0 ~ 15 | 1Ah(D3-D0) | 15 | 15(Fix) | PAL Y-delay adjustment |
| NDL | 0 ~ 15 | 1Ah(D3-D0) | 10 | 10(Fix) | NTSC Y-delay adjustment |
| PSR | 0 ~ 23 | 1Ch | 15 | 5(Fix) | PAL sub color gain adjustment |
| NSR | 0 ~ 23 | 1Ch | 10 | 10(Fix) | NTSC sub color gain adjustment |
| VOL | 0 ~ 63 | 1Fh | 10 | 10(Fix) | Initial vol adjustment |
| SCL | 0 ~ 3 | 04h(D5-D4) | 1 | 1(Fix) | Soft clipping levle |
| PWL | 0 ~ 15 | 04h(D3-D0) | 12 | 12(Fix) | Peak white limiting |
| PEK | 0 ~ 3 | 19h(D7-D6) | 2 | 2(Fix) | Peaking center frequency |
| ACL | 0 ~ 1 | 20h(D1) | 0 | 0(Fix) | Automatic color limiting |
| FCO | 0 ~ 1 | 21h(D0) | 0 | 0(Fix) | Forced color limiting |
| SCBT | 0 ~ 63 | 1Bh | 45 | 45(Fix) | Screen brightness(different from INCH) |
| SSP | 0 ~ 23 | 19h(D5-D0) | 20 | 1 0(Fix) | Sub Sharpness gain adjustment |
| MUS | 0 ~ 1 | 20h(D2) | 1 | 1(Fix) | NTSC Matrix : for japan Model → 0 |
| PSNS | 0 ~ 1 | 21h(D2) | 1 | 1(Fix) | Ident sensitivity PAL/NTSC decoder |

3-3-3 WHITE BALANCE

| SECTION | X | Y | $\triangle y(F/L)$ |
|------------|-----|-----|--------------------|
| HIGH LIGHT | 283 | 297 | 30 |
| LOW LIGHT | 283 | 297 | 1 |

3-3-4 OPTION

ADJUST
OPTION
G2-ADJUST
RESET

→

| ITEM | SMC-212H(CHINA) | REMARK |
|--------------|-----------------|-------------------------|
| 1. SYSTEM | : NT/PAL | |
| 2. AV IN CH. | : Y/C | Y/C : SNI-210TP/150TP |
| | | CVBS : HAWKEYE |
| 3. LANGUAGE | : EUR | ENG/FRN/GER/ITALY/SPAIN |

3-3-5 G2-ADJUST

| | | |
|---|---|--|
| ADJUST OPTION G2-ADJUST RESET | → | When the G2-ADJUST mode is entered, SCREEN ADJUST will be shown as 'NG'. Adjust the Screen jack of FBT so that the value of SCREEN ADJUST can be shown as 'OK'. In this case, AV1 must be in NO Signal. |
|---|---|--|

3-3-6 RESET

The Reset Mode is used during User Menu Control Value inspection Function reset :

| NO | ITEM | Initial Value |
|----|------------|---------------|
| 1 | Contrast | 50 |
| 2 | Brightness | 50 |
| 3 | Color | 50 |

3-4 Other Adjustment

3-4-1 GENERAL

1. Usually, a color Monitor needs only slight touch-up adjustment upon installation. Check the basic characteristics such as height, horizontal and vertical sync and focus.
2. The picture should have good black and white details. There should be no objectionable color shading; if color shading is present, perform the purity and convergence adjustments described below.
3. Use the specified test equipment or its equivalent.
4. Correct impedance matching is essential.
5. Avoid overload. Excessive signal from a sweep generator might overload the front-end of the Monitor. When inserting signal markers, do not allow the marker generator to distort test results.
6. Connect the Monitor only to an AC power source with voltage and frequency as specified on the backcover nameplate.
7. Do not attempt to connect or disconnect any wires while the Monitor is turned on. Make sure that the power cord is disconnected before replacing any parts.
8. To protect against shock hazard, use an isolation transformer.

3-4-2 AUTOMATIC DEGAUSSING

A degaussing coil is mounted around the picture tube, so that external degaussing after moving the Monitor should be unnecessary. But the receiver must be properly degaussed upon installation.

The degaussing coil operates for about 1 second after the power is switched ON. If the set has been moved or turned in a different direction, disconnect its AC power for at least 30 minutes.

If the chassis or parts of the cabinet become magnetized, poor color purity will result. If this happens, use an external degaussing coil. Slowly move the degaussing coil around the faceplate of the picture tube and the sides and front of the receiver. Slowly withdraw the coil to a distance of about 6 feet before removing power.

3-4-3 HIGH VOLTAGE CHECK

CAUTION: There is no high voltage adjustment on this chassis. The B+ power supply must be set to +125 volts (Full color bar input and normal picture level).

1. Connect a digital voltmeter to the second anode of the picture tube.
2. Turn on the Color Monitor. Set the Brightness and Contrast controls to minimum (zero beam current).
3. The high voltage should not exceed 31KV.
4. Adjust the Brightness and contrast controls to both extremes. Ensure that the high voltage does not exceed 31KV under any conditions.

3-4-4 FOCUS ADJUSTMENT

1. Input a black and white signal.
2. Adjust the tuning control for the clearest picture.
3. Adjust the FOCUS control for well defined scanning lines in the center area of the screen.

3-4-5 CATHODE VOLTAGE ADJUSTMENT (SCREEN ADJUSTMENT)

1. Enter to G2-Adjust mode in Factory mode.
2. Disconnect all input signal.
3. Adjust the Screen VR (on the FBT) so that the OSD on the monitor bewnes "SCREEN : OK".

3-4-6 PURITY ADJUSTMENT

1. Warm up the receiver for at least 20 minutes.
2. Plug in the CRT deflection yoke and tighten the clamp screw.
3. Plug the convergence yoke into the CRT and set in as shown in Fig. 4-1
4. Input a black and white signal.
5. Fully demagnetize the receiver by applying an external degaussing coil.
6. Turn the CONTRAST and BRIGHTNESS controls to maximum.
7. Loosen the clamp screw holding the yoke. Slide the yoke backward or forward to provide vertical green belt. (Fig. 4-2).
8. Tighten the convergence yoke.
9. Slowly move the deflection yoke forward, and adjust for the best overall green screen.
10. Temporarily tighten the deflection yoke.
11. Produce blue and red rasters by adjusting the low-light controls. Check for good purity in each field.
12. Tighten the deflection yoke.

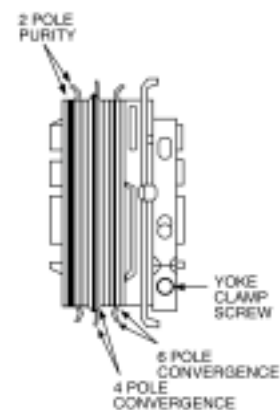
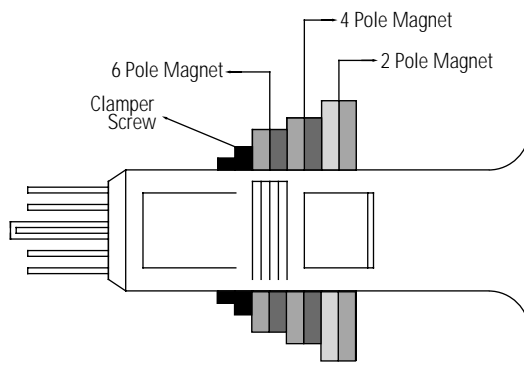


Fig. 4-1 Convergence Magnet Assembly

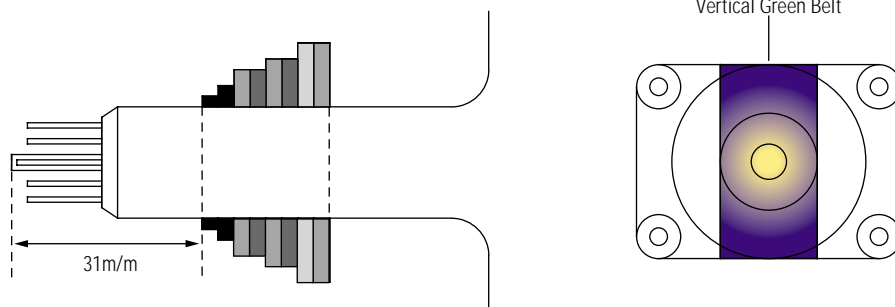


Fig. 4-2 Center Convergence Adjustment

3-4-7 WHITE BALANCE ADJUSTMENT

(a) Set up

1. Warm up the Monitor for at least 30 minutes in the Aging Mode (OSD White). This mode is displayed by entering the following sequence:

Menu(Volume down)→"1"→"8"→"2"→"SET"

2. Input a Toshiba pattern.

(b) Low-Light Adjustment

1. Set SBT to 1.0 fL in the Factory Service Mode with using CA100. See Fig. 4-3.
2. Adjust RG,BG so that the levels are suitable to each local area.

(c) High-Light Adjustment

1. Set SCT to 30 FL in the Factory Service Mode with using CA100. See Fig. 4-3.

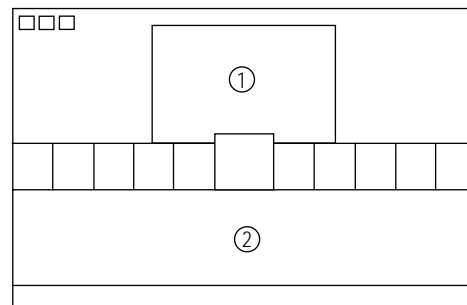


Fig. 4-3

3-4-8 CENTER CONVERGENCE ADJUSTMENT

1. Warm up the receiver for at least 20 minutes.
2. Adjust the two tabs of the 4 pole magnets to change the angle between them. Superimpose the red and blue vertical lines in the center area of the screen.
3. Adjust the Brightness and Contrast controls for a well defined picture.
4. Adjust the two-tab pairs of the 4 pole magnets, and change the angle between them. Superimpose the red and the blue vertical lines in the center area of the screen.
5. Turn the both tabs at the same time, keeping the angle constant, and superimpose the red and blue horizontal line in the center of the screen.
6. Adjust the two-tab pairs of the 6-pole magnets to superimpose the red and blue line onto the green. (Changing the angle affects the vertical lines, and rotating both magnets affects the horizontal lines.)
7. Repeat adjustments 2~6, if necessary.
8. Since the 4-pole magnets and 6-pole magnets interact, the dot movement is complex (Fig. 4-4).



Fig. 4-4 Center Convergence Adjustment

3-4-9 Sub-Color Adjustment

Set $\frac{\text{PSR}}{\text{NSR}}$ data to $\frac{5}{10}$ (Factory Mode).

3-4-10 Geometry Adjustment

SC → VS → VA → VSL → HS

1. Input a lion head pattern.
2. Set the SC (S-Correction) as 28 and VS (Vertical Shift) 31 so that the lion head circle becomes oval.
3. Adjust with VA (Vertical Amplitude) so that the top margin of the picture is 4.




Fig. 4-6

4. Adjust with VSL (Vertical-Slope) so that the bottom margin of the picture is 4.




Fig. 4-7

5. Adjust with HS (Horizontal Shift) so that the lion-head pattern and CRT centers are aligned.





Fig. 4-8

6. Adjust HS (Horizontal Shift) so that the left and right margins of the picture are 5.


MEMO

4. Troubleshooting


4-1 No Power

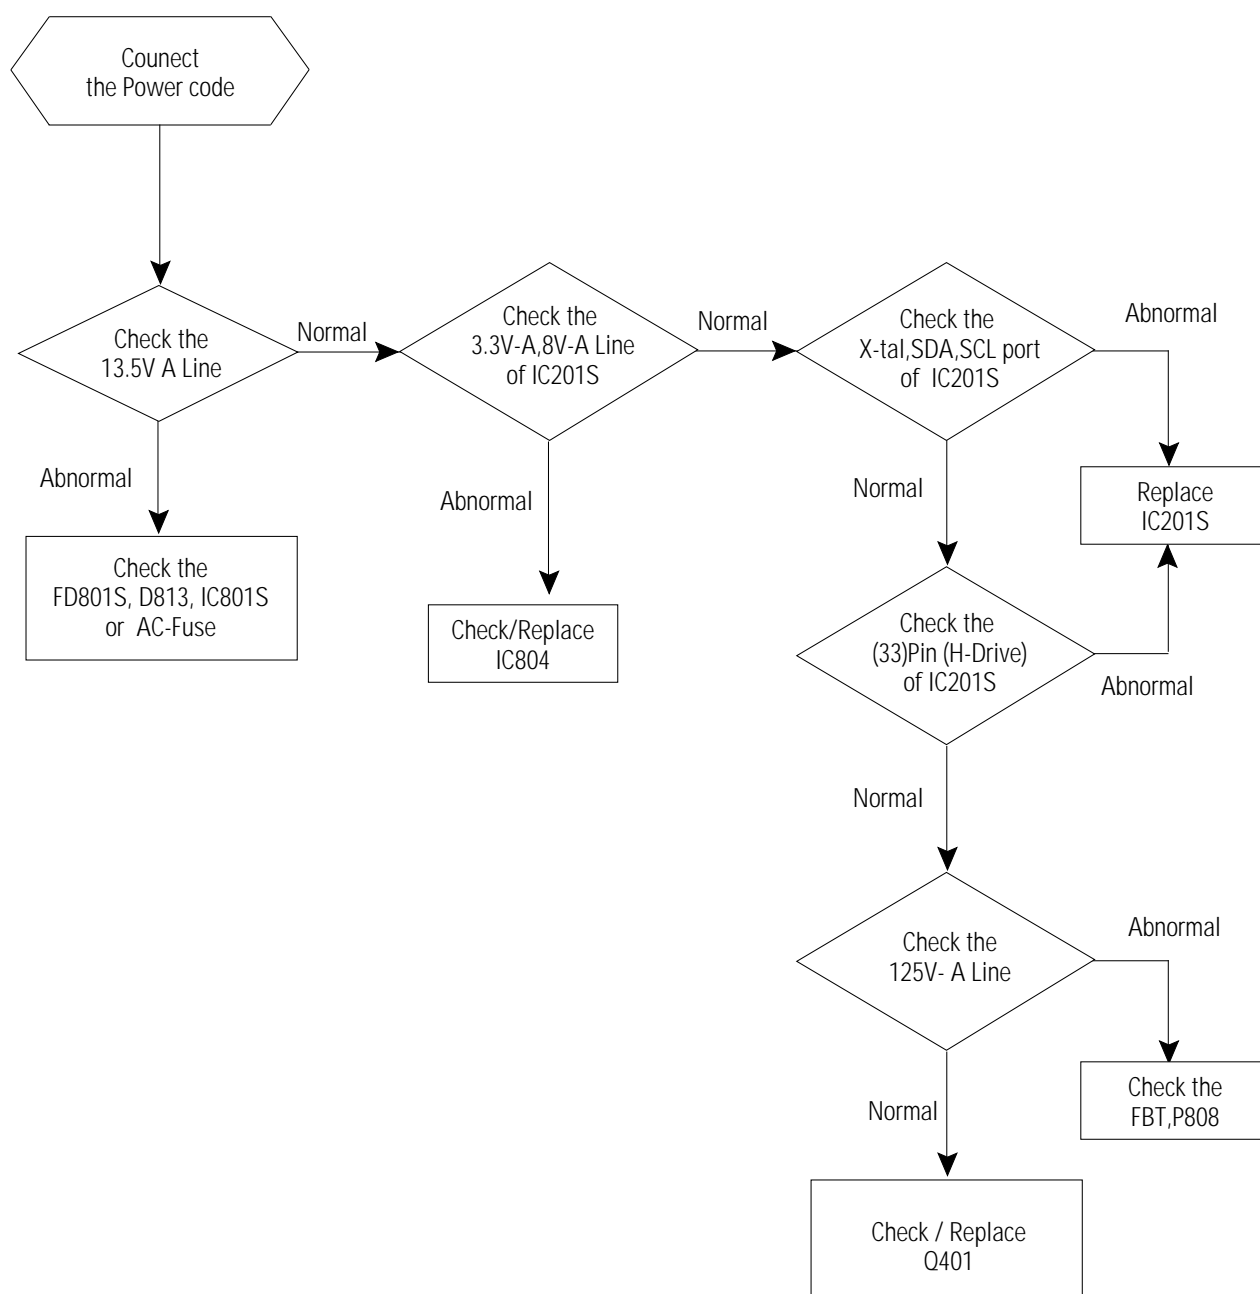


4-2 No Video(Sound OK)

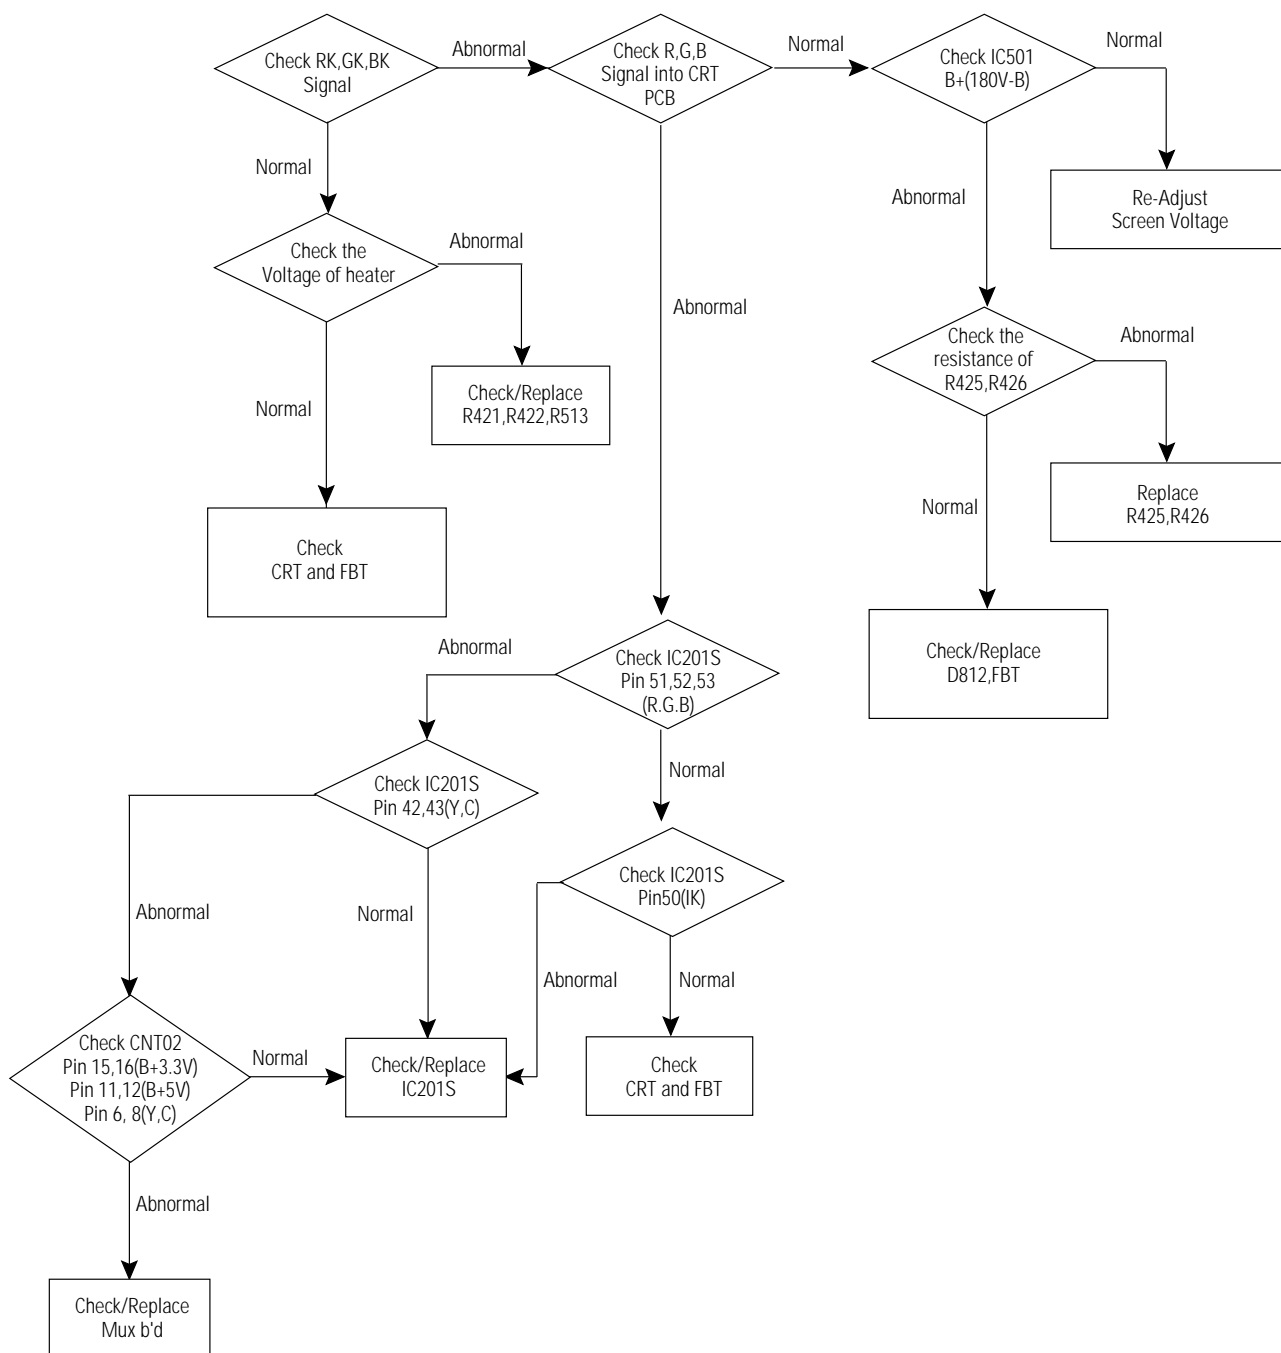

4-3 No Sound(Video OK)

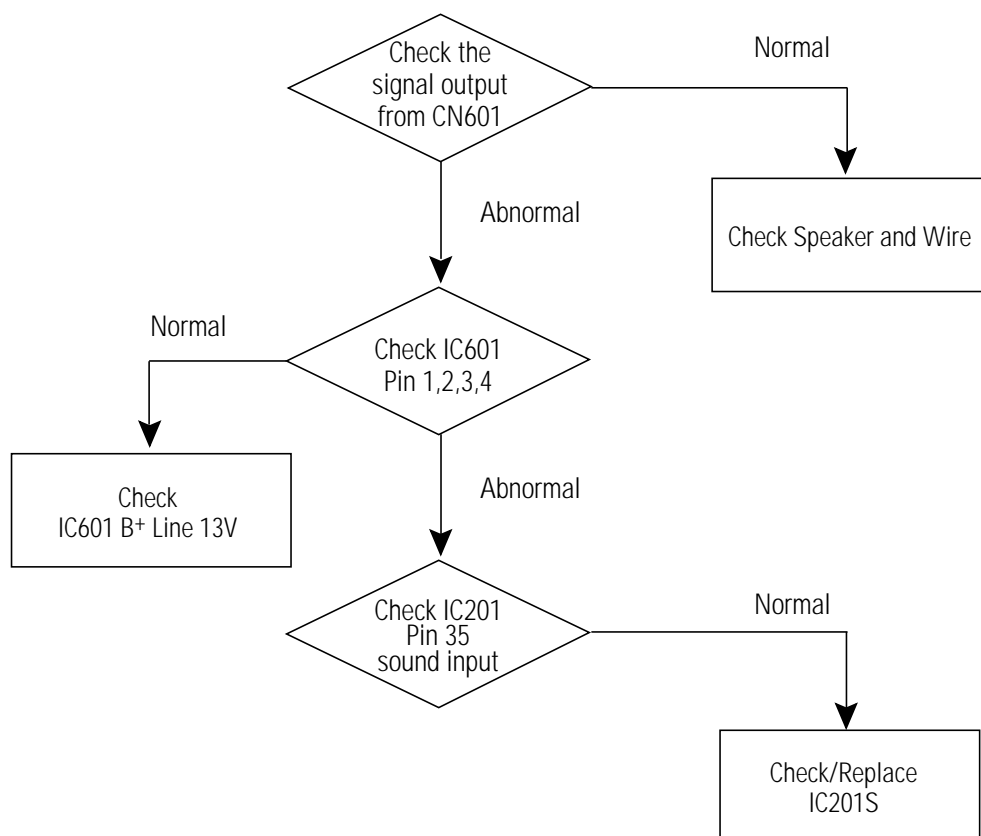


4-4 Horizontal Lines Appear on Screen

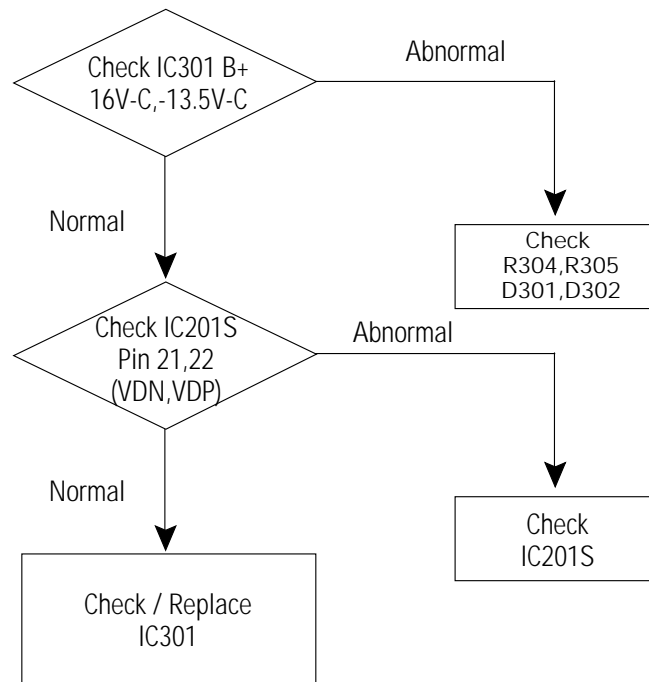


5. Exploded View & Parts List

5-1 SMO-150TPV

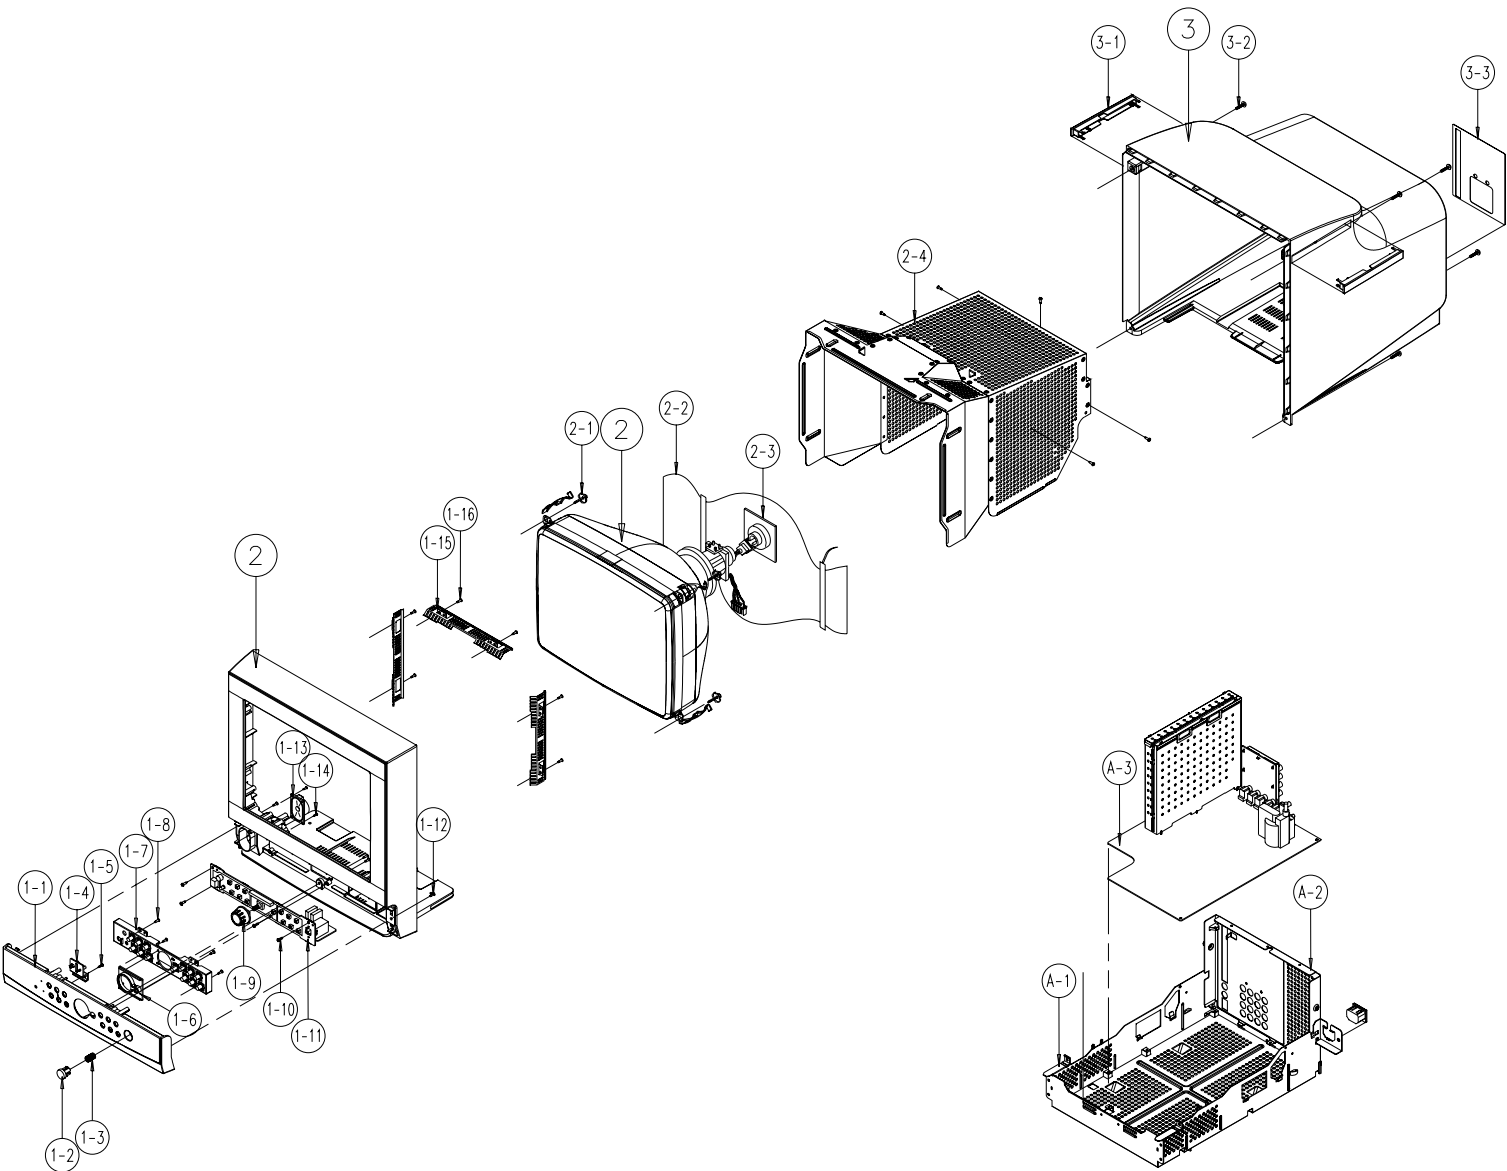

| No | Code No | Description | Specification | Q'ty | Remark | S.N.A |
|------|-------------|--|---------------|------|--------|-------|
| 1 | AA96-01388A | ASSY COVER P-PANEL FRONT;150TP,TT,,ABS,H | | 1 | | S.N.A |
| 1* | AA64-03281A | CABINET-FRONT;150TP,ABS HB,IV16 | | 1 | | |
| 1-1 | AA64-03284A | PANEL-CONTROL;150TP,ABS HB,IV16 | | 1 | | |
| 1-2 | AA64-03286A | KNOB-POWER;210TP,ABS,HB,IV16 | | 1 | | |
| 1-3 | AA61-60003J | SPRING ETC-CS;- ,SUS304,-,-,OD6,N7,OD6,-, | | 1 | KNOPOW | S.N.A |
| 1-4 | AA64-03289A | WINDOW-RMC,LED;210PT,PC CLR | | 1 | | |
| 1-5 | 6003-001019 | SCREW-TAPTITE;RH,+ ,B,M4,L12,ZPC(BLK),SWR | | 1 | W/RL+P | S.N.A |
| 1-6 | AA64-03288A | DECORATION-ROTARY;210TP,ABS,HB,IV16,SVM3 | | 1 | | |
| 1-7 | AA64-03285A | KNOB-CONTROL;210TP,ABS,HB,IV16 | | 1 | | |
| 1-8 | 6003-001019 | SCREW-TAPTITE;RH,+ ,B,M4,L12,ZPC(BLK),SWR | | 4 | K/C+P/ | S.N.A |
| 1-9 | AA64-03287A | KNOB-ROTARY;210TP,ABS,HB,IV16 | | 1 | P/CTRL | S.N.A |
| 1-10 | 6003-001019 | SCREW-TAPTITE;RH,+ ,B,M4,L12,ZPC(BLK),SWR | | 4 | P/CTRL | S.N.A |
| 1-11 | AA94-12558A | ASSY PCB MISC-CONTROL;SMO-210TPV,KS6A | | 1 | | |
| 1-12 | 6003-001019 | SCREW-TAPTITE;RH,+ ,B,M4,L12,ZPC(BLK),SWR | | 5 | P/F+C/ | S.N.A |
| 1-13 | AA96-01393A | ASSY SPEAKER P;8ohm,BT17MO,-,2W,350mm,- | | 1 | | S.N.A |
| 1-14 | 6003-001023 | SCREW-TAPTITE;RWH,+ ,B,M3,L10,ZPC(YEL),SW | | 2 | SPK+C/ | S.N.A |
| 1-15 | AA63-00653A | EARTH-PLATE;150TP,PBS-1,T0.3 | | 3 | C/F | |
| 1-16 | 6003-001019 | SCREW-TAPTITE;RH,+ ,B,M4,L12,ZPC(BLK),SWR | | 6 | EARTH+ | S.N.A |
| 2 | AA91-06043A | ASSY CPT;SMO-150TPV | | 1 | | S.N.A |
| 2-1 | AA60-10050R | SCREW-ASSY;- ,SWRCH18A,M5,L31.5,HH,+ ,WC,- | | 4 | CRT+C/ | S.N.A |
| 2-2 | AA27-00077A | COIL DEGAUSSING;- ,4.3mH,20%,70T,90HM,- | | 1 | | |
| 2-3 | 3704-001105 | SOCKET-CRT;11P,20PI,26.5PI,NI,- | | 1 | V999S | |
| 2-4 | AA96-01389A | ASSY MISC P-SHIELD TOP;150TP,TT,,,AL1050 | | 1 | | S.N.A |
| 3 | AA64-03282A | CABINET-BACK;150TP,ABS HB,IV16 | | 1 | | |
| 3-1 | AA63-00650A | COVER-SCREW;150TP,ABS HB,IV16 | | 2 | | |
| 3-2 | 6003-000009 | SCREW-TAPTITE;BH,+ ,B,M4,L16,ZPC(YEL),SWR | | 4 | C/B+C/ | S.N.A |
| 3-3 | AA64-03290A | INLAY-BACK;210TP,PS SHEET,T0.5 | | 1 | | |
| A-1 | AA61-01283A | BRACKET-CHASSIS;150TP,SECC,T1.0 | | 1 | | |
| A-2 | AA61-01268A | BRACKET-TERMINAL;210TP,SECC,T1.0 | | 1 | | |
| A-3 | AA94-12556A | ASSY PCB MAIN;SMO-150TPV,KS6A | | 1 | | S.N.A |

5-2 SM0-210TPV

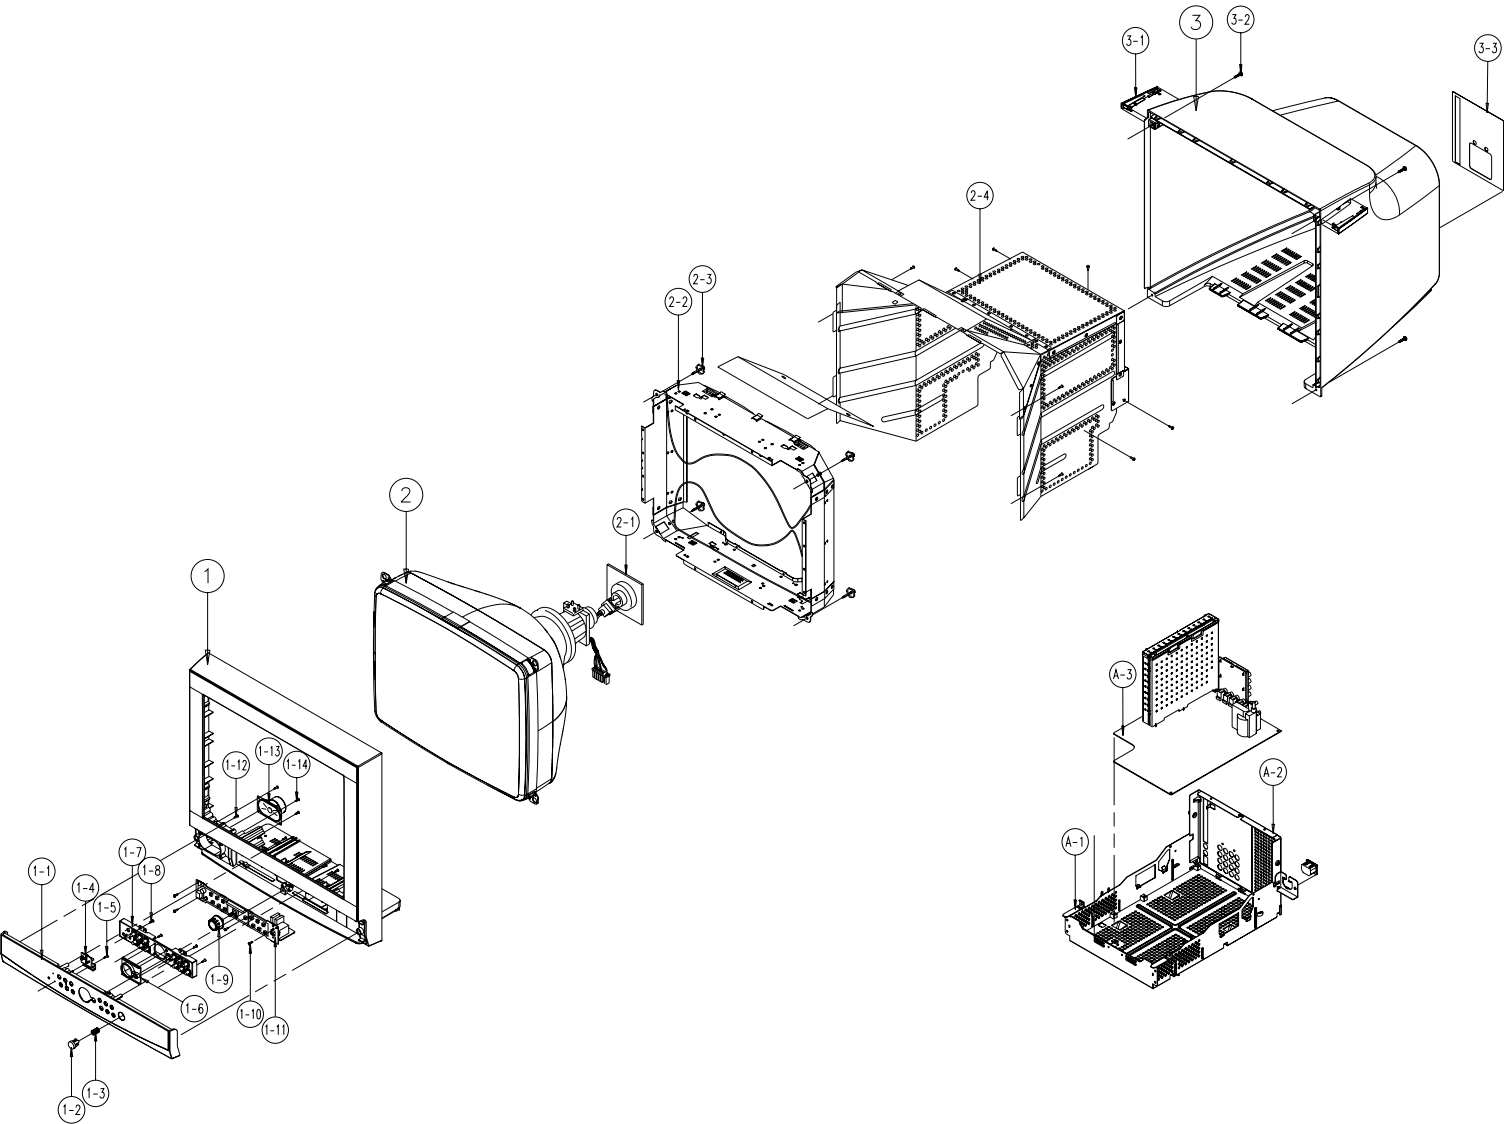

| No | Code No | Description | Specification | Q'ty | Remark | S.N.A |
|------|-------------|--|---------------|------|--------|-------|
| 1 | AA96-01307A | ASSY COVER P-FRONT;SMO-210TPV | | 1 | | |
| 1* | AA64-03279A | CABINET-FRONT;210TP,ABS HB,IV16 | | 1 | | |
| 1-1 | AA64-03283A | PANEL-CONTROL;210TP,ABS,HB,IV16 | | 1 | | |
| 1-2 | AA64-03286A | KNOB-POWER;210TP,ABS,HB,IV16 | | 1 | | |
| 1-3 | AA61-60003J | SPRING ETC-CS;-;SUS304,-,-,OD6,N7,OD6,-, | | 1 | KNOPOW | S.N.A |
| 1-4 | AA64-03289A | WINDOW-RMC;LED;210PT,PC CLR | | 1 | | |
| 1-5 | 6003-001019 | SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR | | 1 | W/RL+P | S.N.A |
| 1-6 | AA64-03288A | DECORATION-ROTARY;210TP,ABS,HB,IV16,SVM3 | | 1 | | |
| 1-7 | AA64-03285A | KNOB-CONTROL;210TP,ABS,HB,IV16 | | 1 | | |
| 1-8 | 6003-001019 | SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR | | 4 | K/C+P/ | S.N.A |
| 1-9 | AA64-03287A | KNOB-ROTARY;210TP,ABS,HB,IV16 | | 1 | P/CTRL | S.N.A |
| 1-10 | 6003-001019 | SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR | | 4 | P/CTRL | S.N.A |
| 1-11 | AA41-00829A | PCB-CONTROL;SM5-210TP,CEM-1,1L,A,1.6T,24 | | 1 | | |
| 1-12 | 6003-001019 | SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR | | 5 | P/F+C/ | S.N.A |
| 1-13 | 3001-001186 | SPEAKER;3W,8OHM,80°æ2DB,270HZ | | 1 | | |
| 1-14 | 6003-001023 | SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW | | 4 | SPK+C/ | S.N.A |
| 2 | AA91-06042A | ASSY CPT;SMO-210TPV | | 1 | * | S.N.A |
| 2-1 | 3704-001105 | SOCKET-CRT;11P,20PI,26.5PI,NI,- | | 1 | V999S | |
| 2-2 | AA96-01311A | ASSY MISC P-BRACKET CRT;210TP,SECC,T1.0, | | 1 | | |
| 2-3 | AA60-10050R | SCREW-ASSY;-;SWRCH18A,M5,L31.5,HH,+,WC,- | | 4 | B/CRT+ | S.N.A |
| 2-4 | AA96-01310A | ASSY MISC P-SHIELD TOP;210TP,AL1050S,T0. | | 1 | | |
| 3 | AA64-03280A | CABINET-BACK;210TP,ABS HB,IV16 | | 1 | | |
| 3-1 | AA63-00649A | COVER-SCREW;210TP,ABS HB,IV16 | | 2 | | |
| 3-2 | 6003-000009 | SCREW-TAPTITE;BH,+,B,M4,L16,ZPC(YEL),SWR | | 4 | C/B+C/ | S.N.A |
| 3-3 | AA64-03290A | INLAY-BACK;210TP,PS SHEET,T0.5 | | 1 | | |
| A-1 | AA61-01269A | BRACKET-CHASSIS;210TP,SECC,T1.0 | | 1 | | |
| A-2 | AA61-01268A | BRACKET-TERMINAL;210TP,SECC,T1.0 | | 1 | | |
| A-3 | AA94-12555A | ASSY PCB MAIN;SMO-210TPV,KS6A | | 1 | | S.N.A |

6. Electrical Parts List

6-1 SM0-150TPV

| Level | Loc. No. | Code No. | Description ; Specification | Remark | Level | Loc. No. | Code No. | Description ; Specification | Remark |
|---------------------|----------|-------------|--|--------|-------|----------|-------------|--|--------|
| ASSY CHASSIS | | | | | | | | | |
| 1 | * | AA91-06046A | ASSY CHASSIS;SMO-150TPV | |4 | SW13 | 3404-000176 | SWITCH-TACT;12V,50mA,120gf,6x6mm,SPST | |
| ..2 | B/TER+ | 6003-001023 | SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW | S.N.A |4 | | AA41-00829A | PCB-CONTROL:SM5-210TPCEM-1,1LA,1.6T,24 | |
| ..2 | B/TER+ | 6003-001023 | SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW | S.N.A | ..2 | | AA94-12556A | ASSY PCB MAIN;SMO-150TPV,KS6A | S.N.A |
| ..2 | PM+B/C | 6003-001023 | SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW | S.N.A | ...3 | C801 | 2401-001426 | C-AL:470uF,20%,400V/GP,-,35x45mm,10 | |
| ..2 | | AA96-01309A | ASSY MISC P-BRACKET TERMINAL;210TP,SECC, | | ...3 | C818 | 2401-003633 | C-AL:220UF,20%,160V,GPST,22X25MM,10 | |
| ...3 | | AA61-01268A | BRACKET-TERMINAL;210TP,SECC,T1.0 | | ...3 | CN401 | AA60-40012D | PIN-GT,ASSY;T1.6,6-12.5,-,NYLON66 | S.N.A |
| ...3 | | AA64-03290A | INLAY-BACK;210TPPS SHEET,T0.5 | | ...3 | CN501A | AA39-20604A | LEAD CONNECTOR-ASSY;5/4P300/200MM,YBNH | |
| ..2 | | AA94-12562A | ASSY PCB MISC-MASTER;SMO-150TPV,KS6A | | ...3 | CNT01 | 3710-001208 | CONNECTOR-SOCKET;32P,2R,2.54mm,STRAIGHT, | |
| ...3 | B/M+M/ | 6001-000057 | SCREW-MACHINE;RH,+,M3,L6,ZPC(BLK),SWRCH1 | S.N.A | ...3 | CNT01+ | AA96-01395A | ASSY PCB P;SMO-210TP/150TP,KS6A,TTSEC,8C | S.N.A |
| ...3 | B/M+P/ | 6003-001023 | SCREW-TAPTITE;RWH,+,B,M3,L10,ZPC(YEL),SW | S.N.A | ...3 | CNT02 | 3710-001208 | CONNECTOR-SOCKET;32P,2R,2.54mm,STRAIGHT, | |
| △ | CN801 | AB39-30601H | LEAD CONNECTOR;YFH800-150,S,3P,300mm,161 | S.N.A | ...3 | CR402S | 2306-000166 | C-FILM,MPPF-220nF,5%,400V,TP,26x17x9,20m | |
| △ | SW801S | 3403-001130 | SWITCH-PUSH;250VAC,5A,SPST,OFF-ON-OFF,- | | △ | CR403S | 2306-000329 | C-FILM,MPPF-7nF,3%,1.6KV,TP,28.5x18.5x11 | |
| ...3 | | AA97-13773E | ASSY AUTO;SMO-150TPV,KS6A | | △ | CX801S | 2306-000318 | C-FILM,MPPF-220nF,20%,250V,TP,-,22.5mm | |
| ...4 | EY81 | 6042-000002 | EYELET;ID1.5,OD2,L3.1,SN,BSS3-E/EH | S.N.A | △ | CX802S | 2306-000318 | C-FILM,MPPF-220nF,20%,250V,TP,-,22.5mm | |
| ...4 | EY82 | 6042-000002 | EYELET;ID1.5,OD2,L3.1,SN,BSS3-E/EH | S.N.A | △ | CY801S | 2201-000446 | C-CERAMIC,DISC;3.3NF,20%,400V,Y5U,TP,15X | |
| ...4 | GT801 | AA60-40014A | PIN-GT,ASSY;AUTO | S.N.A | △ | D801S | AA96-00276A | ASSY H/S,-,BRIDGE,AA62-00052A,RBV606,WAS | S.N.A |
| ...4 | GT802 | AA60-40014A | PIN-GT,ASSY;AUTO | S.N.A | ...4 | | AA62-00052A | HEAT SINK-PS,-,-,SILVER,HOLE 18.5mm, 2 | S.N.A |
| ...4 | GT803 | AA60-40014A | PIN-GT,ASSY;AUTO | S.N.A | ...4 | | AA60-30003A | WASHER;T1.5,SBHG-1 | S.N.A |
| ...4 | GT804 | AA60-40014A | PIN-GT,ASSY;AUTO | S.N.A | ...4 | | 6003-000335 | SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR | S.N.A |
| ...4 | GT805 | AA60-40014A | PIN-GT,ASSY;AUTO | S.N.A | ...4 | | 0402-000549 | DIODE-BRIDGE;RBV606,600V,6A,-,BK | |
| ...4 | GT806 | AA60-40014A | PIN-GT,ASSY;AUTO | S.N.A | ...4 | | 0205-000129 | GREASE-SILICON;SC102,JAPAN | S.N.A |
| ...4 | | AA41-00832A | PCB-MASTER;SM5-210TPCEM-1,1LA,1.6T,245 | S.N.A | △ | D803 | 0402-000250 | DIODE-RECTIFIER;RG4C,1000V,1A,- | |
| ...3 | | AA61-00530B | BRACKET-MASTER;25M6,29M6,SECC | S.N.A | △ | D814 | 0402-000586 | DIODE-RECTIFIER;RK49,90V,3.5A,DO-201AD | |
| ...3 | | AA39-00340B | LEAD CONNECTOR;SMO-150TPUL1617#22,UL/CS | S.N.A | △ | FP801S | 3601-001007 | FUSE-CARTRIDGE;250V,6.3A,TIME-LAG,GLASS, | |
| ...3 | | 3301-001201 | CORE-FERRITE;AE,21x11x32mm,1500,280G | S.N.A | △ | GT201+ | AA39-00184B | LEAD CONNECTOR;KS6A/SMO-210TPUL1617#22, | |
| ..2 | | AA94-12560A | ASSY PCB MISC-REAR;SMO-210TPV,KS6A | | △ | IC201S | AA09-00370A | IC MICOM;TDA9380PS/N2/I,SMO-210TP,64P,3 | |
| ...3 | CN701 | 3711-002707 | CONNECTOR-HEADER;NOWALL,9P,1R,2.5mm,ANGL | | ...3 | IC202 | 0904-001121 | IC-I/O SUPPORT CHIP;8574,8BIT,DIP,16P,30 | |
| ...3 | CN702 | 3711-002707 | CONNECTOR-HEADER;NOWALL,9P,1R,2.5mm,ANGL | | ...3 | IC203 | 0904-001121 | IC-I/O SUPPORT CHIP;8574,8BIT,DIP,16P,30 | |
| ...3 | JACK10 | 3705-001186 | CONNECTOR-COAXIAL-BNC,FEMALE,10MOHM,75OH | | ...3 | IC301 | AA96-00244K | ASSY H/S,-,POWER,AA62-00046A,CS21K3N | S.N.A |
| ...3 | JACK10 | 3705-001186 | CONNECTOR-COAXIAL-BNC,FEMALE,10MOHM,75OH | | ...4 | CIS | 0205-001027 | OIL-SILICON;G746,-,- | S.N.A |
| ...3 | JACK10 | 3705-001186 | CONNECTOR-COAXIAL-BNC,FEMALE,10MOHM,75OH | | ...4 | CIS | 1204-000517 | IC-VERTICAL DEF;LA7845,SIP,7P,-,PLASTIC | |
| ...3 | JACK10 | 3705-001186 | CONNECTOR-COAXIAL-BNC,FEMALE,10MOHM,75OH | | ...4 | CIS | 6003-000335 | SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR | S.N.A |
| ...3 | JACK10 | 3705-001186 | CONNECTOR-COAXIAL-BNC,FEMALE,10MOHM,75OH | | ...4 | CIS | AA62-00046A | HEAT SINK-PS,-,-,T1.0,-,D1(DREAM) 60X25X | S.N.A |
| ...3 | JACK10 | 3705-001186 | CONNECTOR-COAXIAL-BNC,FEMALE,10MOHM,75OH | | ...3 | IC501 | AA96-50311A | ASSY H/S,-,VIDEO,AA62-30175D,TDA6107Q,- | S.N.A |
| ...3 | JACK10 | 3705-001186 | CONNECTOR-COAXIAL-BNC,FEMALE,10MOHM,75OH | | ...4 | | 1201-001159 | IC-VIDEO AMP;6107,ZSI9P,9P,-,SINGLE,-,PLA | |
| ...3 | JACK11 | 3705-001186 | CONNECTOR-COAXIAL-BNC,FEMALE,10MOHM,75OH | | ...4 | | 6003-000334 | SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR | S.N.A |
| ...3 | JACK11 | 3705-001186 | CONNECTOR-COAXIAL-BNC,FEMALE,10MOHM,75OH | | ...4 | | AA62-30175D | HEAT SINK-PS,-,SECC,T1.0,-,33X15X30 FT-2 | S.N.A |
| ...3 | JACK11 | 3705-001186 | CONNECTOR-COAXIAL-BNC,FEMALE,10MOHM,75OH | | ...3 | IC601 | 1201-001200 | IC-POWER AMP;7267,DIP8P,346MIL,SINGLE,3 | |
| ...3 | JACK11 | 3705-001186 | CONNECTOR-COAXIAL-BNC,FEMALE,10MOHM,75OH | | ...3 | IC602 | 0801-000961 | IC-CMOS LOGIC;4053,MUTIPLEXER,DIP,16P,30 | |
| ...3 | | AA63-00644A | SHIELD-JACK;210TP,SPT,TO.3 | S.N.A | △ | IC801S | AA96-50364C | ASSY H/S,-,POWER,AA62-30181A,STR-F6656,- | S.N.A |
| ...3 | | AA97-13773B | ASSY AUTO;SMO-210TPV,KS6A | | ...4 | | 0205-000129 | GREASE-SILICON;SC102,JAPAN | S.N.A |
| ...4 | | AA41-00831A | PCB-REAR BNC;SM5-210TPCEM-1,1LA,1.6T,2 | S.N.A | ...4 | | 6003-000333 | SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW | S.N.A |
| ..2 | | AA94-12558A | ASSY PCB MISC-CONTROL;SMO-210TPV,KS6A | | ...4 | | AA13-00018A | IC HYBRID;-STR-F6656,LF1351,SPIN,-,- | |
| ...3 | CNC901 | AA39-20112A | LEAD CONNECTOR-ASSY;9P,400,YBNH025-09,6 | | ...4 | | AA62-30181A | HEAT SINK-ES;A6063,EXTR,SILVER,WHT,ANOD, | S.N.A |
| ...3 | CNC902 | AA39-20070C | LEAD CONNECTOR-ASSY;7P,400,YBNH025-07,6 | | △ | IC804 | AA96-00245A | ASSY H/S,-,-,AA62-00055A,KA7632,- | S.N.A |
| ...3 | RM01 | AA32-00012A | MODULE REMOCON;ORC-50HF2,38KHZ,940NM,MES | | ...4 | | 1203-001939 | IC-POSIFIXED REG.;7632,SIP,10P,-,PLASTI | |
| ...3 | ROT01 | 3406-001083 | SWITCH-ROTARY;DC16V,10MA,-,7MM | | ...4 | | 6003-000334 | SCREW-TAPTITE;RH,+,2S,M3,L6,ZPC(YEL),SWR | S.N.A |
| ...3 | | 3301-001201 | CORE-FERRITE;AE,21x11x32mm,1500,280G | | ...4 | | AA62-00055A | HEAT SINK-PS,-,-,T1.0,-,35*15*25 D1,-,- | S.N.A |
| ...3 | | 3003-001066 | MIC-CONDENSOR;10V,0.3MA,-,40DB,2.2KOHM | | △ | IC805 | BP96-00020L | ASSY HEAT SINK P-H/S TR,SCREW,SI-8050,OI | |
| ...3 | | AA97-13773D | ASSY AUTO;SMO-210TPV,KS6A | | ...4 | CIS | 0205-001027 | OIL-SILICON;G746,-,- | S.N.A |
| ...4 | CC01 | 2401-002165 | C-AL;100uF,20%,16V,GP,TP6.3x7.5 | S.N.A | ...4 | CIS | 1203-002744 | IC-SWITCH REG.;SI-8050S,TO-220,5P,10X16 | |
| ...4 | DC01 | 0401-000005 | DIODE-SWITCHING;1N4148,100V,200mA,DO-35, | | ...4 | CIS | 6003-000335 | SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR | S.N.A |
| ...4 | DC02 | 0401-000005 | DIODE-SWITCHING;1N4148,100V,200mA,DO-35, | | ...4 | CIS | AA62-00045B | HEAT SINK-COMMANDO,AL1050,T1.0,H45.0 | S.N.A |
| ...4 | LD01 | 0601-000465 | LED-ROUND,GRN,5mm,565 | | △ | IC806 | BP96-00020M | ASSY HEAT SINK P-H/S TR,SCREW,FQFP85N06, | |
| ...4 | RC01 | 2001-000790 | R-CARBON;470OHM,5%,1/2W,AA,TP,3.3X9MM | | ...4 | CIS | 0205-001027 | OIL-SILICON;G746,-,- | S.N.A |
| ...4 | SW01 | 3404-000176 | SWITCH-TACT;12V,50mA,120gf,6x6mm,SPST | | ...4 | CIS | 0505-001655 | FET-SILICON;FQFP85N06,N,60,53A,0.010OHM, | |
| ...4 | SW02 | 3404-000176 | SWITCH-TACT;12V,50mA,120gf,6x6mm,SPST | | ...4 | CIS | 6003-000335 | SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR | S.N.A |
| ...4 | SW03 | 3404-000176 | SWITCH-TACT;12V,50mA,120gf,6x6mm,SPST | | ...4 | CIS | AA62-00045A | HEAT SINK-PS,-,-,T1.0,-,DREAM,-,-,-,- | S.N.A |
| ...4 | SW04 | 3404-000176 | SWITCH-TACT;12V,50mA,120gf,6x6mm,SPST | | ...3 | IC902 | 1103-001209 | IC-EEPROM;AT24C04-PC27,C,512Kx8BIT,DIP,8 | |
| ...4 | SW05 | 3404-000176 | SWITCH-TACT;12V,50mA,120gf,6x6mm,SPST | | ...3 | L607 | 3301-001456 | CORE-FERRITE;AE,15X 7X 18MM,-,- | |
| ...4 | SW06 | 3404-000176 | SWITCH-TACT;12V,50mA,120gf,6x6mm,SPST | | ...3 | L807 | AA27-00098A | COIL CHOKE;-,-,24uH,10%,0.1,3.0A,DR10X | |
| ...4 | SW07 | 3404-000176 | SWITCH-TACT;12V,50mA,120gf,6x6mm,SPST | | ...3 | L813 | AA27-10004E | COIL CHOKE;-,-,40uH,10%,0.1,3.0A,DR10X | |
| ...4 | SW08 | 3404-000176 | SWITCH-TACT;12V,50mA,120gf,6x6mm,SPST | | △ | LR401S | AA27-30003L | COIL LINEARITY;-,-,73uH,DR12x15,0.55mm,-,B | |
| ...4 | SW09 | 3404-000176 | SWITCH-TACT;12V,50mA,120gf,6x6mm,SPST | | △ | LR801S | AA29-00011A | FILTER LINE NOISE;CZ32W8,-,0.20MAX,1.5KV | |
| ...4 | SW10 | 3404-000176 | SWITCH-TACT;12V,50mA,120gf,6x6mm,SPST | | △ | PC801S | 0604-001032 | PHOTO-COUPLER;TR,170-260%,300mW,DIP,4,ST | |
| ...4 | SW11 | 3404-000176 | SWITCH-TACT;12V,50mA,120gf,6x6mm,SPST | | ...3 | PFC01 | AA27-00116A | COIL CHOKE;CODE_NO,-,35mH,-,0,+5%,2.80 | |
| ...4 | SW12 | 3404-000176 | SWITCH-TACT;12V,50mA,120gf,6x6mm,SPST | | △ | PT801S | 1404-001026 | THERMISTOR-PTC;70hm,20%,0,-,290V,25A,-,ST | |

Electrical Parts List

| Level | Loc. No. | Code No. | Description ; Specification | Remark |
|-------|----------|-------------|--|--------|
| ... | Q401 | AA96-00624A | ASSY H/S; :POWER,AA62-00057A,KSD5703,WAS | S.N.A |
| ... | ... | AA62-00057A | HEAT SINK-PS-; ,T1.0,-.41*20*60,D2; , | S.N.A |
| ... | ... | AA60-30001A | WASHER-PLATE:M3,ID3.5,15X8.5,T1.0,SBHG | S.N.A |
| ... | ... | 6003-000333 | SCREW-TAPTITE:RH,+2S,M3,L10,ZPC(YEL),SW | S.N.A |
| ... | ... | 0502-001136 | TR-POWER:KSD5703,NPN,70W,TO-3PF,ST,8- | |
| ... | ... | 0205-000129 | GREASE-SILICON:SC102,JAPAN | S.N.A |
| △ | T401 | AA26-50001R | TRANS-HORIZ.DRIVE;-; ,80MH; ,520UH; , | |
| △ | T444S | AA26-00057A | TRANS FBT;-FUH-29A001B(S),25/29,130 | |
| △ | T801S | AA26-00188A | TRANS SWITCHING:49B125,DIY,90-264V,PL5,P | |
| △ | V999S | 3704-001105 | SOCKET-CRT;11P,20PI,26.5PI,Ni- | |
| ... | ... | 3301-001201 | CORE-FERRITE:AE,21x11x32mm,1500,280G | |
| ... | ... | AA97-13773A | ASSY AUTO-SMO-150TPV,KS6A | |
| ... | C201 | 2202-002037 | C-CERAMIC,MLC-AXIAL:100nF,80-20%,50V,Y5V | |
| ... | C203 | 2401-000480 | C-AL:10uF,20%,50V,GP,TP5x11.5 | |
| ... | C205 | 2202-000849 | C-CERAMIC,MLC-AXIAL:0.018nF,5%,50V,COG,T | |
| ... | C206 | 2401-000444 | C-AL:10uF,20%,25V,GP,TP5x5mm,5mm | |
| ... | C207 | 2305-000665 | C-FILM,MPEF:100nF,5%,63V,TP7.5x4.0x5.0m | |
| ... | C208 | 2305-000665 | C-FILM,MPEF:100nF,5%,63V,TP7.5x4.0x5.0m | |
| ... | C209 | 2401-002009 | C-AL:100uF,20%,16V,GP,TP6.3x7.5 | |
| ... | C210 | 2305-000665 | C-FILM,MPEF:100nF,5%,63V,TP7.5x4.0x5.0m | |
| ... | C211 | 2202-000632 | C-CERAMIC,MLC-AXIAL:100nF,20%,50V,Z5U,TP | |
| ... | C216 | 2305-000289 | C-FILM,MPEF:220nF,5%,63V,TP;-5mm | |
| ... | C217 | 2301-000342 | C-FILM,PEF:2.2nF,5%,50V,TP7.4x3.9x13mm, | |
| ... | C218 | 2305-000665 | C-FILM,MPEF:100nF,5%,63V,TP7.5x4.0x5.0m | |
| ... | C219 | 2401-000603 | C-AL:1uF,20%,50V,GP,TP5x11.5 | |
| ... | C220 | 2401-000426 | C-AL:10uF,20%,16V,GP,TP3.5x5.5 | |
| ... | C221 | 2401-000660 | C-AL:2.2uF,20%,50V,GP,TP5x11.5 | |
| ... | C222 | 2401-000215 | C-AL:0.1uF,20%,50V,GP,TP4x7MM,5 | |
| ... | C223 | 2202-000796 | C-CERAMIC,MLC-AXIAL:1nF,10%,50V,Y5P,TP3 | |
| ... | C224 | 2202-000796 | C-CERAMIC,MLC-AXIAL:1nF,10%,50V,Y5P,TP3 | |
| ... | C225 | 2309-000138 | C-FILM,PE-PPF:100nF,5%,50V,TP20x16x8.5 | |
| ... | C226 | 2202-000829 | C-CERAMIC,MLC-AXIAL:0.82nF,10%,50V,Y5P,T | |
| ... | C227 | 2301-000445 | C-FILM,PEF:4.7nF,5%,50V,TP5.5x7x3mm,5mm | |
| ... | C228 | 2401-002075 | C-AL:4.7uF,20%,50V,GP,TP5x11.5 | |
| ... | C229 | 2401-002009 | C-AL:100uF,20%,16V,GP,TP6.3x7.5 | |
| ... | C230 | 2305-000665 | C-FILM,MPEF:100nF,5%,63V,TP7.5x4.0x5.0m | |
| ... | C231 | 2401-000426 | C-AL:10uF,20%,16V,GP,TP3.5x5.5 | |
| ... | C233 | 2305-000289 | C-FILM,MPEF:220nF,5%,63V,TP;-5mm | |
| ... | C234 | 2305-000289 | C-FILM,MPEF:220nF,5%,63V,TP;-5mm | |
| ... | C248 | 2301-000445 | C-FILM,PEF:4.7nF,5%,50V,TP5.5x7x3mm,5mm | |
| ... | C301 | 2305-000285 | C-FILM,MPEF:220nF,5%,100V,TP10.5X5.5X15 | |
| ... | C302 | 2201-000259 | C-CERAMIC,DISC:0.18nF,10%,500V,Y5P,TP5. | |
| ... | C303 | 2201-000556 | C-CERAMIC,DISC:0.47nF,10%,500V,Y5P,TP5. | |
| ... | C304 | 2401-002288 | C-AL:470uF,20%,25V,WT,TP10x20.5 | |
| ... | C305 | 2201-000556 | C-CERAMIC,DISC:0.47nF,10%,500V,Y5P,TP5. | |
| ... | C306 | 2401-002288 | C-AL:470uF,20%,25V,WT,TP10x20.5 | |
| ... | C307 | 2401-000365 | C-AL:100uF,20%,50V,WT,TP10x12.5mm, | |
| ... | C308 | 2401-000365 | C-AL:100uF,20%,50V,WT,TP10x12.5mm, | |
| ... | C309 | 2301-000254 | C-FILM,PEF:39nF,5%,50V,TP7.5x3.5x6.5mm, | |
| ... | C312 | 2305-000149 | C-FILM,MPEF:100nF,5%,100V,TP12x12.5x6.5 | |
| ... | C402 | 2201-000132 | C-CERAMIC,DISC:0.1nF,10%,500V,Y5P,TP6.5 | |
| ... | C403 | 2401-002267 | C-AL:2.2uF,20%,25V,GP,TP8x11.5,5 | |
| ... | C406 | 2401-000302 | C-AL:100uF,20%,25V,GP,TP6.3x11.5 | |
| ... | C407 | 2301-000383 | C-FILM,PEF:1nF,5%,50V,TP6x7x3.2mm,5mm | |
| ... | C408 | 2201-000599 | C-CERAMIC,DISC:0.56nF,10%,500V,Y5P,TP5. | |
| ... | C420 | 2301-001065 | C-FILM,MPPF:47nF,5%,630V,TP19x15.5x7.7. | |
| ... | C504 | 2301-000213 | C-FILM,PEF:220nF,5%,250V,TP21.5x11.7,5 | |
| ... | C505 | 2202-000825 | C-CERAMIC,MLC-AXIAL:680pF,10%,50V,Y5P,TP | |
| ... | C506 | 2401-001872 | C-AL:10uF,20%,250V,WT,TP10x16.5 | |
| ... | C507 | 2401-001232 | C-AL:4.7uF,20%,250V,GP,TP10x12.5,5 | |
| ... | C508 | 2201-000723 | C-CERAMIC,DISC:4.7nF,20%,3KV,Y5U,TP,16X5 | |
| ... | C601 | 2401-000703 | C-AL:2200uF,20%,25V,GP;-12.5x25mm, | |
| ... | C602 | 2401-001397 | C-AL:470uF,20%,25V,GP,TP10x16.5 | |
| ... | C603 | 2401-002619 | C-AL:47uF,20%,25V,GP,TP5x11.5 | |
| ... | C604 | 2301-000224 | C-FILM,PEF:22nF,5%,50V,TP7.4x3.9x13mm,5 | |
| ... | C605 | 2401-000444 | C-AL:10uF,20%,25V,GP,TP5x5mm,5mm | |
| ... | C606 | 2301-000192 | C-FILM,PEF:1nF,5%,50V,TP5.3x10mm,5mm | |
| ... | C607 | 2401-000444 | C-AL:10uF,20%,25V,GP,TP5x5mm,5mm | |
| ... | C608 | 2401-000603 | C-AL:1uF,20%,50V,GP,TP5x11.5 | |
| ... | C609 | 2301-000192 | C-FILM,PEF:1nF,5%,50V,TP5.3x10mm,5mm | |
| ... | C610 | 2401-000444 | C-AL:10uF,20%,25V,GP,TP5x5mm,5mm | |
| ... | C611 | 2401-000620 | C-AL:2.2uF,10%,50V,GP,TP5x11.5 | |
| ... | C612 | 2401-002619 | C-AL:47uF,20%,25V,GP,TP5x11.5 | |
| ... | C701 | 2202-000121 | C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP | |
| ... | C702 | 2202-000121 | C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP | |
| ... | C703 | 2202-000121 | C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP | |

| Level | Loc. No. | Code No. | Description ; Specification | Remark |
|-------|----------|-------------|--|--------|
| ... | C704 | 2202-000121 | C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP | |
| ... | C705 | 2202-000121 | C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP | |
| ... | C706 | 2202-000121 | C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP | |
| ... | C707 | 2202-000121 | C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP | |
| ... | C708 | 2202-000121 | C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP | |
| ... | C802 | 2301-001065 | C-FILM,MPPF:47nF,5%,630V,TP19x15.5x7.7. | |
| ... | C803 | 2301-001342 | C-FILM,PPF:1.5nF,5%,800V,TP15x6.5x11.5m | |
| ... | C804 | 2201-000281 | C-CERAMIC,DISC:1nF,+80-20%,50V,Y5V,TP5X | |
| ... | C805 | 2202-000561 | C-CERAMIC,MLC-RADIAL:0.68nF,5%,50V,COG,T | |
| ... | C806 | 2401-000360 | C-AL:100uF,20%,50V,GP,TP8x11.5,5 | |
| ... | C808 | 2201-000991 | C-CERAMIC,DISC:0.56nF,10%,2KV,Y5P,TP7.5 | |
| ... | C809 | 2401-001998 | C-AL:1000uF,20%,25V,GP,TP10x20.5mm | |
| ... | C810 | 2201-000991 | C-CERAMIC,DISC:0.56nF,10%,2KV,Y5P,TP7.5 | |
| ... | C811 | 2401-000703 | C-AL:2200uF,20%,25V,GP;-12.5x25mm, | |
| ... | C812 | 2201-000991 | C-CERAMIC,DISC:0.56nF,10%,2KV,Y5P,TP7.5 | |
| ... | C813 | 2401-003141 | C-AL:2200uF,20%,25V,WT,TP13x25.5mm | |
| ... | C814 | 2301-000224 | C-FILM,PEF:22nF,5%,50V,TP7.4x3.9x13mm,5 | |
| ... | C815 | 2201-000375 | C-CERAMIC,DISC:0.22nF,5%,50V,RH,TP12.5X | |
| ... | C816 | 2401-000262 | C-AL:100uF,20%,160V,HR,TP16x25.7,5 | |
| ... | C817 | 2201-000991 | C-CERAMIC,DISC:0.56nF,10%,2KV,Y5P,TP7.5 | |
| ... | C819 | 2401-000703 | C-AL:2200uF,20%,25V,GP;-12.5x25mm, | |
| ... | C820 | 2305-000665 | C-FILM,MPEF:100nF,5%,63V,TP7.5x4.0x5.0m | |
| ... | C821 | 2305-000665 | C-FILM,MPEF:100nF,5%,63V,TP7.5x4.0x5.0m | |
| ... | C822 | 2401-000703 | C-AL:2200uF,20%,25V,GP;-12.5x25mm, | |
| ... | C823 | 2201-000315 | C-CERAMIC,DISC:2.2nF,+80-20%,250V,Y5U,TP | |
| ... | C824 | 2201-000315 | C-CERAMIC,DISC:2.2nF,+80-20%,250V,Y5U,TP | |
| ... | C825 | 2401-003028 | C-AL:100uF,20%,25V,WT,TP6.3x11.5 | |
| ... | C826 | 2401-003028 | C-AL:100uF,20%,25V,WT,TP6.3x11.5 | |
| ... | C827 | 2401-000040 | C-AL:47uF,20%,250V,WT,TP16x25mm,7. | |
| ... | C828 | 2401-000302 | C-AL:100uF,20%,25V,GP,TP6.3x11.5 | |
| ... | C829 | 2401-000302 | C-AL:100uF,20%,25V,GP,TP6.3x11.5 | |
| ... | C830 | 2305-000665 | C-FILM,MPEF:100nF,5%,63V,TP7.5x4.0x5.0m | |
| ... | C833 | 2401-000481 | C-AL:10uF,20%,50V,WT,TP5x11.5 | |
| ... | C834 | 2401-000173 | C-AL:1000uF,20%,35V,GP,TP13x25.5 | |
| ... | C835 | 2201-000551 | C-CERAMIC,DISC:0.47nF,10%,1KV,Y5P,TP6.3 | |
| ... | C836 | 2401-002289 | C-AL:470uF,20%,35V,WT,TP10x20.5 | |
| ... | C837 | 2401-000689 | C-AL:2200uF,20%,16V,GP,TP13x25.5 | |
| ... | C842 | 2201-000551 | C-CERAMIC,DISC:0.47nF,10%,1KV,Y5P,TP6.3 | |
| ... | C901 | 2401-001537 | C-AL:47uF,20%,25V,GP,TP6.3x7mm,5mm | |
| ... | C902 | 2401-002144 | C-AL:47uF,20%,16V,GP,TP5x11.5 | |
| ... | C903 | 2401-002009 | C-AL:100uF,20%,16V,GP,TP6.3x7.5 | |
| ... | C904 | 2401-000480 | C-AL:10uF,20%,50V,GP,TP5x11.5 | |
| ... | C905 | 2401-001537 | C-AL:47uF,20%,25V,GP,TP6.3x7mm,5mm | |
| ... | C906 | 2301-000402 | C-FILM,PEF:1nF,5%,50V,TP5x7x2.8mm,5mm | |
| ... | C907 | 2201-000119 | C-CERAMIC,DISC:100nF,+80-20%,50V,Y5V,TP, | |
| ... | C908 | 2201-000573 | C-CERAMIC,DISC:0.047nF,5%,50V,COG,TP5X3 | |
| ... | C909 | 2201-000573 | C-CERAMIC,DISC:0.047nF,5%,50V,COG,TP5X3 | |
| ... | C910 | 2401-002009 | C-AL:100uF,20%,16V,GP,TP6.3x7.5 | |
| ... | C911 | 2202-000796 | C-CERAMIC,MLC-AXIAL:1nF,10%,50V,Y5P,TP3 | |
| ... | C912 | 2202-000796 | C-CERAMIC,MLC-AXIAL:1nF,10%,50V,Y5P,TP3 | |
| ... | C913 | 2305-000665 | C-FILM,MPEF:100nF,5%,63V,TP7.5x4.0x5.0m | |
| ... | C916 | 2305-000665 | C-FILM,MPEF:100nF,5%,63V,TP7.5x4.0x5.0m | |
| ... | C920 | 2305-000665 | C-FILM,MPEF:100nF,5%,63V,TP7.5x4.0x5.0m | |
| △ | CN601 | 3711-002642 | CONNECTOR-HEADER:BOX,3P,1R,2.5mm,STRAIGH | |
| ... | CN901 | 3711-002648 | CONNECTOR-HEADER:BOX,9P,1R,2.5mm,STRAIGH | |
| ... | CN902 | 3711-002646 | CONNECTOR-HEADER:BOX,7P,1R,2.5mm,STRAIGH | |
| △ | CR404S | 2201-000639 | C-CERAMIC,DISC:0.68nF,10%,2KV,Y5P,TP9X5 | |
| ... | CR405 | 2305-000382 | C-FILM,MPEF:4.7nF,5%,400V,TP;-5mm | |
| ... | CS901 | 2202-000796 | C-CERAMIC,MLC-AXIAL:1nF,10%,50V,Y5P,TP3 | |
| ... | CS902 | 2202-000796 | C-CERAMIC,MLC-AXIAL:1nF,10%,50V,Y5P,TP3 | |
| ... | CS903 | 2202-000796 | C-CERAMIC,MLC-AXIAL:1nF,10%,50V,Y5P,TP3 | |
| ... | CS904 | 2202-000796 | C-CERAMIC,MLC-AXIAL:1nF,10%,50V,Y5P,TP3 | |
| ... | D201 | 0401-000005 | DIODE-SWITCHING;1N4148,100V,200mA,DO-35, | |
| ... | D301 | 0402-000534 | DIODE-RECTIFIER:RG10V,400V,1.2A,DO-201,T | |
| ... | D302 | 0402-000540 | DIODE-RECTIFIER:RU20A,600V,1.5A,-,TP | |
| ... | D303 | 0402-000132 | DIODE-RECTIFIER:1N4004,400V,1A,DO-41,TP | |
| ... | D304 | 0402-000546 | DIODE-RECTIFIER:TVR10G,400V,1.0A,DO-41,T | |
| △ | D401 | 0402-000493 | DIODE-RECTIFIER:1R5GU41,400V,1.5A,DO-15L | |
| ... | D501 | 0402-001105 | DIODE-RECTIFIER:ERB43-04SV1,400V,1.0A,-, | |
| ... | D502 | 0402-001105 | DIODE-RECTIFIER:ERB43-04SV1,400V,1.0A,-, | |
| ... | D503 | 0402-001105 | DIODE-RECTIFIER:ERB43-04SV1,400V,1.0A,-, | |
| ... | D504 | 0402-001105 | DIODE-RECTIFIER:ERB43-04SV1,400V,1.0A,-, | |
| △ | D802 | 0402-001111 | DIODE-RECTIFIER:1N5397GP,600V,1.5A,DO-20 | |
| △ | D804 | 0402-000546 | DIODE-RECTIFIER:TVR10G,400V,1.0A,DO-41,T | |
| △ | D805 | 0402-000546 | DIODE-RECTIFIER:TVR10G,400V,1.0A,DO-41,T | |
| △ | D806 | 0402-000546 | DIODE-RECTIFIER:TVR10G,400V,1.0A,DO-41,T | |

[illegible]

| Level | Loc. No. | Code No. | Description ; Specification | Remark | Level | Loc. No. | Code No. | Description ; Specification | Remark |
|-------|----------|----------|--|--------|-------|----------|----------|--|--------|
| ... | 4 | EY842 | 6042-000002 EYELET;ID1.5,OD2,L3.1,SN,BSS3-E/EH | S.N.A | ... | 4 | L904 | 2701-000158 INDUCTOR-AXIAL:22uH,10%,2.5x3.4mm | |
| ... | 4 | EY843 | 6042-000002 EYELET;ID1.5,OD2,L3.1,SN,BSS3-E/EH | S.N.A | △ | 4 | NT801S | 1404-001045 THERMISTOR-NTC:4.7ohm,15%,2900K,35.0mW,T | |
| ... | 4 | EY844 | 6042-000002 EYELET;ID1.5,OD2,L3.1,SN,BSS3-E/EH | S.N.A | ... | 4 | Q201 | 0501-000283 TR-SMALL SIGNAL:KSA539,PNP,400mW,T0-92,T | |
| ... | 4 | EY845 | 6042-000002 EYELET;ID1.5,OD2,L3.1,SN,BSS3-E/EH | S.N.A | ... | 4 | Q402 | 0502-001007 TR-POWER:KSC2073-H2,NPN,25W,T0-220,ST,6 | |
| ... | 4 | EY846 | 6042-000002 EYELET;ID1.5,OD2,L3.1,SN,BSS3-E/EH | S.N.A | ... | 4 | Q601 | 0501-000389 TR-SMALL SIGNAL:KSC815,NPN,400mW,T0-92,T | |
| ... | 4 | EY847 | 6042-000002 EYELET;ID1.5,OD2,L3.1,SN,BSS3-E/EH | S.N.A | ... | 4 | Q603 | 0501-000389 TR-SMALL SIGNAL:KSC815,NPN,400mW,T0-92,T | |
| ... | 4 | EY848 | 6042-000002 EYELET;ID1.5,OD2,L3.1,SN,BSS3-E/EH | S.N.A | ... | 4 | Q604 | 0501-000389 TR-SMALL SIGNAL:KSC815,NPN,400mW,T0-92,T | |
| ... | 4 | EY849 | 6042-000002 EYELET;ID1.5,OD2,L3.1,SN,BSS3-E/EH | S.N.A | ... | 4 | Q605 | 0501-000389 TR-SMALL SIGNAL:KSC815,NPN,400mW,T0-92,T | |
| ... | 4 | EY850 | 6042-000002 EYELET;ID1.5,OD2,L3.1,SN,BSS3-E/EH | S.N.A | ... | 4 | Q802 | 0501-000389 TR-SMALL SIGNAL:KSC815,NPN,400mW,T0-92,T | |
| ... | 4 | EY851 | 6042-000002 EYELET;ID1.5,OD2,L3.1,SN,BSS3-E/EH | S.N.A | ... | 4 | Q804 | 0501-000389 TR-SMALL SIGNAL:KSC815,NPN,400mW,T0-92,T | |
| ... | 4 | EY852 | 6042-000002 EYELET;ID1.5,OD2,L3.1,SN,BSS3-E/EH | S.N.A | ... | 4 | Q901 | 0501-000389 TR-SMALL SIGNAL:KSC815,NPN,400mW,T0-92,T | |
| ... | 4 | EY853 | 6042-000002 EYELET;ID1.5,OD2,L3.1,SN,BSS3-E/EH | S.N.A | ... | 4 | Q101 | 0501-000389 TR-SMALL SIGNAL:KSC815,NPN,400mW,T0-92,T | |
| ... | 4 | EY854 | 6042-000002 EYELET;ID1.5,OD2,L3.1,SN,BSS3-E/EH | S.N.A | ... | 4 | R201 | 2001-001187 R-CARBON(S):750HM,5%,1/2W,AA,TP2.4x6.4M | |
| ... | 4 | EY855 | 6042-000002 EYELET;ID1.5,OD2,L3.1,SN,BSS3-E/EH | S.N.A | ... | 4 | R202 | 2001-000645 R-CARBON:330KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | 4 | EY856 | 6042-000002 EYELET;ID1.5,OD2,L3.1,SN,BSS3-E/EH | S.N.A | ... | 4 | R203 | 2001-000857 R-CARBON:560KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | 4 | EY857 | 6042-000002 EYELET;ID1.5,OD2,L3.1,SN,BSS3-E/EH | S.N.A | ... | 4 | R204 | 2001-000563 R-CARBON:27KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | 4 | EY858 | 6042-000002 EYELET;ID1.5,OD2,L3.1,SN,BSS3-E/EH | S.N.A | ... | 4 | R205 | 2001-000397 R-CARBON:180KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | 4 | F801A | 3602-000114 FUSE-HOLDER:-,30mohm | | ... | 4 | R206 | 2001-000010 R-CARBON:68KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | 4 | F801B | 3602-000114 FUSE-HOLDER:-,30mohm | | ... | 4 | R207 | 2001-001187 R-CARBON(S):750HM,5%,1/2W,AA,TP2.4x6.4M | |
| △ | 4 | FD601S | 3601-000102 FUSE-AXIAL LEAD:125V,1A,FAST-ACTING,GLAS | | ... | 4 | R208 | 2001-000591 R-CARBON:3.3KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| △ | 4 | FD801S | 3601-001086 FUSE-AXIAL LEAD:125V,5A,FAST-ACTING,GLAS | | ... | 4 | R215 | 2001-000281 R-CARBON:1000HM,5%,1/8W,AA,TP1.8X3.2MM | |
| △ | 4 | FD802S | 3601-001228 FUSE-AXIAL LEAD:125V,10A,FAST-ACTING,EPO | | ... | 4 | R216 | 2001-000281 R-CARBON:1000HM,5%,1/8W,AA,TP1.8X3.2MM | |
| △ | 4 | FD803S | 3601-001228 FUSE-AXIAL LEAD:125V,10A,FAST-ACTING,EPO | | ... | 4 | R217 | 2001-000281 R-CARBON:1000HM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | 4 | GT101 | AA60-40014A PIN-GT,ASSY:AUTO | S.N.A | ... | 4 | R218 | 2001-000522 R-CARBON:22KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | 4 | GT102 | AA60-40014A PIN-GT,ASSY:AUTO | S.N.A | ... | 4 | R219 | 2004-001914 R-METAL:39Kohm,2%,1/8W,AA,TP1.8x3.5mm | |
| ... | 4 | GT201 | AA60-40014A PIN-GT,ASSY:AUTO | S.N.A | ... | 4 | R220 | 2001-000472 R-CARBON:2.7KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | 4 | GT403 | AA60-40014A PIN-GT,ASSY:AUTO | S.N.A | ... | 4 | R222 | 2001-000281 R-CARBON:1000HM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | 4 | GT501 | AA60-40014A PIN-GT,ASSY:AUTO | S.N.A | ... | 4 | R223 | 2001-000281 R-CARBON:1000HM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | 4 | GT502 | AA60-40014A PIN-GT,ASSY:AUTO | S.N.A | ... | 4 | R224 | 2001-000290 R-CARBON:10KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | 4 | GT503 | AA60-40014A PIN-GT,ASSY:AUTO | S.N.A | ... | 4 | R227 | 2001-000739 R-CARBON:4.7MOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | 4 | GT801A | AA60-40014A PIN-GT,ASSY:AUTO | S.N.A | ... | 4 | R228 | 2001-000739 R-CARBON:4.7MOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | 4 | GT802A | AA60-40014A PIN-GT,ASSY:AUTO | S.N.A | ... | 4 | R229 | 2001-000429 R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | 4 | GT803A | AA60-40014A PIN-GT,ASSY:AUTO | S.N.A | ... | 4 | R230 | 2001-000290 R-CARBON:10KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | 4 | GT804 | AA60-40014A PIN-GT,ASSY:AUTO | S.N.A | ... | 4 | R231 | 2001-000472 R-CARBON:2.7KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | 4 | GT805 | AA60-40014A PIN-GT,ASSY:AUTO | S.N.A | ... | 4 | R232 | 2001-000780 R-CARBON:4700HM,5%,1/8W,AA,TP1.8X3.2MM | |
| △ | 4 | IC803 | 1203-001217 IC-POS,ADJUST REG.:431,T0-92,3P4.58MIL | | ... | 4 | R233 | 2001-000281 R-CARBON:1000HM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | 4 | J402 | 2001-001043 R-CARBON(S):00HM,5%,1/2W,AA,TP2.4x6.4MM | | ... | 4 | R234 | 2001-000281 R-CARBON:1000HM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | 4 | J903 | 2001-000281 R-CARBON:1000HM,5%,1/8W,AA,TP1.8X3.2MM | | ... | 4 | R235 | 2001-000281 R-CARBON:1000HM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | 4 | J904 | 2001-000281 R-CARBON:1000HM,5%,1/8W,AA,TP1.8X3.2MM | | ... | 4 | R236 | 2001-000281 R-CARBON:1000HM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | 4 | L201 | 2701-000158 INDUCTOR-AXIAL:22uH,10%,2.5x3.4mm | | ... | 4 | R301 | 2001-000016 R-CARBON(S):10HM,5%,1/2W,AA,TP2.4x6.4MM | |
| ... | 4 | L202 | 2701-000191 INDUCTOR-AXIAL:47uH,10%,2.5x3.4mm | | ... | 4 | R302 | 2004-004097 R-METAL:1.6Kohm,2%,1/2W,AA,TP6.5x2.5m | |
| ... | 4 | L301 | 2701-000142 INDUCTOR-AXIAL:1uH,10%,2.5x3.4mm | | ... | 4 | R304 | 2008-001011 R-FUSIBLE(S):0.18ohm,10%,2W,AF,TP3.9x10 | |
| ... | 4 | L302 | 2701-000142 INDUCTOR-AXIAL:1uH,10%,2.5x3.4mm | | ... | 4 | R305 | 2008-001011 R-FUSIBLE(S):0.18ohm,10%,2W,AF,TP3.9x10 | |
| ... | 4 | L303 | 3301-000287 CORE-FERRITE BEAD:AA,3.5x1.0x6.0mm,1500, | | ... | 4 | R306 | 2004-001371 R-METAL(S):1.5Kohm,1%,1/2W,AA,TP2.4x6.4 | |
| ... | 4 | L304 | 3301-000287 CORE-FERRITE BEAD:AA,3.5x1.0x6.0mm,1500, | | ... | 4 | R315 | 2003-000652 R-METAL OXIDE(S):330ohm,5%,2W,AF,TP4x12 | |
| △ | 4 | L401 | 3301-000287 CORE-FERRITE BEAD:AA,3.5x1.0x6.0mm,1500, | | ... | 4 | R316 | 2003-000652 R-METAL OXIDE(S):330ohm,5%,2W,AF,TP4x12 | |
| △ | 4 | L402 | 2701-000142 INDUCTOR-AXIAL:1uH,10%,2.5x3.4mm | | ... | 4 | R317 | 2008-001076 R-FUSIBLE(S):1.8ohm,5%,2W,AF,TP3.9x10mm | |
| △ | 4 | L403 | 3301-000287 CORE-FERRITE BEAD:AA,3.5x1.0x6.0mm,1500, | | ... | 4 | R318 | 2008-000290 R-FUSIBLE(S):2.4ohm,5%,2W,AF,TP3.9x10mm | |
| ... | 4 | L404 | 3301-000287 CORE-FERRITE BEAD:AA,3.5x1.0x6.0mm,1500, | | ... | 4 | R402 | 2003-000540 R-METAL OXIDE(S):1Kohm,5%,2W,AF,TP4x12m | |
| ... | 4 | L501 | 2901-000297 FILTER-EMI ON BOARD:-,3A,-,3.5x5,TP- | | ... | 4 | R403 | 2003-002008 R-METAL OXIDE(S):18Kohm,5%,2W,AF,TP3.9x | |
| ... | 4 | L601 | 2701-000158 INDUCTOR-AXIAL:22uH,10%,2.5x3.4mm | | ... | 4 | R406 | 2001-001114 R-CARBON(S):2700HM,5%,1/2W,AA,TP2.4x6.4 | |
| ... | 4 | L607 | 3301-000287 CORE-FERRITE BEAD:AA,3.5x1.0x6.0mm,1500, | | ... | 4 | R408 | 2001-000020 R-CARBON(S):220HM,5%,1/2W,AA,TP2.4x6.4M | |
| ... | 4 | L608 | 3301-000287 CORE-FERRITE BEAD:AA,3.5x1.0x6.0mm,1500, | | ... | 4 | R411 | 2001-001114 R-CARBON(S):2700HM,5%,1/2W,AA,TP2.4x6.4 | |
| ... | 4 | L701 | 2701-000142 INDUCTOR-AXIAL:1uH,10%,2.5x3.4mm | | ... | 4 | R412 | 2004-001390 R-METAL(S):1Kohm,2%,1/2W,AA,TP2.4x6.4mm | |
| ... | 4 | L702 | 2701-000142 INDUCTOR-AXIAL:1uH,10%,2.5x3.4mm | | ... | 4 | R413 | 2003-002007 R-METAL OXIDE(S):4.7Kohm,5%,2W,AF,TP3.9 | |
| ... | 4 | L703 | 2701-000142 INDUCTOR-AXIAL:1uH,10%,2.5x3.4mm | | ... | 4 | R421 | 2008-001018 R-FUSIBLE(S):0.47ohm,10%,2W,AF,TP3.9x10 | |
| ... | 4 | L704 | 2701-000142 INDUCTOR-AXIAL:1uH,10%,2.5x3.4mm | | ... | 4 | R423 | 2004-001373 R-METAL(S):100Kohm,1%,1/2W,AA,TP2.4x6.4 | |
| ... | 4 | L705 | 2701-000142 INDUCTOR-AXIAL:1uH,10%,2.5x3.4mm | | ... | 4 | R424 | 2004-001402 R-METAL(S):6.8Kohm,1%,1/2W,AA,TP2.4x6.4 | |
| ... | 4 | L706 | 2701-000142 INDUCTOR-AXIAL:1uH,10%,2.5x3.4mm | | ... | 4 | R425 | 2008-000299 R-FUSIBLE(S):47ohm,5%,2W,AF,TP3.9x10mm | |
| ... | 4 | L707 | 2701-000142 INDUCTOR-AXIAL:1uH,10%,2.5x3.4mm | | ... | 4 | R426 | 2008-000206 R-FUSIBLE(S):1ohm,5%,1/2W,AF,TP2.5x6.5m | |
| ... | 4 | L708 | 2701-000142 INDUCTOR-AXIAL:1uH,10%,2.5x3.4mm | | ... | 4 | R430 | 2001-001122 R-CARBON(S):3.9KOHM,5%,1/2W,AA,TP2.4x6. | |
| ... | 4 | L801 | 3301-001223 CORE-FERRITE BEAD:AA,62ohm,3.5x0.8x5mm,- | | ... | 4 | R502H | 2002-001009 R-COMPOSITION:2.7Kohm,10%,1/2W,AA,TP3.7 | |
| ... | 4 | L802 | 3301-001223 CORE-FERRITE BEAD:AA,62ohm,3.5x0.8x5mm,- | | ... | 4 | R503H | 2002-001009 R-COMPOSITION:2.7Kohm,10%,1/2W,AA,TP3.7 | |
| ... | 4 | L803 | 3301-001223 CORE-FERRITE BEAD:AA,62ohm,3.5x0.8x5mm,- | | ... | 4 | R504 | 2001-000281 R-CARBON:1000HM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | 4 | L804 | 3301-001223 CORE-FERRITE BEAD:AA,62ohm,3.5x0.8x5mm,- | | ... | 4 | R505 | 2001-000281 R-CARBON:1000HM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | 4 | L805 | 3301-000287 CORE-FERRITE BEAD:AA,3.5x1.0x6.0mm,1500, | | ... | 4 | R506 | 2001-000281 R-CARBON:1000HM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | 4 | L806 | 2901-000297 FILTER-EMI ON BOARD:-,3A,-,3.5x5,TP- | | ... | 4 | R511H | 2002-001009 R-COMPOSITION:2.7Kohm,10%,1/2W,AA,TP3.7 | |
| ... | 4 | L808 | 3301-000287 CORE-FERRITE BEAD:AA,3.5x1.0x6.0mm,1500, | | ... | 4 | R513 | 2008-001137 R-FUSIBLE(S):3.3ohm,5%,1W,AF,TP3.9x10mm | |
| ... | 4 | L809 | 3301-000287 CORE-FERRITE BEAD:AA,3.5x1.0x6.0mm,1500, | | ... | 4 | R514 | 2001-001062 R-CARBON(S):10MOHM,5%,1/2W,AA,TP2.4x6.4 | |
| ... | 4 | L810 | 3301-000287 CORE-FERRITE BEAD:AA,3.5x1.0x6.0mm,1500, | | ... | 4 | R601 | 2001-000281 R-CARBON:1000HM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | 4 | L812 | 3301-000287 CORE-FERRITE BEAD:AA,3.5x1.0x6.0mm,1500, | | ... | 4 | R602 | 2001-000290 R-CARBON:10KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | 4 | L815 | 2901-000297 FILTER-EMI ON BOARD:-,3A,-,3.5x5,TP- | | ... | 4 | R603 | 2008-000266 R-FUSIBLE(S):1ohm,5%,2W,AF,TP3.9x10mm | |
| ... | 4 | L816 | 3301-000287 CORE-FERRITE BEAD:AA,3.5x1.0x6.0mm,1500, | | ... | 4 | R606 | 2001-000786 R-CARBON:47KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | 4 | L901 | 2701-000114 INDUCTOR-AXIAL:10uH,10%,2.5x3.4mm | | ... | 4 | R607 | 2001-000435 R-CARBON:1MOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | 4 | L902 | 2701-000158 INDUCTOR-AXIAL:22uH,10%,2.5x3.4mm | | ... | 4 | R608 | 2001-000812 R-CARBON:5.6KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | 4 | L903 | 2701-000158 INDUCTOR-AXIAL:22uH,10%,2.5x3.4mm | | ... | 4 | R609 | 2001-000780 R-CARBON:4700HM,5%,1/8W,AA,TP1.8X3.2MM | |

| Level | Loc. No. | Code No. | Description ; Specification | Remark |
|-------|----------|-------------|--|--------|
|4 | R610 | 2001-000435 | R-CARBON:1MOHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R611 | 2001-000812 | R-CARBON:5.6KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R612 | 2001-000780 | R-CARBON:470OHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R613 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R614 | 2001-000924 | R-CARBON:680OHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R615 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R616 | 2001-000938 | R-CARBON:680OHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R801 | 2003-001093 | R-METAL OXIDE(S):12Kohm,5%,2WAF,TP3.9x | |
|4 | R802 | 2003-001093 | R-METAL OXIDE(S):12Kohm,5%,2WAF,TP3.9x | |
|4 | R803 | 2003-001093 | R-METAL OXIDE(S):12Kohm,5%,2WAF,TP3.9x | |
|4 | R804 | 2003-002239 | R-METAL OXIDE(S):100KOHM,5%,2WAF,TP3.9 | |
|4 | R805 | 2003-002239 | R-METAL OXIDE(S):100KOHM,5%,2WAF,TP3.9 | |
|4 | R806 | 2001-000734 | R-CARBON:4.7KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R808 | 2009-000018 | R-METAL PLATE:0.22ohm,10%,5W,CL,TP5x14x | |
|4 | R809 | 2009-000018 | R-METAL PLATE:0.22ohm,10%,5W,CL,TP5x14x | |
|4 | R810 | 2001-001088 | R-CARBON(S):1KOHM,5%,1/2W,AA,TP2.4X6.4M | |
|4 | R811 | 2001-001144 | R-CARBON(S):4.7KOHM,5%,1/2W,AA,TP2.4X6.4 | |
|4 | R813 | 2001-000052 | R-CARBON(S):3.3KOHM,5%,1/2W,AA,TP2.4X6.4 | |
|4 | R814 | 2001-001410 | R-CARBON(S):430HM,5%,1/2W,AA,TP2.4X6.4M | |
|4 | R815 | 2003-001040 | R-METAL OXIDE(S):47Kohm,5%,2WAF,TP3.9x | |
|4 | R816 | 2001-001088 | R-CARBON(S):1KOHM,5%,1/2W,AA,TP2.4X6.4M | |
|4 | R817 | 2001-001088 | R-CARBON(S):1KOHM,5%,1/2W,AA,TP2.4X6.4M | |
|4 | R818 | 2004-004089 | R-METAL(S):123Kohm,1%,1/2W,AA,TP2.5x6.5 | |
|4 | R819 | 2001-001131 | R-CARBON(S):33KOHM,5%,1/2W,AA,TP2.4X6.4 | |
|4 | R820 | 2004-001983 | R-METAL(S):2.49Kohm,1%,1/2W,AA,TP2.4X6.4 | |
|4 | R823 | 2001-001077 | R-CARBON(S):150OHM,5%,1/2W,AA,TP2.4X6.4 | |
|4 | R826 | 2003-002037 | R-METAL OXIDE(S):270ohm,5%,2WAF,TP3.9x | |
|4 | R827 | 2008-000205 | R-FUSIBLE(S):10ohm,5%,1/2W,AF,TP2.5x6.5 | |
|4 | R828 | 2008-000206 | R-FUSIBLE(S):1ohm,5%,1/2W,AF,TP2.5x6.5m | |
|4 | R830 | 2003-001040 | R-METAL OXIDE(S):47Kohm,5%,2WAF,TP3.9x | |
|4 | R833 | 2001-000734 | R-CARBON:4.7KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R834 | 2003-001040 | R-METAL OXIDE(S):47Kohm,5%,2WAF,TP3.9x | |
|4 | R835 | 2003-001040 | R-METAL OXIDE(S):47Kohm,5%,2WAF,TP3.9x | |
|4 | R837 | 2001-001071 | R-CARBON(S):12KOHM,5%,1/2W,AA,TP2.4X6.4 | |
|4 | R901 | 2001-000290 | R-CARBON:10KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R902 | 2001-000563 | R-CARBON:27KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R903 | 2001-000290 | R-CARBON:10KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R904 | 2001-000786 | R-CARBON:47KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R905 | 2001-000290 | R-CARBON:10KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R906 | 2001-000290 | R-CARBON:10KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R907 | 2001-000290 | R-CARBON:10KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R908 | 2001-000290 | R-CARBON:10KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R909 | 2001-000290 | R-CARBON:10KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R910 | 2001-000281 | R-CARBON:100OHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R911 | 2001-000281 | R-CARBON:100OHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R912 | 2001-000281 | R-CARBON:100OHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R913 | 2001-000281 | R-CARBON:100OHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R914 | 2001-000281 | R-CARBON:100OHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R915 | 2001-000290 | R-CARBON:10KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R916 | 2001-000290 | R-CARBON:10KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R917 | 2001-000281 | R-CARBON:100OHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R918 | 2001-000290 | R-CARBON:10KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R919 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R920 | 2001-000290 | R-CARBON:10KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R921 | 2001-000281 | R-CARBON:100OHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R922 | 2001-000281 | R-CARBON:100OHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R923 | 2001-000281 | R-CARBON:100OHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R924 | 2001-000281 | R-CARBON:100OHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R925 | 2001-000281 | R-CARBON:100OHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R926 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R927 | 2001-000281 | R-CARBON:100OHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R928 | 2001-000290 | R-CARBON:10KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R929 | 2001-000281 | R-CARBON:100OHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R930 | 2001-000281 | R-CARBON:100OHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R931 | 2001-000290 | R-CARBON:10KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R932 | 2001-000281 | R-CARBON:100OHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R933 | 2001-000281 | R-CARBON:100OHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R934 | 2001-000281 | R-CARBON:100OHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R935 | 2001-000281 | R-CARBON:100OHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R936 | 2001-000290 | R-CARBON:10KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R937 | 2001-000281 | R-CARBON:100OHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R938 | 2001-000890 | R-CARBON:6.8KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R939 | 2001-000890 | R-CARBON:6.8KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R940 | 2001-000449 | R-CARBON:2.2KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R941 | 2001-000449 | R-CARBON:2.2KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R942 | 2001-000281 | R-CARBON:100OHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R943 | 2001-000281 | R-CARBON:100OHM,5%,1/8W,AA,TP1.8X3.2MM | |

| Level | Loc. No. | Code No. | Description ; Specification | Remark |
|-------|----------|-------------|--|--------|
|4 | R944 | 2001-000890 | R-CARBON:6.8KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R945 | 2001-000890 | R-CARBON:6.8KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R946 | 2001-000890 | R-CARBON:6.8KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R947 | 2001-000734 | R-CARBON:4.7KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R948 | 2001-000281 | R-CARBON:100OHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R949 | 2001-000290 | R-CARBON:10KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R950 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R951 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R952 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | RL01 | 2001-001178 | R-CARBON(S):680OHM,5%,1/2W,AA,TP2.4X6.4 | |
|4 | RX801S | 2002-001011 | R-COMPOSITION:3.3Mohm,5%,1/2W,AA,TP3.7x | |
|4 | RY801S | 2002-001012 | R-COMPOSITION:8.2Mohm,5%,1/2W,AA,TP3.7x | |
|4 | VX801S | 1405-000187 | VARISTOR:750V,1250A,12.5x7mm,TP | |
|4 | X901 | 2801-003433 | CRYSTAL-UNIT:12MHZ,30PPM,28-AAM,30PF,300 | |
|4 | | AA41-00828A | PCB-MAIN,-CEM-1,1LA,1.6T,330X245,1A | S.N.A |
|3 | | AA39-00184A | LEAD CONNECTOR-ASSY,1P:300MM,YFH800-01, | |
|3 | | AA65-30104C | CLAMPER CORE-WIRE:ALL MODEL,NYLON 66,V2, | S.N.A |
|3 | | AA65-30018A | CLAMPER CORE-WIRE:DONG-A,NYLON-66,-,-,-, | S.N.A |
|3 | | AA65-30009A | CLAMPER CORE-FBT,-ABS,VO,-,BLK,- | S.N.A |
|3 | | AA96-00475D | ASSY H/S-MBRF760C,KAT8R33,F10U180S,FML-G | |
|4 | CIS | 0402-000564 | DIODE-RECTIFIER:FML-G22S,200V,10A,TO-220 | |
|4 | CIS | AA62-00066B | HEAT SINK:D2,D3,AL,T1.0,89,70,-,AA62-00 | S.N.A |
|4 | CIS | 6003-000334 | SCREW-TAPTITE:RH,+,2S,M3,L6,ZPC(YEL),SWR | S.N.A |
|4 | CIS | 1203-001543 | IC-VOLTAGE REGULATOR:78R33,TO-220,4P,400 | |
|4 | CIS | 0402-001358 | DIODE-RECTIFIER:FPF10U60S,600V,10A,TO-2 | |
|4 | CIS | 0402-000233 | DIODE-RECTIFIER:FML-G12S,200V,5A,-,- | |
|4 | CIS | 0205-001027 | OIL-SILICON:G746,-,- | S.N.A |
|3 | | AA63-00643A | SHIELD-MUX,BOT:210TP,SPTE,TO.3 | S.N.A |
|3 | | AA63-00642A | SHIELD-MUX,TOP:210TP,SPTE,TO.3 | S.N.A |
|2 | | AA61-01283A | BRACKET-CHASSIS:150TP,SECC,T1.0 | |
|2 | | AA60-00161A | SPACER-BUMPON:210TP,PU,12.7,,BLK,5.8,12 | S.N.A |

ASSY CPT

| | | | | |
|-------|---|-------------|--|-------|
| 1 | * | AA91-06043A | ASSY CPT:SMO-150TPV | S.N.A |
|2 | | AA98-70014G | ASSY TBC WIRE(P):-,15inch,NTSC,1PKS2A/C | S.N.A |
|2 | | AA63-60028A | SPACER-DY,-,NEOPRENE,-,-,-,BLK,-,-,VO W1 | S.N.A |
|2 | | AA27-00161A | DEFLECTION YOKE:15DF,CDY-MT1501A,ST-3,A3 | |
|2 | | AA27-00077A | COIL DEGAUSSING:-,4.3mH,20%,70T,90HM,- | |
|2 | | AA27-00002A | MAGNET CONVERGENCE:-,JH291-SC-OB,29.1MM | |
|2 | | AA03-00146A | CRT COLOR:A36QDT351X,+380mG,2.5mH,22.5mH | |

ASSY COVER REAR

| | | | | |
|-------|---|-------------|---|-------|
| 1 | * | AA90-04541A | ASSY COVER REAR:150TP,MONITOR,,, | S.N.A |
|2 | | AA63-00650A | COVER-SCREW:150TPABS HB,IV16 | |
|2 | | AA64-03282A | CABINET-BACK:150TP,ABS HB,IV16 | |
|2 | | AA96-01389A | ASSY MISC P-SHIELD TOP:150TP,TT,,AL1050 | S.N.A |
|3 | | AA63-00645A | SHIELD-CRT,TOP:150TP,AL1050S,TO.3 | S.N.A |
|3 | | AA63-00648A | SHIELD-CRT,REAR:150TP,AL1050S,TO.3 | S.N.A |
|3 | | AA63-00652A | COVER-CAP:150TP,PPV,VO,WHIT,T1 | |

ASSY COVER FRONT

| | | | | |
|-------|--------|-------------|---|-------|
| 1 | * | AA90-04540A | ASSY COVER FRONT:150TP,MONITOR,,, | S.N.A |
|2 | B/CHA+ | 6003-000009 | SCREW-TAPTITE:BH,+,B,M4,L16,ZPC(YEL),SWR | S.N.A |
|2 | C/B+B/ | 6003-000009 | SCREW-TAPTITE:BH,+,B,M4,L16,ZPC(YEL),SWR | S.N.A |
|2 | C/B+B/ | 6003-000009 | SCREW-TAPTITE:BH,+,B,M4,L16,ZPC(YEL),SWR | S.N.A |
|2 | C/B+C/ | 6003-000009 | SCREW-TAPTITE:BH,+,B,M4,L16,ZPC(YEL),SWR | S.N.A |
|2 | CRT+C/ | AA60-10050R | SCREW-ASSY,-,SWRCHR18A,M5,L31.5,HH,+,WC,- | S.N.A |
|2 | P/CTRL | AA64-03287A | KNOB-ROTARY:210TPABS,HB,IV16 | |
|2 | P/CTRL | 6003-001019 | SCREW-TAPTITE:RH,+,B,M4,L12,ZPC(BLK),SWR | S.N.A |
|2 | P/F+C/ | 6003-001019 | SCREW-TAPTITE:RH,+,B,M4,L12,ZPC(BLK),SWR | S.N.A |
|2 | | AA96-01387A | ASSY COVER P-FRONT:150TP,TT,ABS,HB,IV1 | S.N.A |
|3 | C/F | AA63-00653A | EARTH-PLATE:150TP,PBS-1,TO.3 | |
|3 | EARTH+ | 6003-001019 | SCREW-TAPTITE:RH,+,B,M4,L12,ZPC(BLK),SWR | S.N.A |
|3 | SPK+C/ | 6003-001023 | SCREW-TAPTITE:RWH,+,B,M3,L10,ZPC(YEL),SW | S.N.A |
|3 | | AA96-01393A | ASSY SPEAKER P:8ohm,BT17M0,-,2W,350mm,- | S.N.A |

Electrical Parts List

| Level | Loc. No. | Code No. | Description ; Specification | Remark | Level | Loc. No. | Code No. | Description ; Specification | Remark |
|-------|----------|-------------|--|--------|-------|----------|----------|-----------------------------|--------|
| ... | 3 | AA65-00011C | CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2, | S.N.A | | | | | |
| ... | 3 | AA64-03281A | CABINET-FRONT;150TP,ABS HB,IV16 | | | | | | |
| ... | 2 | AA96-01388A | ASSY COVER P-PANEL FRONT;150TP,TT,ABS,H | S.N.A | | | | | |
| ... | 3 | AA65-30107A | CLAMPER CORE-D,COIL-20-22 INCH,NYLON 66, | S.N.A | | | | | |
| ... | 3 | K/C+P/ | 6003-001019 SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR | S.N.A | | | | | |
| ... | 3 | KNOPOV | AA61-60003J SPRING ETC-CS-;SUS304,-,-,OD6,N7,OD6,-, | S.N.A | | | | | |
| ... | 3 | W/RL+P | 6003-001019 SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR | S.N.A | | | | | |
| ... | 3 | AA64-03289A | WINDOW-RMC,LED;210TP,PC CLR | | | | | | |
| ... | 3 | AA64-03288A | DECORATION-ROTARY;210TP,ABS,HB,IV16,SVM3 | | | | | | |
| ... | 3 | AA64-03286A | KNOB-POWER;210TP,ABS,HB,IV16 | | | | | | |
| ... | 3 | AA64-03285A | KNOB-CONTROL;210TP,ABS,HB,IV16 | | | | | | |
| ... | 3 | AA64-03284A | PANEL-CONTROL;150TP,ABS HB,IV16 | | | | | | |

ASSY ACCESSORY

| | | | | |
|-----|---|-------------|--|-------|
| 1 | * | AA92-07491A | ASSY ACCESSORY;SMO-210TPV | |
| ... | 2 | AA39-00344A | CABLE FORM CONN.COAX;SMO-210TP,U12990#26 | |
| ... | 2 | AA39-00343A | CABLE FORM CONN.COAX;KS6A/SMO-210TP,U129 | |
| ... | 2 | BH39-10007A | CBF POWER CORD;DET,250V/6A,H05VV-F,LP-34 | |
| ... | 2 | AA69-00862A | BAG PE-;HDPE PE FOAM,T0.03,W400,H240,-, | S.N.A |
| ... | 2 | AA68-02690A | MANUAL USERS;SMO-210TP,EN,FR,SP,IT,GE,W/ | |
| ... | 2 | AA59-00299A | REMOCON;TM66,DIY,35,G6671B,S/S,L/GRAY | |

6-2 SM0-210TPV

| Level | Loc. No. | Code No. | Description ; Specification | Remark | Level | Loc. No. | Code No. | Description ; Specification | Remark |
|---------------------|----------|-------------|--|--------|-------|----------|-------------|--|--------|
| ASSY CHASSIS | | | | | | | | | |
| 1 | * | AA91-06045A | ASSY CHASSIS:SMO-210TPV | | ..2 | | AA94-12555A | ASSY PCB MAIN:SMO-210TPV/KS6A | S.N.A |
| ..2 | B/TER+ | 6003-001023 | SCREW-TAPTITE:RWH,+,B,M3,L10,ZPC(YEL),SW | S.N.A | ..3 | C801 | 2401-001426 | C-AL:470uF,20%,400V/GP,35x45mm,10 | |
| ..2 | B/TER+ | 6003-001023 | SCREW-TAPTITE:RWH,+,B,M3,L10,ZPC(YEL),SW | S.N.A | ..3 | C818 | 2401-003633 | C-AL:220UF,20%,160V/GP,ST,22X25MM,10 | |
| ..2 | P/M+B/ | 6003-001023 | SCREW-TAPTITE:RWH,+,B,M3,L10,ZPC(YEL),SW | S.N.A | ..3 | CN401 | AA60-40012D | PIN-GT,ASSY:T1.6,6-12.5,-,NYLON66 | S.N.A |
| ..2 | PCBMUX | AA60-00161A | SPACER-BUMPON:210TPPU,12.7,.,BLK,5.8,12 | S.N.A | ..3 | CN501A | AA39-20604A | LEAD CONNECTOR-ASSY:5/4P,300/200MM,YBNH | |
| ..2 | | AA65-30013A | CLAMPER CORE-WIRE-,NYLON-66,V0,-,NTR,DA | S.N.A | ..3 | CNT01 | 3710-001208 | CONNECTOR-SOCKET:32P,2R,2.54mm,STRAIGHT, | |
| ..2 | | AA96-01309A | ASSY MISC P-BRACKET TERMINAL:210TP,SECC, | S.N.A | ..3 | CNT01+ | AA96-01395A | ASSY PCB P:SMO-210TP/150TP/KS6A,TTSEC,8C | S.N.A |
| ..3 | | AA61-01268A | BRACKET-TERMINAL:210TP,SECC,T1.0 | S.N.A | ..3 | CNT02 | 3710-001208 | CONNECTOR-SOCKET:32P,2R,2.54mm,STRAIGHT, | |
| ..3 | | AA64-03290A | INLAY-BACK:210TPPS SHEET,T0.5 | S.N.A | ..3 | CR402S | 2306-000350 | C-FILM,MPPF:270NF,5%,400V,TP,26X18.5X10M | |
| ..2 | | AA94-12561A | ASSY PCB MISC-MASTER:SMO-210TPV/KS6A | S.N.A | ..3 | CR409S | 2306-000357 | C-FILM,MPPF:8.2nf,5%,1.6KV/BK,20x9.5x17. | |
| ..3 | B/M+M/ | 6001-000057 | SCREW-MACHINE:RH,+,M3,L6,ZPC(BLK),SWRCH1 | S.N.A | ..3 | CX801S | 2306-000318 | C-FILM,MPPF:220nf,20%,250V,TP,22.5mm | |
| ..3 | B/M+P/ | 6003-001023 | SCREW-TAPTITE:RWH,+,B,M3,L10,ZPC(YEL),SW | S.N.A | ..3 | CX802S | 2306-000318 | C-FILM,MPPF:220nf,20%,250V,TP,22.5mm | |
| ..3 | CN801 | AB39-30601H | LEAD CONNECTOR:YFH800-150,S,3P,300mm,161 | S.N.A | ..3 | CY801S | 2201-000446 | C-CERAMIC,DISC:3.3NF,20%,400V/Y5U,TP,15X | |
| ..3 | SW801S | 3403-001130 | SWITCH-PUSH:250VAC,5A,SPST,OFF-ON-OFF,- | S.N.A | ..3 | D404 | 0402-001296 | DIODE-RECTIFIER:MP-3FU,1.5KV,5A,TO-3PF, | |
| ..3 | | AA97-13773C | ASSY AUTO:SMO-210TPV/KS6A | S.N.A | ..3 | D801S | AA96-00276A | ASSY H/S:-,BRIDGE,AA62-00052A,RBV606,WAS | S.N.A |
| ..4 | EY81 | 6042-000002 | EYELET:ID1.5,OD2,L3.1,SN,BSS3-E/EH | S.N.A | ..4 | | AA62-00052A | HEAT SINK-PS,-,.,SILVER,HOLE 18.5mm, 2 | S.N.A |
| ..4 | EY82 | 6042-000002 | EYELET:ID1.5,OD2,L3.1,SN,BSS3-E/EH | S.N.A | ..4 | | AA60-30003A | WASHER:T1.5,SBHG-1 | S.N.A |
| ..4 | GT801 | AA60-40014A | PIN-GT,ASSY:AUTO | S.N.A | ..4 | | 6003-000335 | SCREW-TAPTITE:RH,+,2S,M3,L8,ZPC(YEL),SWR | S.N.A |
| ..4 | GT802 | AA60-40014A | PIN-GT,ASSY:AUTO | S.N.A | ..4 | | 0402-000549 | DIODE-BRIDGE:RBV606,600V,6A,-,BK | S.N.A |
| ..4 | GT803 | AA60-40014A | PIN-GT,ASSY:AUTO | S.N.A | ..4 | | 0205-000129 | GREASE-SILICON:SC102,JAPAN | S.N.A |
| ..4 | GT804 | AA60-40014A | PIN-GT,ASSY:AUTO | S.N.A | ..4 | D803 | 0402-000250 | DIODE-RECTIFIER:RG4C,1000V,1A,- | |
| ..4 | GT805 | AA60-40014A | PIN-GT,ASSY:AUTO | S.N.A | ..3 | D814 | 0402-000586 | DIODE-RECTIFIER:RK49,90V,3.5A,DO-201AD | |
| ..4 | GT806 | AA60-40014A | PIN-GT,ASSY:AUTO | S.N.A | ..3 | FP801S | 3601-001007 | FUSE-CARTRIDGE:250V,6.3A,TIME-LAG,GLASS, | |
| ..4 | | AA41-00832A | PCB-MASTER:SM5-210TPCEM-1,1LA,1.6T,245 | S.N.A | ..3 | GT201+ | AA39-00184B | LEAD CONNECTOR:KS6A/SMO-210TPUL1617#22, | |
| ..3 | | 3301-001201 | CORE-FERRITE:AE,21x11x32mm,1500,280G | S.N.A | ..3 | IC201S | AA09-00370A | IC MICOM:TDA9380PS/N2/I,SMO-210TP,64P,3. | |
| ..3 | | AA61-00530B | BRACKET-MASTER:25M6,29M6,SECC | S.N.A | ..3 | IC202 | 0904-001121 | IC-I/O SUPPORT CHIP:8574,8BIT,DIP,16P,30 | |
| ..3 | | AA39-00340A | LEAD CONNECTOR:KS6A/SMO-210TP,UL1617#22, | S.N.A | ..3 | IC203 | 0904-001121 | IC-I/O SUPPORT CHIP:8574,8BIT,DIP,16P,30 | |
| ..2 | | AA94-12560A | ASSY PCB MISC-REAR:SMO-210TPV/KS6A | S.N.A | ..3 | IC301 | AA96-00244K | ASSY H/S:-,POWER,AA62-00046A,CS21K3N | S.N.A |
| ..3 | CN701 | 3711-002707 | CONNECTOR-HEADER:NOWALL,9P,1R,2.5mm,ANGL | S.N.A | ..4 | CIS | 0205-001027 | OIL-SILICON:G746,-,- | S.N.A |
| ..3 | CN702 | 3711-002707 | CONNECTOR-HEADER:NOWALL,9P,1R,2.5mm,ANGL | S.N.A | ..4 | CIS | 1204-000517 | IC-VERTICAL DEF:LA7845,SIP,7P,-,PLASTIC | |
| ..3 | JACK10 | 3705-001186 | CONNECTOR-COAXIAL-BNC,FEMALE,10MOHM,75OH | S.N.A | ..4 | CIS | 6003-000335 | SCREW-TAPTITE:RH,+,2S,M3,L8,ZPC(YEL),SWR | S.N.A |
| ..3 | JACK10 | 3705-001186 | CONNECTOR-COAXIAL-BNC,FEMALE,10MOHM,75OH | S.N.A | ..4 | CIS | AA62-00046A | HEAT SINK-PS,-,T1.0,-,D1(DREAM) 60X25X | S.N.A |
| ..3 | JACK10 | 3705-001186 | CONNECTOR-COAXIAL-BNC,FEMALE,10MOHM,75OH | S.N.A | ..3 | IC501 | AA96-50311A | ASSY H/S:-,VIDEO,AA62-30175D,TDA6107Q,- | S.N.A |
| ..3 | JACK10 | 3705-001186 | CONNECTOR-COAXIAL-BNC,FEMALE,10MOHM,75OH | S.N.A | ..4 | | 1201-001159 | IC-VIDEO AMP:6107,ZSIP9P,-,SINGLE,-,PLA | |
| ..3 | JACK10 | 3705-001186 | CONNECTOR-COAXIAL-BNC,FEMALE,10MOHM,75OH | S.N.A | ..4 | | 6003-000334 | SCREW-TAPTITE:RH,+,2S,M3,L6,ZPC(YEL),SWR | S.N.A |
| ..3 | JACK11 | 3705-001186 | CONNECTOR-COAXIAL-BNC,FEMALE,10MOHM,75OH | S.N.A | ..4 | | AA62-30175D | HEAT SINK-PS:-,SECC,T1.0,-,33X15X30 FT-2 | S.N.A |
| ..3 | JACK11 | 3705-001186 | CONNECTOR-COAXIAL-BNC,FEMALE,10MOHM,75OH | S.N.A | ..3 | IC601 | 1201-001200 | IC-POWER AMP:7267,DIP8P,346MIL,SINGLE,3 | |
| ..3 | JACK11 | 3705-001186 | CONNECTOR-COAXIAL-BNC,FEMALE,10MOHM,75OH | S.N.A | ..3 | IC602 | 0801-000961 | IC-CMOS LOGIC:4053,MULTIPLEXER,DIP,16P,30 | |
| ..3 | | AA63-00644A | SHIELD-JACK:210TP,SPT,TO.3 | S.N.A | ..3 | IC801S | AA96-50364C | ASSY H/S:-,POWER,AA62-30181A,STR-F6656,- | S.N.A |
| ..3 | | AA97-13773B | ASSY AUTO:SMO-210TPV/KS6A | S.N.A | ..4 | | 0205-000129 | GREASE-SILICON:SC102,JAPAN | S.N.A |
| ..4 | | AA41-00831A | PCB-REAR BNC:SM5-210TPCEM-1,1LA,1.6T,2 | S.N.A | ..4 | | 6003-000333 | SCREW-TAPTITE:RH,+,2S,M3,L10,ZPC(YEL),SW | S.N.A |
| ..2 | | AA94-12558A | ASSY PCB MISC-CONTROL:SMO-210TPV/KS6A | S.N.A | ..4 | | AA13-00018A | IC HYBRID:-,STR-F6656,LF1351,SPIN,-,- | S.N.A |
| ..3 | CNC901 | AA39-20112A | LEAD CONNECTOR-ASSY:9P,400,YBNH025-09,6 | S.N.A | ..4 | | AA62-30181A | HEAT SINK-ES:AA6063,EXTR,SILVER,WHT,ANOD, | S.N.A |
| ..3 | CNC902 | AA39-20070C | LEAD CONNECTOR-ASSY:7P,400,YBNH025-07,6 | S.N.A | ..4 | | AA96-00245A | ASSY H/S:-,AA62-00055A,KAT632,- | S.N.A |
| ..3 | RM01 | AA32-00012A | MODULE REMOCON:ORC-50HF2,38KHZ,940NM,MES | S.N.A | ..4 | | 1203-001939 | IC-POSIFIXED REG:-,7632,SIP,10P,-,PLASTI | |
| ..3 | ROT01 | 3406-001083 | SWITCH-ROTARY:DC16V,10MA,-,7MM | S.N.A | ..4 | | 6003-000334 | SCREW-TAPTITE:RH,+,2S,M3,L6,ZPC(YEL),SWR | S.N.A |
| ..3 | | 3301-001201 | CORE-FERRITE:AE,21x11x32mm,1500,280G | S.N.A | ..4 | | AA62-00055A | HEAT SINK-PS:-,T1.0,-,35*15*25D1,-,- | S.N.A |
| ..3 | | 3003-001066 | MIC-CONDENSOR:10V,0.3MA,-,40DB,2.2KOHM | S.N.A | ..3 | IC805 | BP96-00020L | ASSY HEAT SINK P-H/S TR,SCREVV,SI-8050,OI | |
| ..3 | | AA97-13773D | ASSY AUTO:SMO-210TPV/KS6A | S.N.A | ..4 | CIS | 0205-001027 | OIL-SILICON:G746,-,- | S.N.A |
| ..4 | CC01 | 2401-002165 | C-AL:100uF,20%,16V/GP,TP,6.3x7.5 | S.N.A | ..4 | CIS | 1203-002744 | IC-SWITCH REG:-,SI-8050S,TO-220,5P,10X16. | |
| ..4 | DC01 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200mA,DO-35, | S.N.A | ..4 | CIS | 6003-000335 | SCREW-TAPTITE:RH,+,2S,M3,L8,ZPC(YEL),SWR | S.N.A |
| ..4 | DC02 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200mA,DO-35, | S.N.A | ..4 | CIS | AA62-00045B | HEAT SINK-COMMANDO,AL1050,T1.0,H45.0 | S.N.A |
| ..4 | LD01 | 0601-000465 | LED-ROUND,GRN,5mm,565 | S.N.A | ..4 | CIS | BP96-00020M | ASSY HEAT SINK P-H/S TR,SCREVV,FQPF85N06,- | S.N.A |
| ..4 | RC01 | 2001-000790 | R-CARBON:47OHM,5%,1/2W,AA,TP,3.3X9MM | S.N.A | ..4 | CIS | 0205-001027 | OIL-SILICON:G746,-,- | S.N.A |
| ..4 | SW01 | 3404-000176 | SWITCH-TACT:12V,50mA,120gf,6x6mm,SPST | S.N.A | ..4 | CIS | 0505-001655 | FET-SILICON:FQPF85N06,N,60,53A,0.010OHM, | |
| ..4 | SW02 | 3404-000176 | SWITCH-TACT:12V,50mA,120gf,6x6mm,SPST | S.N.A | ..4 | CIS | 6003-000335 | SCREW-TAPTITE:RH,+,2S,M3,L8,ZPC(YEL),SWR | S.N.A |
| ..4 | SW03 | 3404-000176 | SWITCH-TACT:12V,50mA,120gf,6x6mm,SPST | S.N.A | ..4 | CIS | AA62-00045A | HEAT SINK-PS:-,T1.0,-,DREAM,-,-,-,- | S.N.A |
| ..4 | SW04 | 3404-000176 | SWITCH-TACT:12V,50mA,120gf,6x6mm,SPST | S.N.A | ..3 | IC902 | 1103-001209 | IC-EEPROM:AT24C04-PC27,C,512Kx8BIT,DIP,8 | |
| ..4 | SW05 | 3404-000176 | SWITCH-TACT:12V,50mA,120gf,6x6mm,SPST | S.N.A | ..3 | L405 | AA27-00159A | COIL HORIZ. WIDTH:140UH,140UH,YL-81 DR 1 | |
| ..4 | SW06 | 3404-000176 | SWITCH-TACT:12V,50mA,120gf,6x6mm,SPST | S.N.A | ..3 | L607 | 3301-001456 | CORE-FERRITE:AE,15X 7X 18MM,-,- | |
| ..4 | SW07 | 3404-000176 | SWITCH-TACT:12V,50mA,120gf,6x6mm,SPST | S.N.A | ..3 | L807 | AA27-00098A | COIL CHOKE:-,24uH,10%,0.1,3.0A,DR10X | |
| ..4 | SW08 | 3404-000176 | SWITCH-TACT:12V,50mA,120gf,6x6mm,SPST | S.N.A | ..3 | L813 | AA27-10004E | COIL CHOKE:-,40uH,10%,0.1,3.0A,DR10X | |
| ..4 | SW09 | 3404-000176 | SWITCH-TACT:12V,50mA,120gf,6x6mm,SPST | S.N.A | ..3 | LR401S | AA27-00160A | COIL LINEARITY:64UH,64UH,L-81 OWA 12X15, | |
| ..4 | SW10 | 3404-000176 | SWITCH-TACT:12V,50mA,120gf,6x6mm,SPST | S.N.A | ..3 | LX801S | AA29-00011A | FILTER LINE NOISE:C32W8,-,0.20MAX,1.5KV | |
| ..4 | SW11 | 3404-000176 | SWITCH-TACT:12V,50mA,120gf,6x6mm,SPST | S.N.A | ..3 | PC801S | 0604-001032 | PHOTO-COUPLER:TR,170-260%,300mW,DIP,4,ST | |
| ..4 | SW12 | 3404-000176 | SWITCH-TACT:12V,50mA,120gf,6x6mm,SPST | S.N.A | ..3 | PFC01 | AA27-00116A | COIL CHOKE:CODE_NO,-,35mH,-0,+5%,2.80 | |
| ..4 | SW13 | 3404-000176 | SWITCH-TACT:12V,50mA,120gf,6x6mm,SPST | S.N.A | ..3 | PT801S | 1404-001026 | THERMISTOR-PTC:70hm,20%,290V,25A,-,ST | |
| ..4 | | AA41-00829A | PCB-CONTROL:SM5-210TPCEM-1,1LA,1.6T,24 | S.N.A | ..3 | Q401 | AA96-00624A | ASSY H/S:-,POWER,AA62-00057A,KSD5703,WAS | S.N.A |
| | | | | | ..4 | | AA62-00057A | HEAT SINK-PS:-,T1.0,-,41*20*60,D2,-,- | S.N.A |
| | | | | | ..4 | | AA60-30001A | WASHER-PLATE:M3,ID3.5,15X8.5,T1.0,SBHG | S.N.A |
| | | | | | ..4 | | 6003-000333 | SCREW-TAPTITE:RH,+,2S,M3,L10,ZPC(YEL),SW | S.N.A |
| | | | | | ..4 | | 0502-001136 | TR-POWER:KSD5703,NPN,70W,TO-3PF,ST,8- | |

Electrical Parts List

| Level | Loc. No. | Code No. | Description ; Specification | Remark | Level | Loc. No. | Code No. | Description ; Specification | Remark |
|-------|----------|-------------|---|--------|-------|----------|-------------|--|--------|
| ... | ... | 0205-000129 | GREASE-SILICON:SC102,JAPAN | S.N.A | ... | C609 | 2301-000192 | C-FILM,PEF:1nf,5%,50V,TP,5.3x10mm,5mm | |
| △ | T401 | AA26-50001R | TRANS-HORIZ.DRIVE:-,,-,80MH,-,,-,520UH,- | | ... | C610 | 2401-000444 | C-AL:10uf,20%,25V/GP,TP,5x5mm,5mm | |
| △ | T444S | AA26-00057A | TRANS.FBT,-,FUH-29A001B(S),25/29,130 | | ... | C611 | 2401-000620 | C-AL:2.2uf,10%,50V/GP,TP,5x11,5 | |
| △ | T801S | AA26-00188A | TRANS.SWITCHING:49B125,DIY,90-264V,PL5,P | | ... | C612 | 2401-002619 | C-AL:47uf,20%,25V/GP,TP,5x11,5 | |
| △ | V999S | 3704-001105 | SOCKET-CRT:11P,20PI,26.5PI,NL,- | | ... | C701 | 2202-000121 | C-CERAMIC,MLC-AXIAL:100pf,10%,50V,Y5P,TP | |
| ... | ... | AA65-30018A | CLAMPER CORE-WIRE:DONG-A,NYLON-66,-,-,- | S.N.A | ... | C702 | 2202-000121 | C-CERAMIC,MLC-AXIAL:100pf,10%,50V,Y5P,TP | |
| ... | ... | AA63-00643A | SHIELD-MUX,BOT:210TPSPTE,T0.3 | S.N.A | ... | C703 | 2202-000121 | C-CERAMIC,MLC-AXIAL:100pf,10%,50V,Y5P,TP | |
| ... | ... | AA63-00642A | SHIELD-MUX,TOP:210TPSPTE,T0.3 | S.N.A | ... | C704 | 2202-000121 | C-CERAMIC,MLC-AXIAL:100pf,10%,50V,Y5P,TP | |
| ... | ... | AA39-20501E | LEAD CONNECTOR-ASSY:3(2)P500MM,67096-0 | | ... | C705 | 2202-000121 | C-CERAMIC,MLC-AXIAL:100pf,10%,50V,Y5P,TP | |
| ... | ... | AA96-00475D | ASSY H/S:MRF760C,KA78R33,F10U180S,FML-G | | ... | C706 | 2202-000121 | C-CERAMIC,MLC-AXIAL:100pf,10%,50V,Y5P,TP | |
| ... | CIS | 0402-000564 | DIODE-RECTIFIER:FML-G22S,200V,10A,TO-220 | | ... | C707 | 2202-000121 | C-CERAMIC,MLC-AXIAL:100pf,10%,50V,Y5P,TP | |
| ... | CIS | AA62-00066B | HEAT SINK:D2,D3,AL,T1.0,89,70,-,AA62-00 | S.N.A | ... | C708 | 2202-000121 | C-CERAMIC,MLC-AXIAL:100pf,10%,50V,Y5P,TP | |
| ... | CIS | 6003-000334 | SCREW-TAPTITE:RH,-,2S,M3,L6,ZPC(YEL),SWR | S.N.A | ... | C802 | 2301-001065 | C-FILM,MPPF:47nf,5%,630V,TP,19x15.5x7,7 | |
| ... | CIS | 1203-001543 | IC-VOLTAGE REGULATOR:78R33,TO-220,4P,400 | | ... | C803 | 2301-001342 | C-FILM,PPF:1.5nf,5%,800V,TP,15x6.5x11.5m | |
| ... | CIS | 0402-001358 | DIODE-RECTIFIER:FFP:10U60S,600V,10A,TO-2 | | ... | C804 | 2201-000281 | C-CERAMIC,DISC:1NF,+80-20%,50V,Y5V,TP,5X | |
| ... | CIS | 0402-000233 | DIODE-RECTIFIER:FML-G12S,200V,5A,-,- | | ... | C805 | 2202-000561 | C-CERAMIC,MLC-RADIAL:0.68NF,5%,50V,COG,T | |
| ... | CIS | 0205-001027 | OIL-SILICON:G746,-,- | S.N.A | ... | C806 | 2401-000360 | C-AL:100uf,20%,50V/GP,TP,8x11,5,5 | |
| ... | ... | AA39-00184A | LEAD CONNECTOR-ASSY:1P,300MM,YFH800-01, | | ... | C808 | 2201-000991 | C-CERAMIC,DISC:0.56NF,10%,2KV,Y5P,TP,7.5 | |
| ... | ... | AA97-13691Z | ASSY AUTO:DW21G5VD,VC1A | | ... | C809 | 2401-001998 | C-AL:1000uf,20%,25V/GP,TP,10x20,5mm | |
| ... | C201 | 2202-002037 | C-CERAMIC,MLC-AXIAL:100nf,80-20%,50V,Y5V | | ... | C810 | 2201-000991 | C-CERAMIC,DISC:0.56NF,10%,2KV,Y5P,TP,7.5 | |
| ... | C203 | 2401-000480 | C-AL:10uf,20%,50V/GP,TP,5x11,5 | | ... | C811 | 2401-000703 | C-AL:2200uf,20%,25V/GP,-,12.5x25mm, | |
| ... | C205 | 2202-000849 | C-CERAMIC,MLC-AXIAL:0.018NF,5%,50V,COG,T | | ... | C812 | 2201-000991 | C-CERAMIC,DISC:0.56NF,10%,2KV,Y5P,TP,7.5 | |
| ... | C206 | 2401-000444 | C-AL:10uf,20%,25V/GP,TP,5x5mm,5mm | | ... | C813 | 2401-003141 | C-AL:2200uf,20%,25V/WT,TP,13x25,5mm | |
| ... | C207 | 2305-000665 | C-FILM,MPEF:100nf,5%,63V,TP,7.5x4.0x5.0m | | ... | C814 | 2301-000224 | C-FILM,PPF:22nf,5%,50V,TP,7.4x3.9x13mm,5 | |
| ... | C208 | 2305-000665 | C-FILM,MPEF:100nf,5%,63V,TP,7.5x4.0x5.0m | | ... | C815 | 2201-000375 | C-CERAMIC,DISC:0.22NF,5%,50V,RH,TP,12.5X | |
| ... | C209 | 2401-002009 | C-AL:100uf,20%,16V/GP,TP,6.3x7,5 | | ... | C816 | 2401-000262 | C-AL:100uf,20%,160V/HR,TP,16x25,7.5 | |
| ... | C210 | 2305-000665 | C-FILM,MPEF:100nf,5%,63V,TP,7.5x4.0x5.0m | | ... | C817 | 2201-000991 | C-CERAMIC,DISC:0.56NF,10%,2KV,Y5P,TP,7.5 | |
| ... | C211 | 2202-000632 | C-CERAMIC,MLC-AXIAL:100nf,20%,50V,Z5U,TP | | ... | C819 | 2401-000703 | C-AL:2200uf,20%,25V/GP,-,12.5x25mm, | |
| ... | C216 | 2305-000289 | C-FILM,MPEF:220nf,5%,63V,TP,-,5mm | | ... | C820 | 2305-000665 | C-FILM,MPEF:100nf,5%,63V,TP,7.5x4.0x5.0m | |
| ... | C217 | 2301-000342 | C-FILM,PEF:2.2nf,5%,50V,TP,7.4x3.9x13mm, | | ... | C821 | 2305-000665 | C-FILM,MPEF:100nf,5%,63V,TP,7.5x4.0x5.0m | |
| ... | C218 | 2305-000665 | C-FILM,MPEF:100nf,5%,63V,TP,7.5x4.0x5.0m | | ... | C822 | 2401-000703 | C-AL:2200uf,20%,25V/GP,-,12.5x25mm, | |
| ... | C219 | 2401-000603 | C-AL:1uf,20%,50V/GP,TP,5x11,5 | | ... | C823 | 2201-000315 | C-CERAMIC,DISC:2.2NF,+80-20%,250V,Y5U,TP | |
| ... | C220 | 2401-000426 | C-AL:10uf,20%,16V/GP,TP,3.5x5,5 | | ... | C824 | 2201-000315 | C-CERAMIC,DISC:2.2NF,+80-20%,250V,Y5U,TP | |
| ... | C221 | 2401-000660 | C-AL:2.2uf,20%,50V/GP,TP,5x11,5 | | ... | C825 | 2401-003028 | C-AL:100uf,20%,25V/WT,TP,6.3x11,5 | |
| ... | C222 | 2401-000215 | C-AL:0.1uf,20%,50V/GP,TP,4X7MM,5 | | ... | C826 | 2401-003028 | C-AL:100uf,20%,25V/WT,TP,6.3x11,5 | |
| ... | C223 | 2202-000796 | C-CERAMIC,MLC-AXIAL:1NF,10%,50V,Y5P,TP,3 | | ... | C827 | 2401-000040 | C-AL:47uf,20%,250V/WT,TP,16x25mm,7. | |
| ... | C224 | 2202-000796 | C-CERAMIC,MLC-AXIAL:1NF,10%,50V,Y5P,TP,3 | | ... | C828 | 2401-000302 | C-AL:100uf,20%,25V/GP,TP,6.3x11,5 | |
| ... | C225 | 2309-000138 | C-FILM,PE-PPF:100nf,5%,50V,TP,20x16x8,5, | | ... | C829 | 2401-000302 | C-AL:100uf,20%,25V/GP,TP,6.3x11,5 | |
| ... | C226 | 2202-000829 | C-CERAMIC,MLC-AXIAL:0.82NF,10%,50V,Y5P,TP | | ... | C830 | 2305-000665 | C-FILM,MPEF:100nf,5%,63V,TP,7.5x4.0x5.0m | |
| ... | C227 | 2301-000445 | C-FILM,PEF:4.7nf,5%,50V,TP,5.5x7x3mm,5mm | | ... | C833 | 2401-000481 | C-AL:10uf,20%,50V/WT,TP,5x11,5 | |
| ... | C228 | 2401-002075 | C-AL:4.7uf,20%,50V/GP,TP,5x11,5 | | ... | C834 | 2401-000173 | C-AL:1000uf,20%,35V/GP,TP,13x25,5 | |
| ... | C229 | 2401-002009 | C-AL:100uf,20%,16V/GP,TP,6.3x7,5 | | ... | C835 | 2201-000551 | C-CERAMIC,DISC:0.47NF,10%,1KV,Y5P,TP,6.3 | |
| ... | C230 | 2305-000665 | C-FILM,MPEF:100nf,5%,63V,TP,7.5x4.0x5.0m | | ... | C836 | 2401-002289 | C-AL:470uf,20%,35V/WT,TP,10x20,5 | |
| ... | C231 | 2401-000426 | C-AL:10uf,20%,16V/GP,TP,3.5x5,5 | | ... | C837 | 2401-000689 | C-AL:2200uf,20%,16V/GP,TP,13x25,5 | |
| ... | C233 | 2305-000289 | C-FILM,MPEF:220nf,5%,63V,TP,-,5mm | | ... | C842 | 2201-000551 | C-CERAMIC,DISC:0.47NF,10%,1KV,Y5P,TP,6.3 | |
| ... | C234 | 2305-000289 | C-FILM,MPEF:220nf,5%,63V,TP,-,5mm | | ... | C901 | 2401-001537 | C-AL:47uf,20%,25V/GP,TP,6.3x7mm,5mm | |
| ... | C248 | 2301-000445 | C-FILM,PEF:4.7nf,5%,50V,TP,5.5x7x3mm,5mm | | ... | C902 | 2401-002144 | C-AL:47uf,20%,16V/GP,TP,5x11,5 | |
| ... | C301 | 2305-000285 | C-FILM,MPEF:220NF,5%,100V,TP,10.5X5.5X15 | | ... | C903 | 2401-002009 | C-AL:100uf,20%,16V/GP,TP,6.3x7,5 | |
| ... | C302 | 2201-000259 | C-CERAMIC,DISC:0.18NF,10%,500V,Y5P,TP,5 | | ... | C904 | 2401-000480 | C-AL:10uf,20%,50V/GP,TP,5x11,5 | |
| ... | C303 | 2201-000556 | C-CERAMIC,DISC:0.47NF,10%,500V,Y5P,TP,5 | | ... | C905 | 2401-001537 | C-AL:47uf,20%,25V/GP,TP,6.3x7mm,5mm | |
| ... | C304 | 2401-002288 | C-AL:470uf,20%,25V/WT,TP,10x20,5 | | ... | C906 | 2301-000402 | C-FILM,PEF:1nf,5%,50V,TP,5x7x2.8mm,5mm | |
| ... | C305 | 2201-000556 | C-CERAMIC,DISC:0.47NF,10%,500V,Y5P,TP,5 | | ... | C907 | 2201-000119 | C-CERAMIC,DISC:100NF,+80-20%,50V,Y5V,TP | |
| ... | C306 | 2401-002288 | C-AL:470uf,20%,25V/WT,TP,10x20,5 | | ... | C908 | 2201-000573 | C-CERAMIC,DISC:0.047NF,5%,50V,COG,TP,5X3 | |
| ... | C307 | 2401-000365 | C-AL:100uf,20%,50V/WT,TP,10x12.5mm, | | ... | C909 | 2201-000573 | C-CERAMIC,DISC:0.047NF,5%,50V,COG,TP,5X3 | |
| ... | C308 | 2401-000365 | C-AL:100uf,20%,50V/WT,TP,10x12.5mm, | | ... | C910 | 2401-002009 | C-AL:100uf,20%,16V/GP,TP,6.3x7,5 | |
| ... | C309 | 2301-000254 | C-FILM,PEF:39nf,5%,50V,TP,7.5x3.5x6.5mm, | | ... | C911 | 2202-000796 | C-CERAMIC,MLC-AXIAL:1NF,10%,50V,Y5P,TP,3 | |
| ... | C312 | 2305-000149 | C-FILM,MPEF:100nf,5%,100V,TP,12x12.5x6.5 | | ... | C912 | 2202-000796 | C-CERAMIC,MLC-AXIAL:1NF,10%,50V,Y5P,TP,3 | |
| ... | C402 | 2201-000132 | C-CERAMIC,DISC:0.1NF,10%,500V,Y5P,TP,6.5 | | ... | C913 | 2305-000665 | C-FILM,MPEF:100nf,5%,63V,TP,7.5x4.0x5.0m | |
| ... | C403 | 2401-002267 | C-AL:2.2uf,20%,250V/GP,TP,8x11,5,5 | | ... | C916 | 2305-000665 | C-FILM,MPEF:100nf,5%,63V,TP,7.5x4.0x5.0m | |
| ... | C406 | 2401-000302 | C-AL:100uf,20%,25V/GP,TP,6.3x11,5 | | ... | C920 | 2305-000665 | C-FILM,MPEF:100nf,5%,63V,TP,7.5x4.0x5.0m | |
| ... | C407 | 2301-000383 | C-FILM,PEF:10nf,5%,50V,TP,6x7x3.2mm,5mm | | ... | CN601 | 3711-002642 | CONNECTOR-HEADER:BOX,3P,1R,2.5mm,STRAIGH | |
| ... | C408 | 2201-000599 | C-CERAMIC,DISC:0.56NF,10%,500V,Y5P,TP,5 | | ... | CN901 | 3711-002648 | CONNECTOR-HEADER:BOX,9P,1R,2.5mm,STRAIGH | |
| ... | C420 | 2301-001065 | C-FILM,MPPF:47nf,5%,630V,TP,19x15.5x7,7 | | ... | CN902 | 3711-002646 | CONNECTOR-HEADER:BOX,7P,1R,2.5mm,STRAIGH | |
| ... | C504 | 2301-000213 | C-FILM,PEF:220nf,5%,250V,TP,21.5x11,7,5 | | △ | CR404S | 2201-000639 | C-CERAMIC,DISC:0.68NF,10%,2KV,Y5P,TP,9X5 | |
| ... | C505 | 2202-000825 | C-CERAMIC,MLC-AXIAL:680pf,10%,50V,Y5P,TP | | △ | CR405S | 2305-000382 | C-FILM,MPEF:4.7nf,5%,400V,TP,-,5mm | |
| ... | C506 | 2401-001872 | C-AL:10uf,20%,250V/WT,TP,10x16,5 | | ... | ... | 2301-001258 | C-FILM,PPF:39nf,5%,400V,TP,19.5x9x15,7,5 | |
| ... | C507 | 2401-001232 | C-AL:4.7uf,20%,250V/GP,TP,10x12,5,5 | | ... | CS901 | 2202-000796 | C-CERAMIC,MLC-AXIAL:1NF,10%,50V,Y5P,TP,3 | |
| ... | C508 | 2201-000723 | C-CERAMIC,DISC:4.7NF,20%,3KV,Y5U,TP,16X5 | | ... | CS902 | 2202-000796 | C-CERAMIC,MLC-AXIAL:1NF,10%,50V,Y5P,TP,3 | |
| ... | C601 | 2401-000703 | C-AL:2200uf,20%,25V/GP,-,12.5x25mm, | | ... | CS903 | 2202-000796 | C-CERAMIC,MLC-AXIAL:1NF,10%,50V,Y5P,TP,3 | |
| ... | C602 | 2401-001397 | C-AL:470uf,20%,25V/GP,TP,10x16,5 | | ... | CS904 | 2202-000796 | C-CERAMIC,MLC-AXIAL:1NF,10%,50V,Y5P,TP,3 | |
| ... | C603 | 2401-002619 | C-AL:47uf,20%,25V/GP,TP,5x11,5 | | ... | D201 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200mA,DO-35, | |
| ... | C604 | 2301-000224 | C-FILM,PEF:22nf,5%,50V,TP,7.4x3.9x13mm,5 | | ... | D301 | 0402-000534 | DIODE-RECTIFIER:RG10V,400V,1.2A,DO-201,T | |
| ... | C605 | 2401-000444 | C-AL:10uf,20%,25V/GP,TP,5x5mm,5mm | | ... | D302 | 0402-000540 | DIODE-RECTIFIER:RU20A,600V,1.5A,-,TP | |
| ... | C606 | 2301-000192 | C-FILM,PEF:1nf,5%,50V,TP,5.3x10mm,5mm | | ... | D303 | 0402-000132 | DIODE-RECTIFIER:1N4004,400V,1A,DO-41,TP | |
| ... | C607 | 2401-000444 | C-AL:10uf,20%,25V/GP,TP,5x5mm,5mm | | ... | D304 | 0402-000546 | DIODE-RECTIFIER:TVR10G,400V,1.0A,DO-41,T | |
| ... | C608 | 2401-000603 | C-AL:1uf,20%,50V/GP,TP,5x11,5 | △ | ... | D401 | 0402-000493 | DIODE-RECTIFIER:1R5GU41,400V,1.5A,DO-15L | |

| Level | Loc. No. | Code No. | Description ; Specification | Remark | Level | Loc. No. | Code No. | Description ; Specification | Remark |
|-------|----------|----------|--|--------|-------|----------|----------|--|--------|
| ... | 4 | EY832 | 6042-000002 EYELET:ID1.5,OD2,L3.1,SN,BSS3-E/EH | S.N.A | ... | 4 | L809 | 3301-000287 CORE-FERRITE BEAD:AA,3.5x1.0x6.0mm,1500, | |
| ... | 4 | EY833 | 6042-000002 EYELET:ID1.5,OD2,L3.1,SN,BSS3-E/EH | S.N.A | ... | 4 | L810 | 3301-000287 CORE-FERRITE BEAD:AA,3.5x1.0x6.0mm,1500, | |
| ... | 4 | EY834 | 6042-000002 EYELET:ID1.5,OD2,L3.1,SN,BSS3-E/EH | S.N.A | ... | 4 | L812 | 3301-000287 CORE-FERRITE BEAD:AA,3.5x1.0x6.0mm,1500, | |
| ... | 4 | EY837 | 6042-000002 EYELET:ID1.5,OD2,L3.1,SN,BSS3-E/EH | S.N.A | ... | 4 | L815 | 2901-000297 FILTER-EMI ON BOARD:-,3A,-,-,3.5x5,TP- | |
| ... | 4 | EY838 | 6042-000002 EYELET:ID1.5,OD2,L3.1,SN,BSS3-E/EH | S.N.A | ... | 4 | L816 | 3301-000287 CORE-FERRITE BEAD:AA,3.5x1.0x6.0mm,1500, | |
| ... | 4 | EY839 | 6042-000002 EYELET:ID1.5,OD2,L3.1,SN,BSS3-E/EH | S.N.A | ... | 4 | L901 | 2701-000114 INDUCTOR-AXIAL:10uH,10%,2.5x3.4mm | |
| ... | 4 | EY840 | 6042-000002 EYELET:ID1.5,OD2,L3.1,SN,BSS3-E/EH | S.N.A | ... | 4 | L902 | 2701-000158 INDUCTOR-AXIAL:22uH,10%,2.5x3.4mm | |
| ... | 4 | EY841 | 6042-000002 EYELET:ID1.5,OD2,L3.1,SN,BSS3-E/EH | S.N.A | ... | 4 | L903 | 2701-000158 INDUCTOR-AXIAL:22uH,10%,2.5x3.4mm | |
| ... | 4 | EY842 | 6042-000002 EYELET:ID1.5,OD2,L3.1,SN,BSS3-E/EH | S.N.A | ... | 4 | L904 | 2701-000158 INDUCTOR-AXIAL:22uH,10%,2.5x3.4mm | |
| ... | 4 | EY843 | 6042-000002 EYELET:ID1.5,OD2,L3.1,SN,BSS3-E/EH | S.N.A | △ | ... | NT801S | 1404-001045 THERMISTOR-NTC:4.7ohm,15%,2900K,35.0mW,T | |
| ... | 4 | EY844 | 6042-000002 EYELET:ID1.5,OD2,L3.1,SN,BSS3-E/EH | S.N.A | ... | 4 | Q201 | 0501-000283 TR-SMALL SIGNAL:KSA539,PNP,400mW,T0-92,T | |
| ... | 4 | EY845 | 6042-000002 EYELET:ID1.5,OD2,L3.1,SN,BSS3-E/EH | S.N.A | ... | 4 | Q402 | 0502-001007 TR-POWER:KSC2073-H2,NPN,25W,T0-220,ST,6 | |
| ... | 4 | EY846 | 6042-000002 EYELET:ID1.5,OD2,L3.1,SN,BSS3-E/EH | S.N.A | ... | 4 | Q601 | 0501-000389 TR-SMALL SIGNAL:KSC815,NPN,400mW,T0-92,T | |
| ... | 4 | EY847 | 6042-000002 EYELET:ID1.5,OD2,L3.1,SN,BSS3-E/EH | S.N.A | ... | 4 | Q603 | 0501-000389 TR-SMALL SIGNAL:KSC815,NPN,400mW,T0-92,T | |
| ... | 4 | EY848 | 6042-000002 EYELET:ID1.5,OD2,L3.1,SN,BSS3-E/EH | S.N.A | ... | 4 | Q604 | 0501-000389 TR-SMALL SIGNAL:KSC815,NPN,400mW,T0-92,T | |
| ... | 4 | EY849 | 6042-000002 EYELET:ID1.5,OD2,L3.1,SN,BSS3-E/EH | S.N.A | ... | 4 | Q605 | 0501-000389 TR-SMALL SIGNAL:KSC815,NPN,400mW,T0-92,T | |
| ... | 4 | EY850 | 6042-000002 EYELET:ID1.5,OD2,L3.1,SN,BSS3-E/EH | S.N.A | ... | 4 | Q802 | 0501-000389 TR-SMALL SIGNAL:KSC815,NPN,400mW,T0-92,T | |
| ... | 4 | EY851 | 6042-000002 EYELET:ID1.5,OD2,L3.1,SN,BSS3-E/EH | S.N.A | ... | 4 | Q804 | 0501-000389 TR-SMALL SIGNAL:KSC815,NPN,400mW,T0-92,T | |
| ... | 4 | EY852 | 6042-000002 EYELET:ID1.5,OD2,L3.1,SN,BSS3-E/EH | S.N.A | ... | 4 | Q901 | 0501-000389 TR-SMALL SIGNAL:KSC815,NPN,400mW,T0-92,T | |
| ... | 4 | EY853 | 6042-000002 EYELET:ID1.5,OD2,L3.1,SN,BSS3-E/EH | S.N.A | ... | 4 | QL01 | 0501-000389 TR-SMALL SIGNAL:KSC815,NPN,400mW,T0-92,T | |
| ... | 4 | EY854 | 6042-000002 EYELET:ID1.5,OD2,L3.1,SN,BSS3-E/EH | S.N.A | ... | 4 | R201 | R-CARBON(S):750HM,5%,1/2W,AA,TP,2.4x6.4MM | |
| ... | 4 | EY855 | 6042-000002 EYELET:ID1.5,OD2,L3.1,SN,BSS3-E/EH | S.N.A | ... | 4 | R202 | R-CARBON:330KOHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ... | 4 | EY856 | 6042-000002 EYELET:ID1.5,OD2,L3.1,SN,BSS3-E/EH | S.N.A | ... | 4 | R203 | R-CARBON:560OHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ... | 4 | EY857 | 6042-000002 EYELET:ID1.5,OD2,L3.1,SN,BSS3-E/EH | S.N.A | ... | 4 | R204 | R-CARBON:27KOHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ... | 4 | EY858 | 6042-000002 EYELET:ID1.5,OD2,L3.1,SN,BSS3-E/EH | S.N.A | ... | 4 | R205 | R-CARBON:180KOHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ... | 4 | F801A | 3602-000114 FUSE-HOLDER:-,30mohm | | ... | 4 | R206 | R-CARBON:68KOHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| △ | ... | F801B | 3602-000114 FUSE-HOLDER:-,30mohm | | ... | 4 | R207 | R-CARBON(S):750HM,5%,1/2W,AA,TP,2.4x6.4MM | |
| △ | ... | FD601S | 3601-000102 FUSE-AXIAL LEAD:125V,1A,FAST-ACTING,GLAS | | ... | 4 | R208 | R-CARBON:3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| △ | ... | FD801S | 3601-001086 FUSE-AXIAL LEAD:125V,5A,FAST-ACTING,GLAS | | ... | 4 | R215 | R-CARBON:100OHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| △ | ... | FD802S | 3601-001228 FUSE-AXIAL LEAD:125V,10A,FAST-ACTING,EPO | | ... | 4 | R216 | R-CARBON:100OHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| △ | ... | FD803S | 3601-001228 FUSE-AXIAL LEAD:125V,10A,FAST-ACTING,EPO | | ... | 4 | R217 | R-CARBON:100OHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ... | 4 | GT101 | AA60-40014A PIN-GT,ASSY:AUTO | S.N.A | ... | 4 | R218 | R-CARBON:22KOHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ... | 4 | GT102 | AA60-40014A PIN-GT,ASSY:AUTO | S.N.A | ... | 4 | R219 | R-METAL:39Kohm,2%,1/8W,AA,TP,1.8x3.5mm | |
| ... | 4 | GT201 | AA60-40014A PIN-GT,ASSY:AUTO | S.N.A | ... | 4 | R220 | R-CARBON:2.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ... | 4 | GT403 | AA60-40014A PIN-GT,ASSY:AUTO | S.N.A | ... | 4 | R222 | R-CARBON:100OHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ... | 4 | GT501 | AA60-40014A PIN-GT,ASSY:AUTO | S.N.A | ... | 4 | R223 | R-CARBON:100OHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ... | 4 | GT502 | AA60-40014A PIN-GT,ASSY:AUTO | S.N.A | ... | 4 | R224 | R-CARBON:10KOHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ... | 4 | GT503 | AA60-40014A PIN-GT,ASSY:AUTO | S.N.A | ... | 4 | R227 | R-CARBON:4.7MOHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ... | 4 | GT801A | AA60-40014A PIN-GT,ASSY:AUTO | S.N.A | ... | 4 | R228 | R-CARBON:4.7MOHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ... | 4 | GT802A | AA60-40014A PIN-GT,ASSY:AUTO | S.N.A | ... | 4 | R229 | R-CARBON:1KOHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ... | 4 | GT803A | AA60-40014A PIN-GT,ASSY:AUTO | S.N.A | ... | 4 | R230 | R-CARBON:10KOHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ... | 4 | GT804 | AA60-40014A PIN-GT,ASSY:AUTO | S.N.A | ... | 4 | R231 | R-CARBON:2.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ... | 4 | GT805 | AA60-40014A PIN-GT,ASSY:AUTO | S.N.A | ... | 4 | R232 | R-CARBON:470OHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| △ | ... | IC803 | 1203-001217 IC-POSILADJUST REG.:431,T0-92,3P,4.58MIL | | ... | 4 | R233 | R-CARBON:100OHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ... | 4 | J402 | 2001-001043 R-CARBON(S):0OHM,5%,1/2W,AA,TP,2.4x6.4MM | | ... | 4 | R234 | R-CARBON:100OHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ... | 4 | J903 | 2001-000281 R-CARBON:100OHM,5%,1/8W,AA,TP,1.8X3.2MM | | ... | 4 | R235 | R-CARBON:100OHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ... | 4 | J904 | 2001-000281 R-CARBON:100OHM,5%,1/8W,AA,TP,1.8X3.2MM | | ... | 4 | R236 | R-CARBON:100OHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ... | 4 | L201 | 2701-000158 INDUCTOR-AXIAL:22uH,10%,2.5x3.4mm | | ... | 4 | R301 | R-CARBON(S):1OHM,5%,1/2W,AA,TP,2.4x6.4MM | |
| ... | 4 | L202 | 2701-000191 INDUCTOR-AXIAL:47uH,10%,2.5x3.4mm | | ... | 4 | R302 | R-METAL:1.6Kohm,2%,1/2W,AA,TP,6.5x2.5mm | |
| ... | 4 | L301 | 2701-000142 INDUCTOR-AXIAL:1uH,10%,2.5x3.4mm | | ... | 4 | R304 | R-FUSIBLE(S):0.18ohm,10%,2W,AF,TP,3.9x10 | |
| ... | 4 | L302 | 2701-000142 INDUCTOR-AXIAL:1uH,10%,2.5x3.4mm | | ... | 4 | R305 | R-FUSIBLE(S):0.18ohm,10%,2W,AF,TP,3.9x10 | |
| ... | 4 | L303 | 3301-000287 CORE-FERRITE BEAD:AA,3.5x1.0x6.0mm,1500, | | ... | 4 | R306 | R-METAL(S):1.5Kohm,1%,1/2W,AA,TP,2.4x6.4 | |
| ... | 4 | L304 | 3301-000287 CORE-FERRITE BEAD:AA,3.5x1.0x6.0mm,1500, | | ... | 4 | R315 | R-METAL OXIDE(S):330ohm,5%,2W,AF,TP,4x12 | |
| △ | ... | L401 | 3301-000287 CORE-FERRITE BEAD:AA,3.5x1.0x6.0mm,1500, | | ... | 4 | R316 | R-METAL OXIDE(S):330ohm,5%,2W,AF,TP,4x12 | |
| ... | 4 | L402 | 2701-000142 INDUCTOR-AXIAL:1uH,10%,2.5x3.4mm | | ... | 4 | R317 | R-FUSIBLE(S):1.8ohm,5%,2W,AF,TP,3.9x10mm | |
| △ | ... | L403 | 3301-000287 CORE-FERRITE BEAD:AA,3.5x1.0x6.0mm,1500, | | ... | 4 | R318 | R-FUSIBLE(S):1.8ohm,5%,2W,AF,TP,3.9x10mm | |
| ... | 4 | L404 | 3301-000287 CORE-FERRITE BEAD:AA,3.5x1.0x6.0mm,1500, | | ... | 4 | R402 | R-METAL OXIDE(S):1Kohm,5%,2W,AF,TP,4x12mm | |
| ... | 4 | L501 | 2901-000297 FILTER-EMI ON BOARD:-,3A,-,-,3.5x5,TP- | | ... | 4 | R403 | R-METAL OXIDE(S):18Kohm,5%,2W,AF,TP,3.9x | |
| ... | 4 | L601 | 2701-000158 INDUCTOR-AXIAL:22uH,10%,2.5x3.4mm | | ... | 4 | R406 | R-CARBON(S):180OHM,5%,1/2W,AA,TP,2.4x6.4 | |
| ... | 4 | L607 | 3301-000287 CORE-FERRITE BEAD:AA,3.5x1.0x6.0mm,1500, | | ... | 4 | R408 | R-CARBON(S):220OHM,5%,1/2W,AA,TP,2.4x6.4MM | |
| ... | 4 | L608 | 3301-000287 CORE-FERRITE BEAD:AA,3.5x1.0x6.0mm,1500, | | ... | 4 | R411 | R-CARBON(S):270OHM,5%,1/2W,AA,TP,2.4x6.4 | |
| ... | 4 | L701 | 2701-000142 INDUCTOR-AXIAL:1uH,10%,2.5x3.4mm | | ... | 4 | R412 | R-METAL(S):1Kohm,2%,1/2W,AA,TP,2.4x6.4mm | |
| ... | 4 | L702 | 2701-000142 INDUCTOR-AXIAL:1uH,10%,2.5x3.4mm | | ... | 4 | R413 | R-METAL OXIDE(S):4.7Kohm,5%,2W,AF,TP,3.9 | |
| ... | 4 | L703 | 2701-000142 INDUCTOR-AXIAL:1uH,10%,2.5x3.4mm | | ... | 4 | R421 | R-FUSIBLE(S):0.47ohm,10%,2W,AF,TP,3.9x10 | |
| ... | 4 | L704 | 2701-000142 INDUCTOR-AXIAL:1uH,10%,2.5x3.4mm | | ... | 4 | R423 | R-METAL(S):79Kohm,1%,1/2W,AA,TP,2.4x6.4mm | |
| ... | 4 | L705 | 2701-000142 INDUCTOR-AXIAL:1uH,10%,2.5x3.4mm | | ... | 4 | R424 | R-METAL(S):6.8Kohm,1%,1/2W,AA,TP,2.4x6.4 | |
| ... | 4 | L706 | 2701-000142 INDUCTOR-AXIAL:1uH,10%,2.5x3.4mm | | ... | 4 | R425 | R-FUSIBLE(S):47ohm,5%,2W,AF,TP,3.9x10mm | |
| ... | 4 | L707 | 2701-000142 INDUCTOR-AXIAL:1uH,10%,2.5x3.4mm | | ... | 4 | R426 | R-FUSIBLE(S):1ohm,5%,1/2W,AF,TP,2.5x6.5mm | |
| ... | 4 | L708 | 2701-000142 INDUCTOR-AXIAL:1uH,10%,2.5x3.4mm | | ... | 4 | R430 | R-CARBON(S):3.9KOHM,5%,1/2W,AA,TP,2.4x6. | |
| ... | 4 | L801 | 3301-001223 CORE-FERRITE BEAD:AA,62ohm,3.5x0.8x5mm,- | | ... | 4 | R502H | R-COMPOSITION:2.7Kohm,10%,1/2W,AA,TP,3.7 | |
| ... | 4 | L802 | 3301-001223 CORE-FERRITE BEAD:AA,62ohm,3.5x0.8x5mm,- | | ... | 4 | R503H | R-COMPOSITION:2.7Kohm,10%,1/2W,AA,TP,3.7 | |
| ... | 4 | L803 | 3301-001223 CORE-FERRITE BEAD:AA,62ohm,3.5x0.8x5mm,- | | ... | 4 | R504 | R-CARBON:100OHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ... | 4 | L804 | 3301-001223 CORE-FERRITE BEAD:AA,62ohm,3.5x0.8x5mm,- | | ... | 4 | R505 | R-CARBON:100OHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ... | 4 | L805 | 3301-000287 CORE-FERRITE BEAD:AA,3.5x1.0x6.0mm,1500, | | ... | 4 | R506 | R-CARBON:100OHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ... | 4 | L806 | 2901-000297 FILTER-EMI ON BOARD:-,3A,-,-,3.5x5,TP- | | ... | 4 | R511H | R-COMPOSITION:2.7Kohm,10%,1/2W,AA,TP,3.7 | |
| ... | 4 | L808 | 3301-000287 CORE-FERRITE BEAD:AA,3.5x1.0x6.0mm,1500, | | ... | 4 | R513 | R-FUSIBLE(S):3.3ohm,5%,1W,AF,TP,3.9x10mm | |

| Level | Loc. No. | Code No. | Description ; Specification | Remark | Level | Loc. No. | Code No. | Description ; Specification | Remark |
|-------|----------|-------------|--|--------|-------|-------------|--|--|--------|
|4 | R514 | 2001-001062 | R-CARBON(S):10MOHM,5%,1/2W,AA,TP2.4X6.4 | |4 | R936 | 2001-000290 | R-CARBON:10KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R601 | 2001-000281 | R-CARBON:100OHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | R937 | 2001-000281 | R-CARBON:100OHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R602 | 2001-000290 | R-CARBON:10KOHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | R938 | 2001-000890 | R-CARBON:6.8KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R603 | 2008-000266 | R-FUSIBLE(S):1ohm,5%,2W,AF,TP3.9x10mm | |4 | R939 | 2001-000890 | R-CARBON:6.8KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R606 | 2001-000786 | R-CARBON:47KOHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | R940 | 2001-000449 | R-CARBON:2.2KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R607 | 2001-000435 | R-CARBON:1MOHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | R941 | 2001-000449 | R-CARBON:2.2KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R608 | 2001-000812 | R-CARBON:5.6KOHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | R942 | 2001-000281 | R-CARBON:100OHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R609 | 2001-000780 | R-CARBON:470OHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | R943 | 2001-000281 | R-CARBON:100OHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R610 | 2001-000435 | R-CARBON:1MOHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | R944 | 2001-000890 | R-CARBON:6.8KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R611 | 2001-000812 | R-CARBON:5.6KOHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | R945 | 2001-000890 | R-CARBON:6.8KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R612 | 2001-000780 | R-CARBON:470OHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | R946 | 2001-000890 | R-CARBON:6.8KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R613 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | R947 | 2001-000734 | R-CARBON:4.7KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R614 | 2001-000924 | R-CARBON:680OHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | R948 | 2001-000281 | R-CARBON:100OHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R615 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | R949 | 2001-000290 | R-CARBON:10KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R616 | 2001-000938 | R-CARBON:680HM,5%,1/8W,AA,TP1.8X3.2MM | |4 | R950 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R801 | 2003-001093 | R-METAL OXIDE(S):12Kohm,5%,2W,AF,TP3.9x | |4 | R951 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R802 | 2003-001093 | R-METAL OXIDE(S):12Kohm,5%,2W,AF,TP3.9x | |4 | R952 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R803 | 2003-001093 | R-METAL OXIDE(S):12Kohm,5%,2W,AF,TP3.9x | |4 | RL01 | 2001-001178 | R-CARBON(S):680OHM,5%,1/2W,AA,TP2.4X6.4 | |
|4 | R804 | 2003-002239 | R-METAL OXIDE(S):100KOHM,5%,2W,AF,TP3.9 | | △ | RX801S | 2002-001011 | R-COMPOSITION:3.3Mohm,5%,1/2W,AA,TP3.7x | |
|4 | R805 | 2003-002239 | R-METAL OXIDE(S):100KOHM,5%,2W,AF,TP3.9 | | △ | RY801S | 2002-001012 | R-COMPOSITION:8.2Mohm,5%,1/2W,AA,TP3.7x | |
|4 | R806 | 2001-000734 | R-CARBON:4.7KOHM,5%,1/8W,AA,TP1.8X3.2MM | | △ | VX801S | 1405-000187 | VARISTOR:750V,1250A,12.5x7mm,TP | |
|4 | R808 | 2009-000018 | R-METAL PLATE:0.22ohm,10%,5W,CL,TP5x14x | |4 | X901 | 2801-003433 | CRYSTAL-UNIT:12MHZ,30PPM,28-AAM,30PF,300 | |
|4 | R809 | 2009-000018 | R-METAL PLATE:0.22ohm,10%,5W,CL,TP5x14x | |4 | AA41-00828A | PCB-MAIN; CEM-1,1LA,1.6T,330X245,1A | S.N.A | |
|4 | R810 | 2001-001088 | R-CARBON(S):1KOHM,5%,1/2W,AA,TP2.4X6.4M | |3 | AA65-30104C | CLAMPER CORE-WIRE:ALL MODEL,NYLON 66,V2, | S.N.A | |
|4 | R811 | 2001-001144 | R-CARBON(S):4.7KOHM,5%,1/2W,AA,TP2.4X6.4 | |3 | 3301-001201 | CORE-FERRITE-AE,21x11x32mm,1500,280G | | |
|4 | R813 | 2001-000052 | R-CARBON(S):3.3KOHM,5%,1/2W,AA,TP2.4X6.4 | |3 | AA65-30009A | CLAMPER CORE-FBT;-ABS,VO,-BLK,- | S.N.A | |
|4 | R814 | 2001-001410 | R-CARBON(S):43OHM,5%,1/2W,AA,TP2.4X6.4M | |2 | AA61-01269A | BRACKET-CHASSIS:210TP,SECC,T1.0 | | |
|4 | R815 | 2003-001040 | R-METAL OXIDE(S):47Kohm,5%,2W,AF,TP3.9x | | | | | | |
|4 | R816 | 2001-001088 | R-CARBON(S):1KOHM,5%,1/2W,AA,TP2.4X6.4M | | | | | | |
|4 | R817 | 2001-001088 | R-CARBON(S):1KOHM,5%,1/2W,AA,TP2.4X6.4M | | | | | | |
|4 | R818 | 2004-004089 | R-METAL(S):123Kohm,1%,1/2W,AA,TP2.5x6.5 | | | | | | |
|4 | R819 | 2001-001131 | R-CARBON(S):33KOHM,5%,1/2W,AA,TP2.4X6.4 | | | | | | |
|4 | R820 | 2004-001983 | R-METAL(S):2.49Kohm,1%,1/2W,AA,TP2.4X6.4 | | 1 | * | AA91-06042A | ASSY CPT;SMO-210TPV | S.N.A |
|4 | R823 | 2001-001077 | R-CARBON(S):150OHM,5%,1/2W,AA,TP2.4X6.4 | |2 | | AA63-60028A | SPACER-DY;-NEOPRENE,-,-,-,BLK,-,-,V0 W1 | S.N.A |
|4 | R826 | 2003-002037 | R-METAL OXIDE(S):270ohm,5%,2W,AF,TP3.9x | |2 | | AA27-00199A | DEFLECTION YOKE:21DF,CDY-MT2103S,ST-3,A5 | |
|4 | R827 | 2008-000205 | R-FUSIBLE(S):10ohm,5%,1/2W,AF,TP2.5x6.5 | |2 | | AA27-00002A | MAGNET CONVERGENCE;-JH291-SC-OB,29.1MM | |
|4 | R828 | 2008-000206 | R-FUSIBLE(S):1ohm,5%,1/2W,AF,TP2.5x6.5m | | △ |2 | AA03-00317A | CRT COLOR:A51QDX992X,0MG,1.85MH,18.0MH,2 | |
|4 | R830 | 2003-001040 | R-METAL OXIDE(S):47Kohm,5%,2W,AF,TP3.9x | | | | | | |
|4 | R833 | 2001-000734 | R-CARBON:4.7KOHM,5%,1/8W,AA,TP1.8X3.2MM | | | | | | |
|4 | R834 | 2003-001040 | R-METAL OXIDE(S):47Kohm,5%,2W,AF,TP3.9x | | | | | | |
|4 | R835 | 2003-001040 | R-METAL OXIDE(S):47Kohm,5%,2W,AF,TP3.9x | | | | | | |
|4 | R837 | 2001-001071 | R-CARBON(S):12KOHM,5%,1/2W,AA,TP2.4X6.4 | | | | | | |
|4 | R901 | 2001-000290 | R-CARBON:10KOHM,5%,1/8W,AA,TP1.8X3.2MM | | 1 | * | AA90-04488A | ASSY COVER REAR;SMO-210TPV | S.N.A |
|4 | R902 | 2001-000563 | R-CARBON:27KOHM,5%,1/8W,AA,TP1.8X3.2MM | |2 | | AA63-00649A | COVER-SCREW:210TPABS HB,IV16 | |
|4 | R903 | 2001-000290 | R-CARBON:10KOHM,5%,1/8W,AA,TP1.8X3.2MM | |2 | | AA64-03280A | CABINET-BACK:210TPABS HB,IV16 | |
|4 | R904 | 2001-000786 | R-CARBON:47KOHM,5%,1/8W,AA,TP1.8X3.2MM | |2 | | AA96-01310A | ASSY MISC P-SHIELD TOP:210TPAL 1050S,T0, | |
|4 | R905 | 2001-000290 | R-CARBON:10KOHM,5%,1/8W,AA,TP1.8X3.2MM | |3 | | BH72-00052A | SHEET ABS-ANODE-PG17HS,PPVO,WHITE,T1.0, | S.N.A |
|4 | R906 | 2001-000290 | R-CARBON:10KOHM,5%,1/8W,AA,TP1.8X3.2MM | |3 | | BH70-00028A | SHIELD TOP:PG21LS,AL 1050S,T0.3 | S.N.A |
|4 | R907 | 2001-000290 | R-CARBON:10KOHM,5%,1/8W,AA,TP1.8X3.2MM | |3 | | BH70-00027B | SHIELD-RIGHT:210TPAL 1050S,T0.3,TT,MONIT | |
|4 | R908 | 2001-000290 | R-CARBON:10KOHM,5%,1/8W,AA,TP1.8X3.2MM | |3 | | BH70-00026B | SHIELD-LEFT:210TPAL 1050S,T0.3,TT,MONITO | |
|4 | R909 | 2001-000290 | R-CARBON:10KOHM,5%,1/8W,AA,TP1.8X3.2MM | |3 | | AA63-00641A | SHIELD-CRT,REAR:210TPAL 1050S,T0.3 | S.N.A |
|4 | R910 | 2001-000281 | R-CARBON:100OHM,5%,1/8W,AA,TP1.8X3.2MM | | | | | | |
|4 | R911 | 2001-000281 | R-CARBON:100OHM,5%,1/8W,AA,TP1.8X3.2MM | | | | | | |
|4 | R912 | 2001-000281 | R-CARBON:100OHM,5%,1/8W,AA,TP1.8X3.2MM | | | | | | |
|4 | R913 | 2001-000281 | R-CARBON:100OHM,5%,1/8W,AA,TP1.8X3.2MM | | | | | | |
|4 | R914 | 2001-000281 | R-CARBON:100OHM,5%,1/8W,AA,TP1.8X3.2MM | | | | | | |
|4 | R915 | 2001-000290 | R-CARBON:10KOHM,5%,1/8W,AA,TP1.8X3.2MM | | | | | | |
|4 | R916 | 2001-000290 | R-CARBON:10KOHM,5%,1/8W,AA,TP1.8X3.2MM | | | | | | |
|4 | R917 | 2001-000281 | R-CARBON:100OHM,5%,1/8W,AA,TP1.8X3.2MM | | | | | | |
|4 | R918 | 2001-000290 | R-CARBON:10KOHM,5%,1/8W,AA,TP1.8X3.2MM | |2 | B/CHA+ | 6003-000009 | SCREW-TAPTITE-BH;+,B,M4,L16,ZPC(YEL),SWR | S.N.A |
|4 | R919 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | |2 | B/CHA+ | 6003-000009 | SCREW-TAPTITE-BH;+,B,M4,L16,ZPC(YEL),SWR | S.N.A |
|4 | R920 | 2001-000290 | R-CARBON:10KOHM,5%,1/8W,AA,TP1.8X3.2MM | |2 | B/CRT+ | AA60-10050R | SCREW-ASSY;-SWRCH18A,M5,L31.5,HH;+,WC,- | S.N.A |
|4 | R921 | 2001-000281 | R-CARBON:100OHM,5%,1/8W,AA,TP1.8X3.2MM | |2 | B/CRT+ | 6003-001019 | SCREW-TAPTITE-RH;+,B,M4,L12,ZPC(BLK),SWR | S.N.A |
|4 | R922 | 2001-000281 | R-CARBON:100OHM,5%,1/8W,AA,TP1.8X3.2MM | |2 | C/B+B/ | 6003-000009 | SCREW-TAPTITE-BH;+,B,M4,L16,ZPC(YEL),SWR | S.N.A |
|4 | R923 | 2001-000281 | R-CARBON:100OHM,5%,1/8W,AA,TP1.8X3.2MM | |2 | C/B+B/ | 6003-000009 | SCREW-TAPTITE-BH;+,B,M4,L16,ZPC(YEL),SWR | S.N.A |
|4 | R924 | 2001-000281 | R-CARBON:100OHM,5%,1/8W,AA,TP1.8X3.2MM | |2 | C/B+C/ | 6003-000009 | SCREW-TAPTITE-BH;+,B,M4,L16,ZPC(YEL),SWR | S.N.A |
|4 | R925 | 2001-000281 | R-CARBON:100OHM,5%,1/8W,AA,TP1.8X3.2MM | |2 | P/CTRL | AA64-03287A | KNOB-ROTARY:210TPABS,HB,IV16 | |
|4 | R926 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | |2 | P/CTRL | 6003-001019 | SCREW-TAPTITE-RH;+,B,M4,L12,ZPC(BLK),SWR | S.N.A |
|4 | R927 | 2001-000281 | R-CARBON:100OHM,5%,1/8W,AA,TP1.8X3.2MM | |2 | P/F+C/ | 6003-001019 | SCREW-TAPTITE-RH;+,B,M4,L12,ZPC(BLK),SWR | S.N.A |
|4 | R928 | 2001-000290 | R-CARBON:10KOHM,5%,1/8W,AA,TP1.8X3.2MM | |2 | S/CRT+ | 6002-000175 | SCREW-TAPPING-PWH;+,2,M3,L8,ZPC(YEL),SM2 | |
|4 | R929 | 2001-000281 | R-CARBON:100OHM,5%,1/8W,AA,TP1.8X3.2MM | |2 | S/CRT+ | 6002-000175 | SCREW-TAPPING-PWH;+,2,M3,L8,ZPC(YEL),SM2 | |
|4 | R930 | 2001-000281 | R-CARBON:100OHM,5%,1/8W,AA,TP1.8X3.2MM | |2 | S/CRT+ | 6002-000175 | SCREW-TAPPING-PWH;+,2,M3,L8,ZPC(YEL),SM2 | |
|4 | R931 | 2001-000290 | R-CARBON:10KOHM,5%,1/8W,AA,TP1.8X3.2MM | |2 | | AA96-01312A | ASSY COVER P-PANEL FRONT;SMO-210TPV | |
|4 | R932 | 2001-000281 | R-CARBON:100OHM,5%,1/8W,AA,TP1.8X3.2MM | |3 | K/C+P/ | 6003-001019 | SCREW-TAPTITE-RH;+,B,M4,L12,ZPC(BLK),SWR | S.N.A |
|4 | R933 | 2001-000281 | R-CARBON:100OHM,5%,1/8W,AA,TP1.8X3.2MM | |3 | KNOPOW | AA61-60003J | SPRING ETC-CS;-SUS304,-,-,OD6,N7,OD6,-, | S.N.A |
|4 | R934 | 2001-000281 | R-CARBON:100OHM,5%,1/8W,AA,TP1.8X3.2MM | |3 | W/RL+P | 6003-001019 | SCREW-TAPTITE-RH;+,B,M4,L12,ZPC(BLK),SWR | S.N.A |
|4 | R935 | 2001-000281 | R-CARBON:100OHM,5%,1/8W,AA,TP1.8X3.2MM | | | | | | |

Electrical Parts List


| Level | Loc. No. | Code No. | Description ; Specification | Remark | Level | Loc. No. | Code No. | Description ; Specification | Remark |
|-------|----------|--------------------|---|--------|-------|----------|----------|-----------------------------|--------|
| ... | 3 | AA64-03289A | WINDOW-RMC,LED;210TP,PC CLR | | | | | | |
| ... | 3 | AA64-03288A | DECORATION-ROTARY;210TP,ABS,HB,IV16,SVM3 | | | | | | |
| ... | 3 | AA64-03286A | KNOB-POWER;210TP,ABS,HB,IV16 | | | | | | |
| ... | 3 | AA64-03285A | KNOB-CONTROL;210TP,ABS,HB,IV16 | | | | | | |
| ... | 3 | AA64-03283A | PANEL-CONTROL;210TP,ABS,HB,IV16 | | | | | | |
| ... | 2 | AA96-01311A | ASSY MISC P-BRACKET CRT;210TP,SECC,T1.0 | | | | | | |
| ... | 3 | BH71-10422A | EARTH PLATE;CSH780B ,PBS 3/4H,T0.2 | S.N.A | | | | | |
| ... | 3 | BH72-60778A | COVER DCOIL;CHB7707,PP,C/R | S.N.A | | | | | |
| ... | 3 | AA27-00295A | COIL DEGAUSSING;- ,SMO-210TP;3.30MH,10%,4 | | | | | | |
| ... | 3 | AA98-00125B | ASSY TBC WIRE(P);-,21INCH,PAL,2P-WH,EURO | S.N.A | | | | | |
| ... | 3 | AA63-10002B | BAND-TIE;NYLON66 V2,L140,NTR | S.N.A | | | | | |
| ... | 3 | BH61-00035B | BRACKET-CRT TOP;210TP,SECC,T1.0 | | | | | | |
| ... | 3 | BH61-00036B | BRACKET-CRT BOTTOM;210TP,SECC,T1.0 | | | | | | |
| ... | 3 | BH61-00037B | BRACKET-CRT R/L;210TP,SECC,T1.0 | | | | | | |
| ... | 3 | BH71-00048A | EARTH PLATE;PG21LS,PBS,T0.2 | S.N.A | | | | | |
| ... | 3 | BH71-10402A | EARTH PLATE;CSH780B ,PBS-1,T0.3,S17I | S.N.A | | | | | |
| ... | 2 | AA96-01307A | ASSY COVER P-FRONT;SMO-210TPV | | | | | | |
| ... | 3 | SPK+C/ 6003-001023 | SCREW-TAPTITE;RWH,+ ,B,M3,L10,ZPC(YEL),SW | S.N.A | | | | | |
| ... | 3 | 3001-001186 | SPEAKER;3W,8OHM,80°±2DB,270HZ | | | | | | |
| ... | 3 | AA64-03279A | CABINET-FRONT;210TP,ABS HB,IV16 | | | | | | |
| ... | 3 | AA65-00011C | CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2, | S.N.A | | | | | |

ASSY ACCESSORY

| | | | | |
|-----|---|-------------|--|-------|
| 1 | * | AA92-07491A | ASSY ACCESSORY;SMO-210TPV | |
| ... | 2 | AA39-00344A | CABLE FORM CONN.COAX;SMO-210TPUL2990#26 | |
| ... | 2 | AA39-00343A | CABLE FORM CONN.COAX;KS6A/SMO-210TPUL29 | |
| ... | 2 | BH39-10007A | CBF POWER CORD;DET,250V/6A,H05VV-F,LP-34 | |
| ... | 2 | AA69-00862A | BAG PE;- ,HDPE PE FOAM,T0.03,W400,H240,- , | S.N.A |
| ... | 2 | AA68-02690A | MANUAL USERS;SMO-210TPEN,FR,SPIT,GE,W/ | |
| ... | 2 | AA59-00299A | REMOCON;- ,TM66,DIY,35,G6671B,S/S,L/GRAY | |


7. Block Diagrams

7-1 Power Diagram

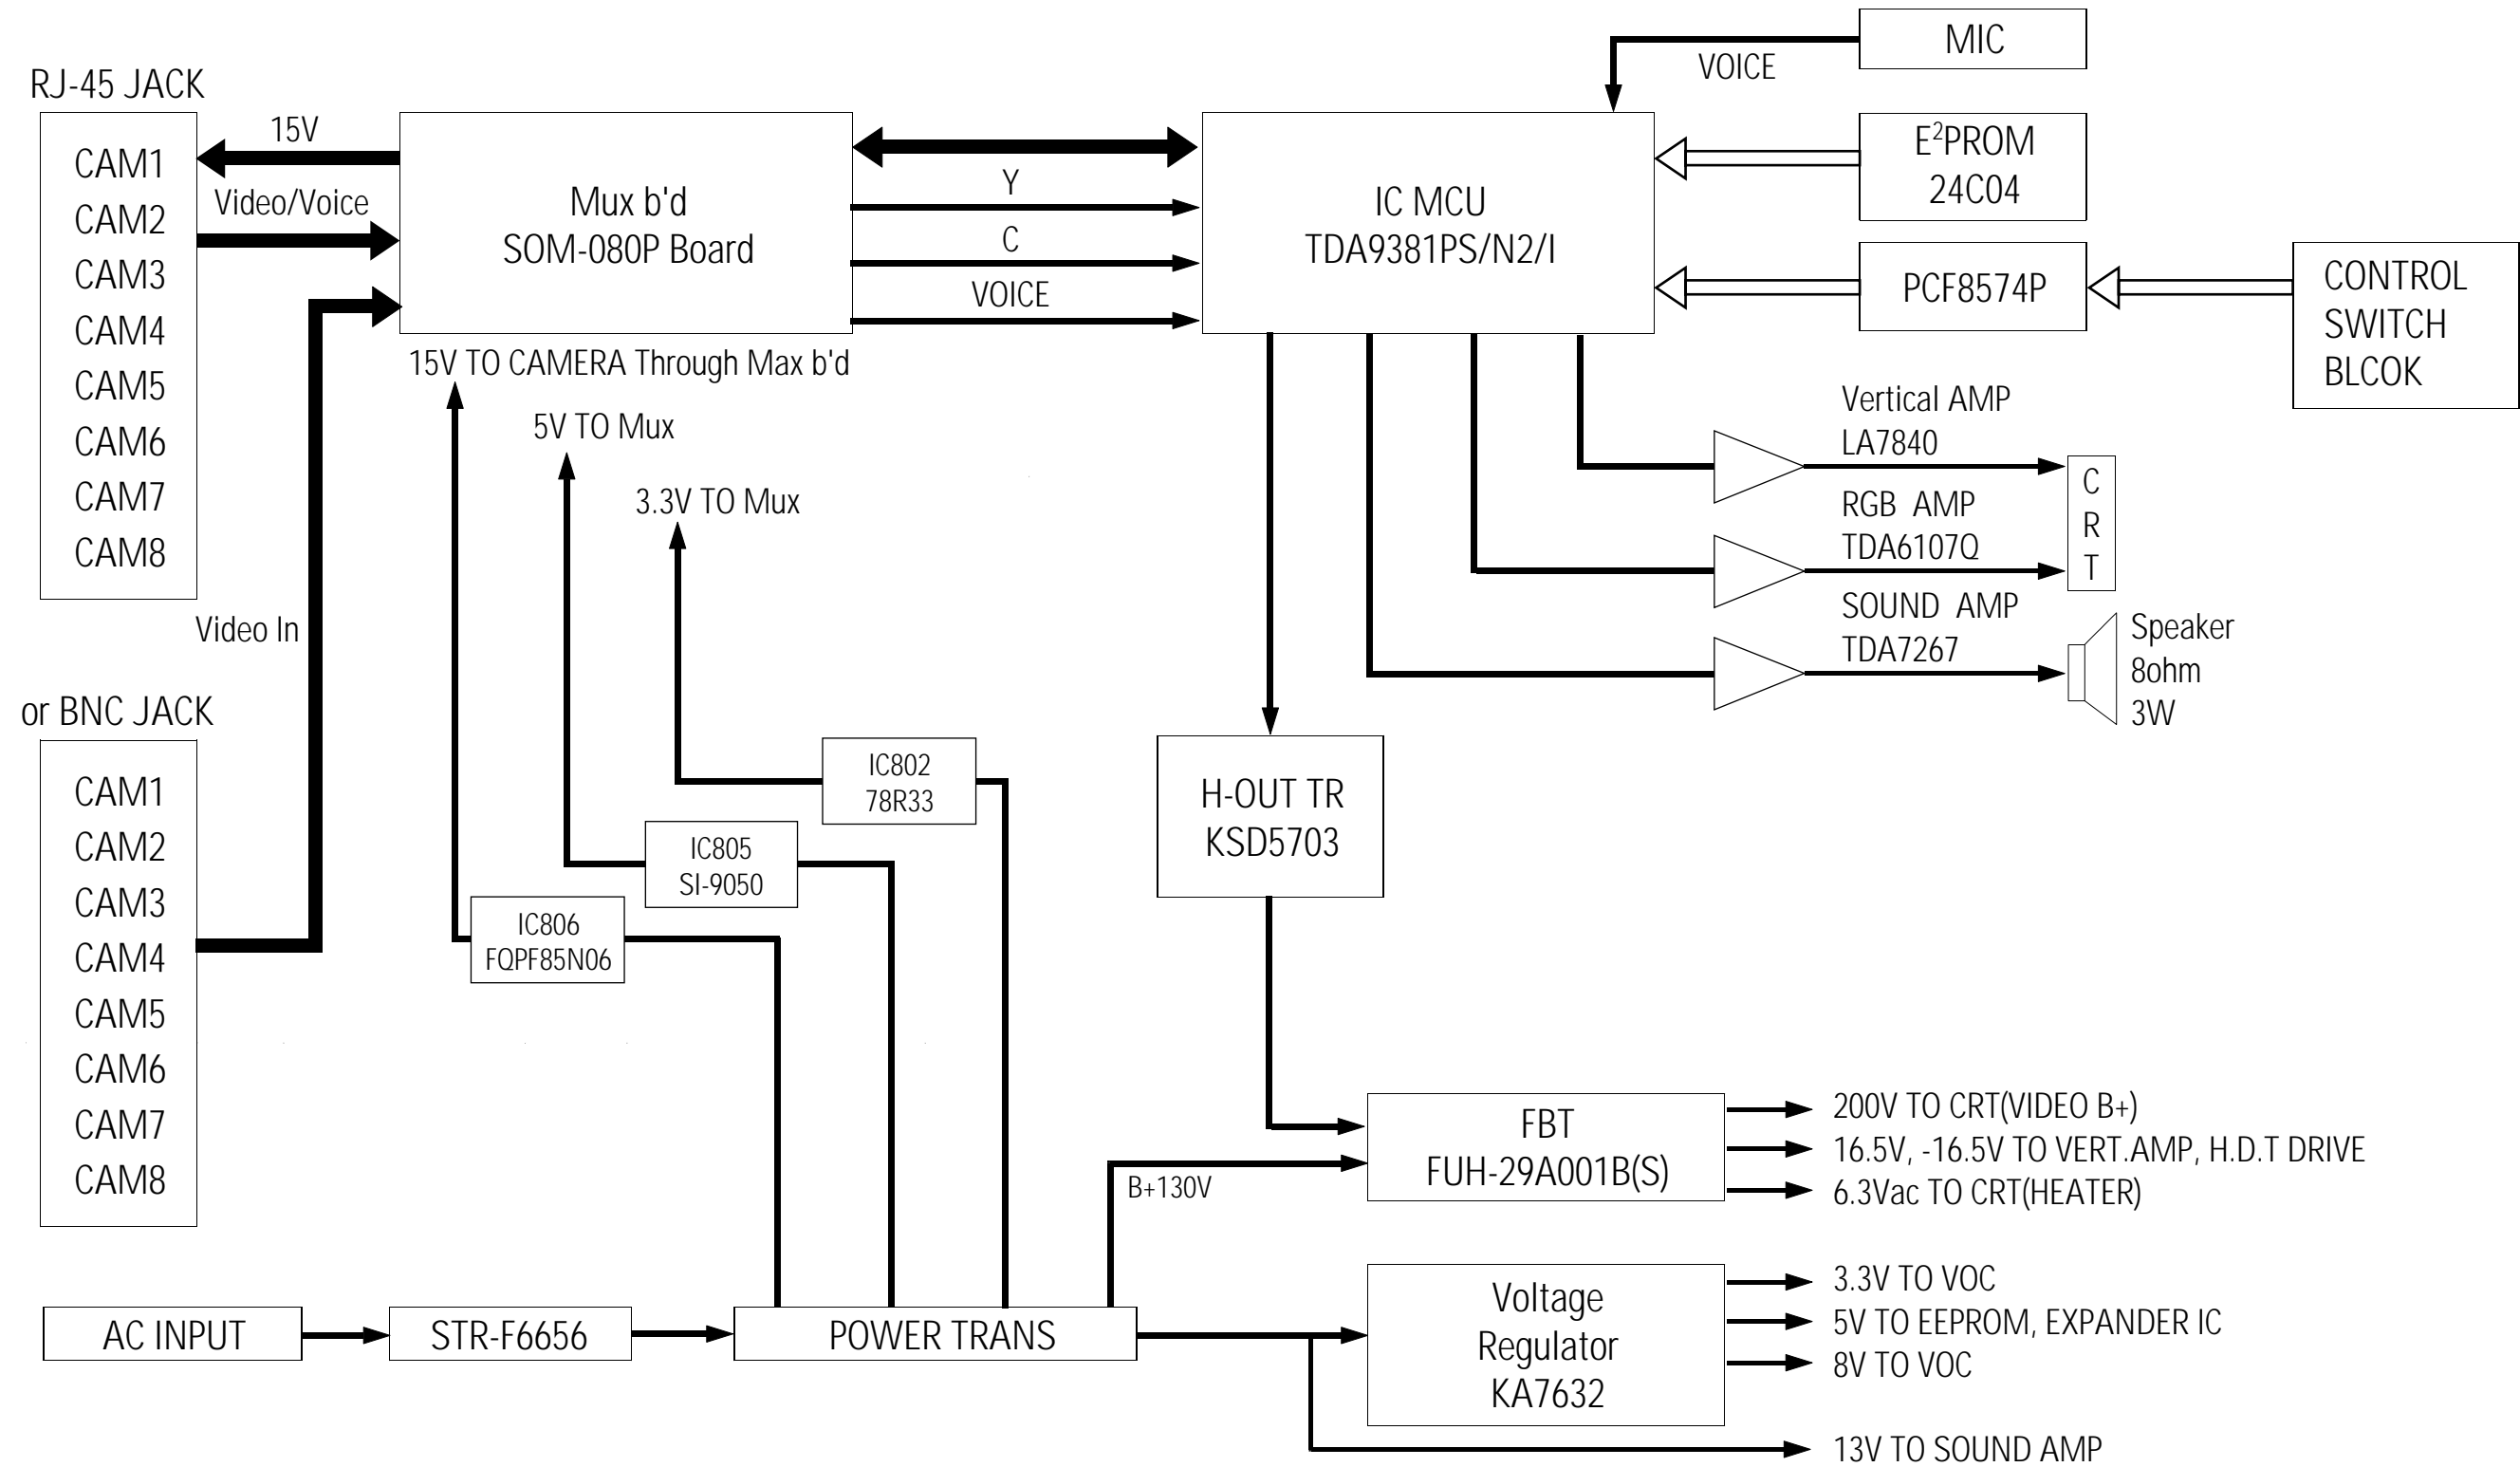


8. PCB Diagrams


8-1 PATTERN

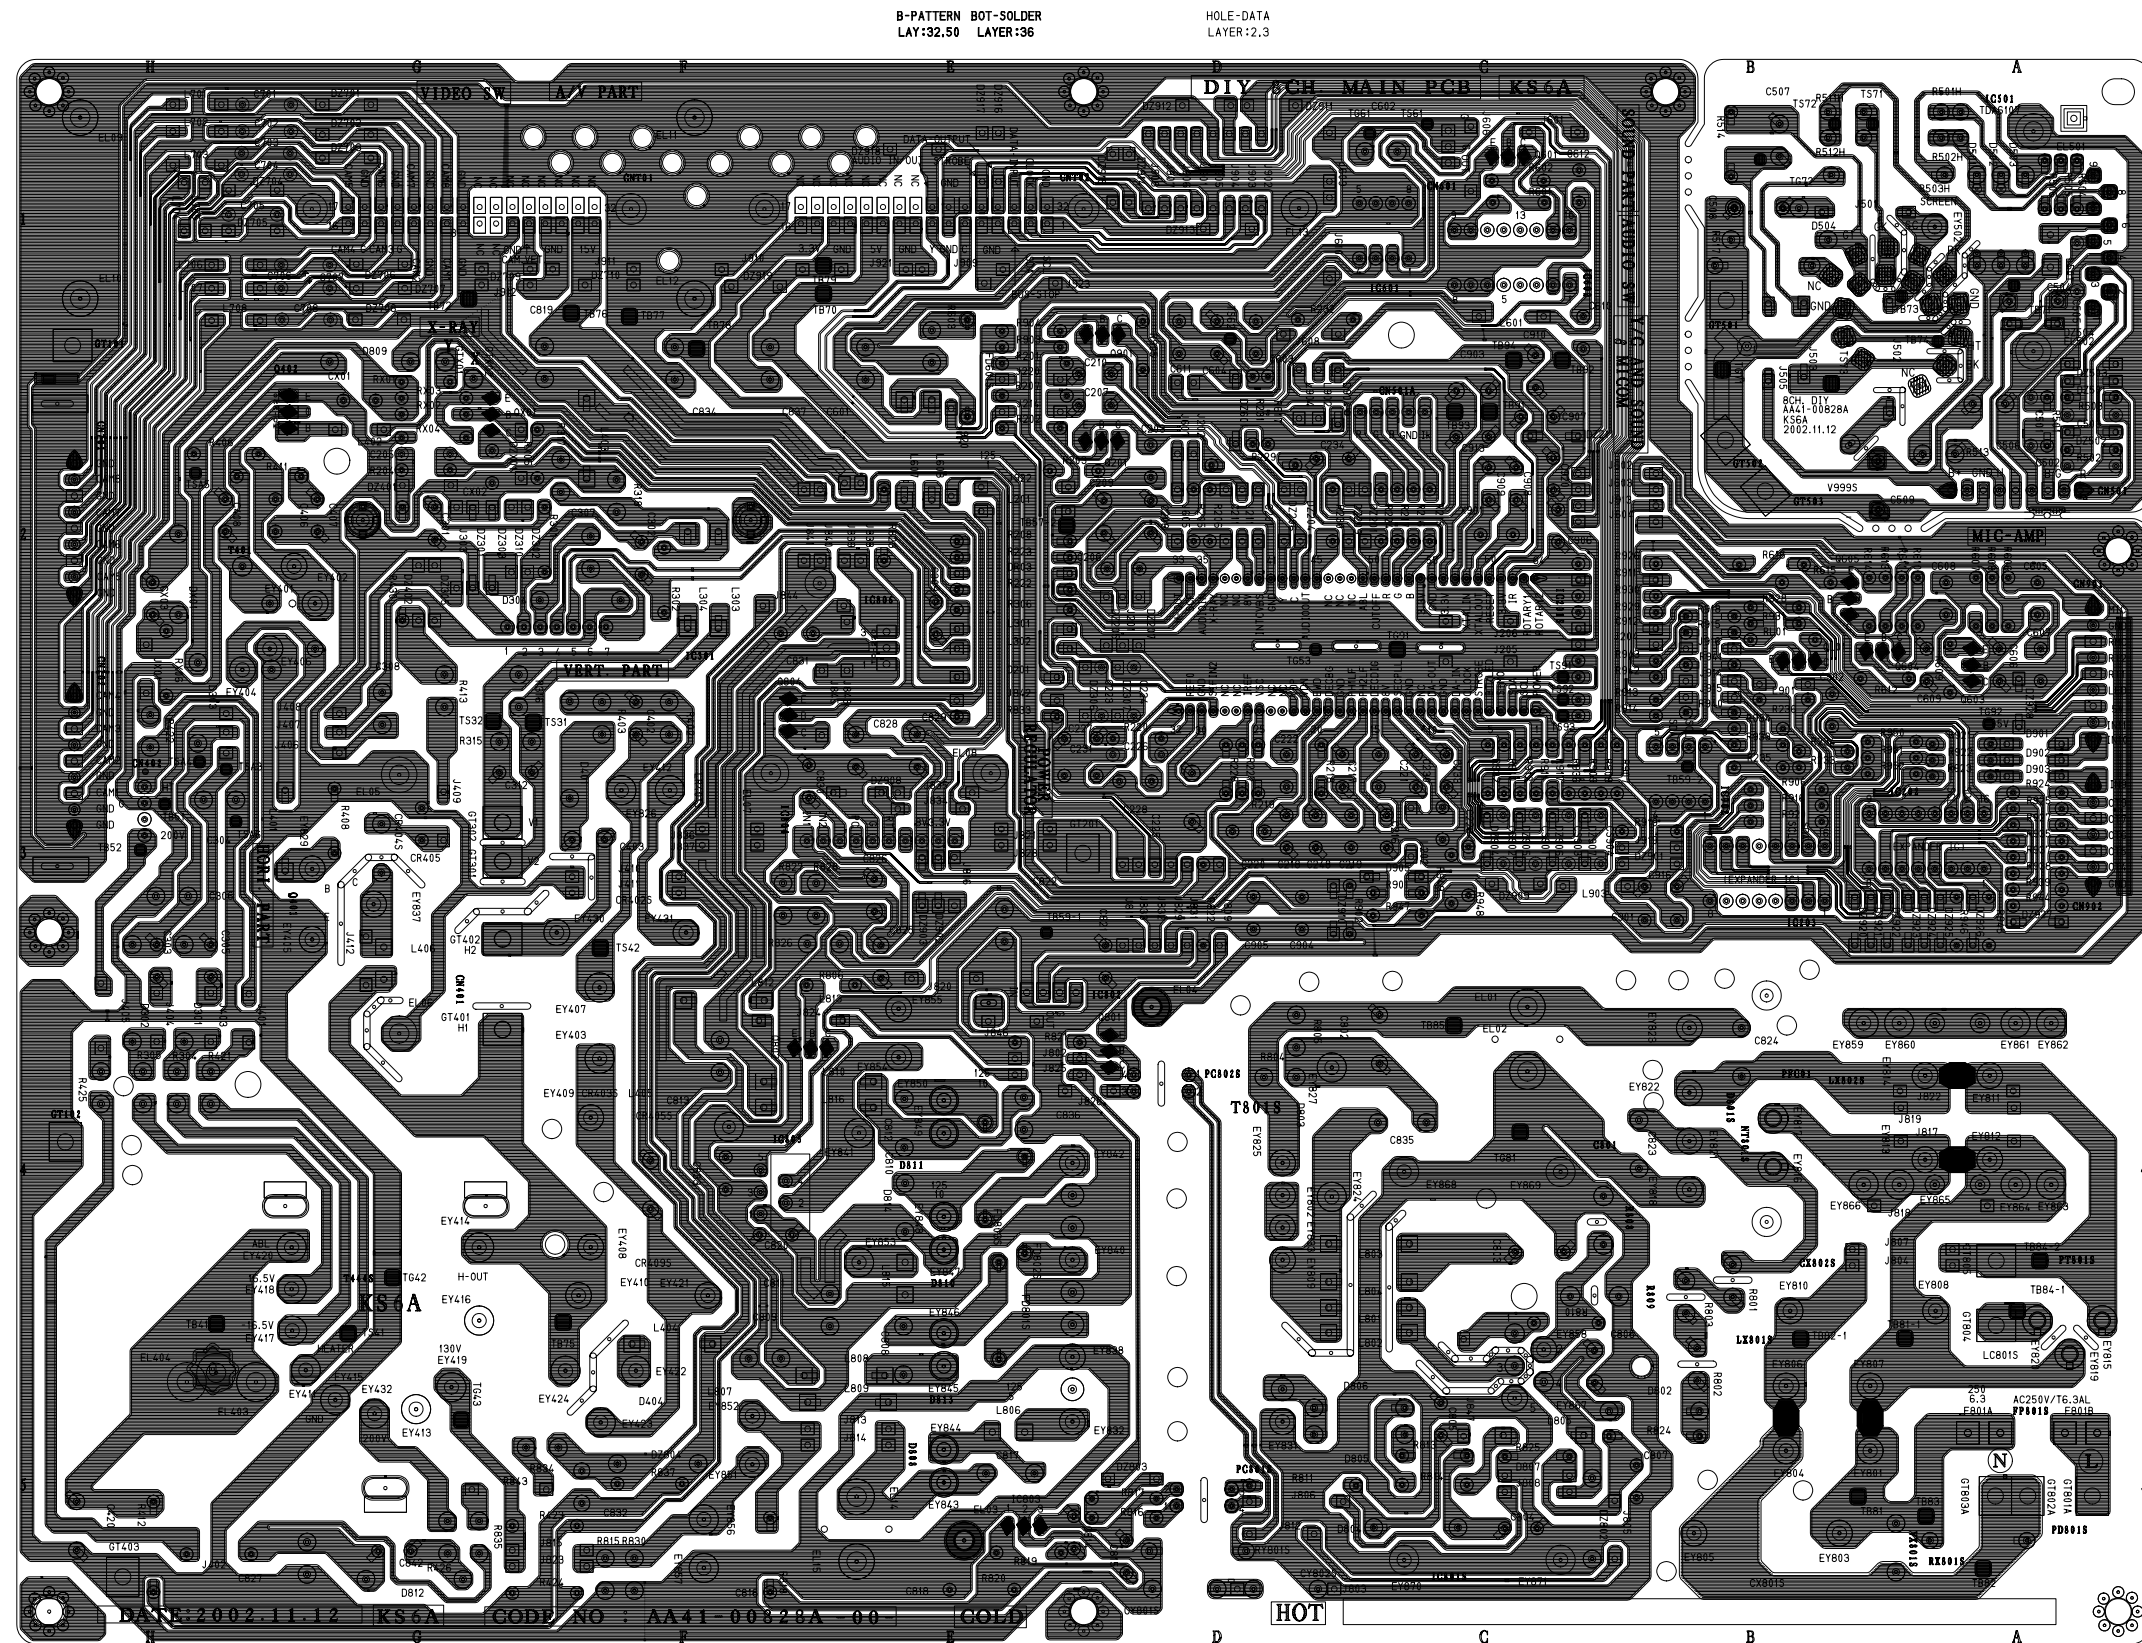

8-2 TOP

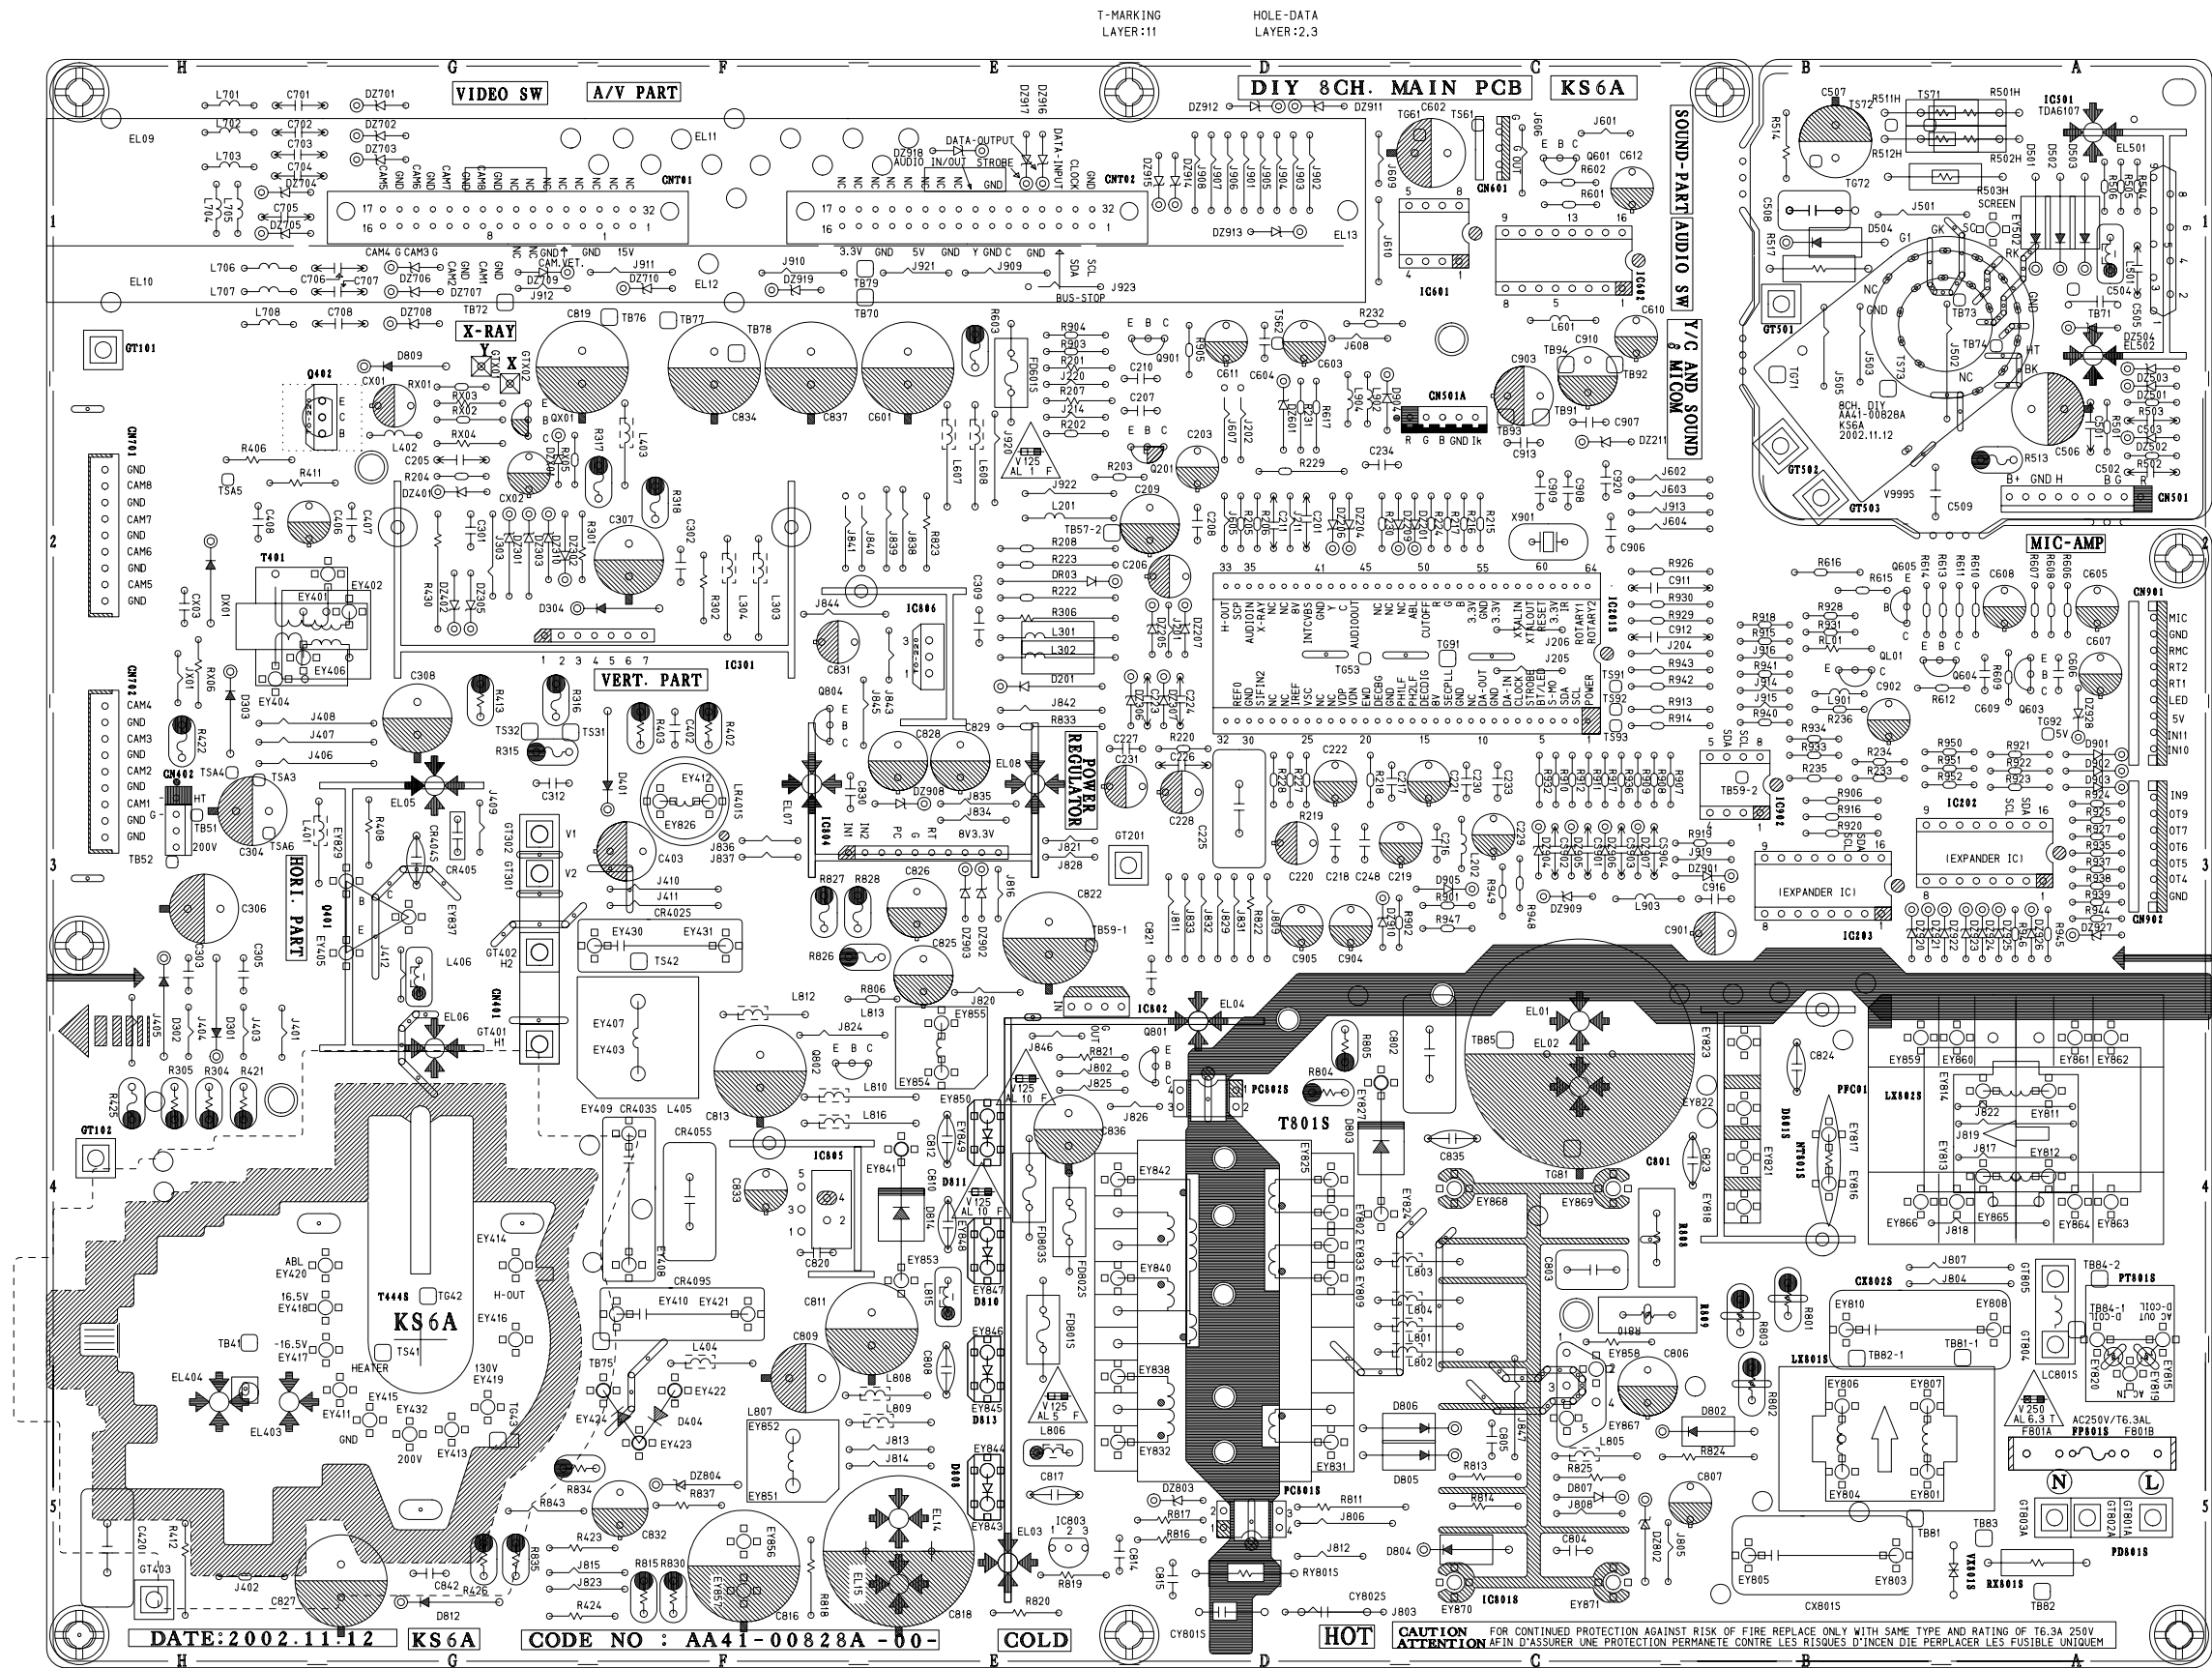

9. Wiring Diagram

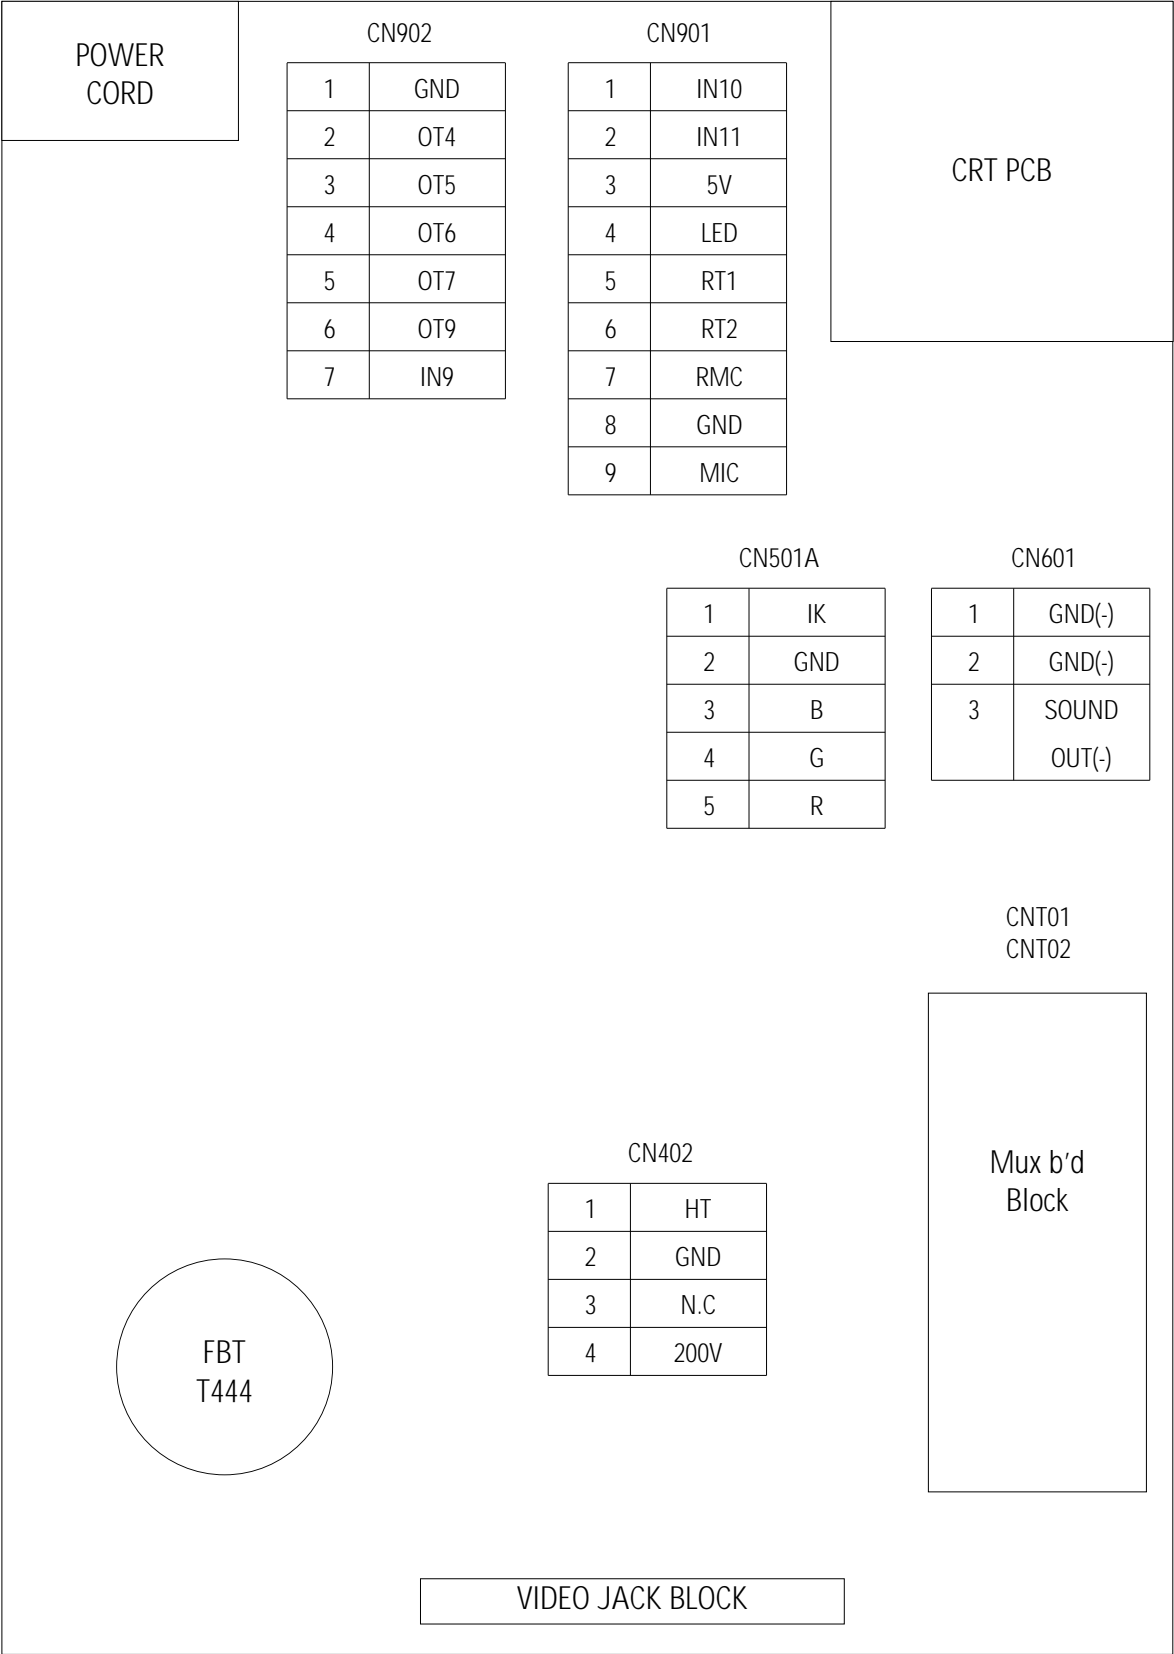


MEMO

10-1 MAIN 1



10-2 MAIN 2

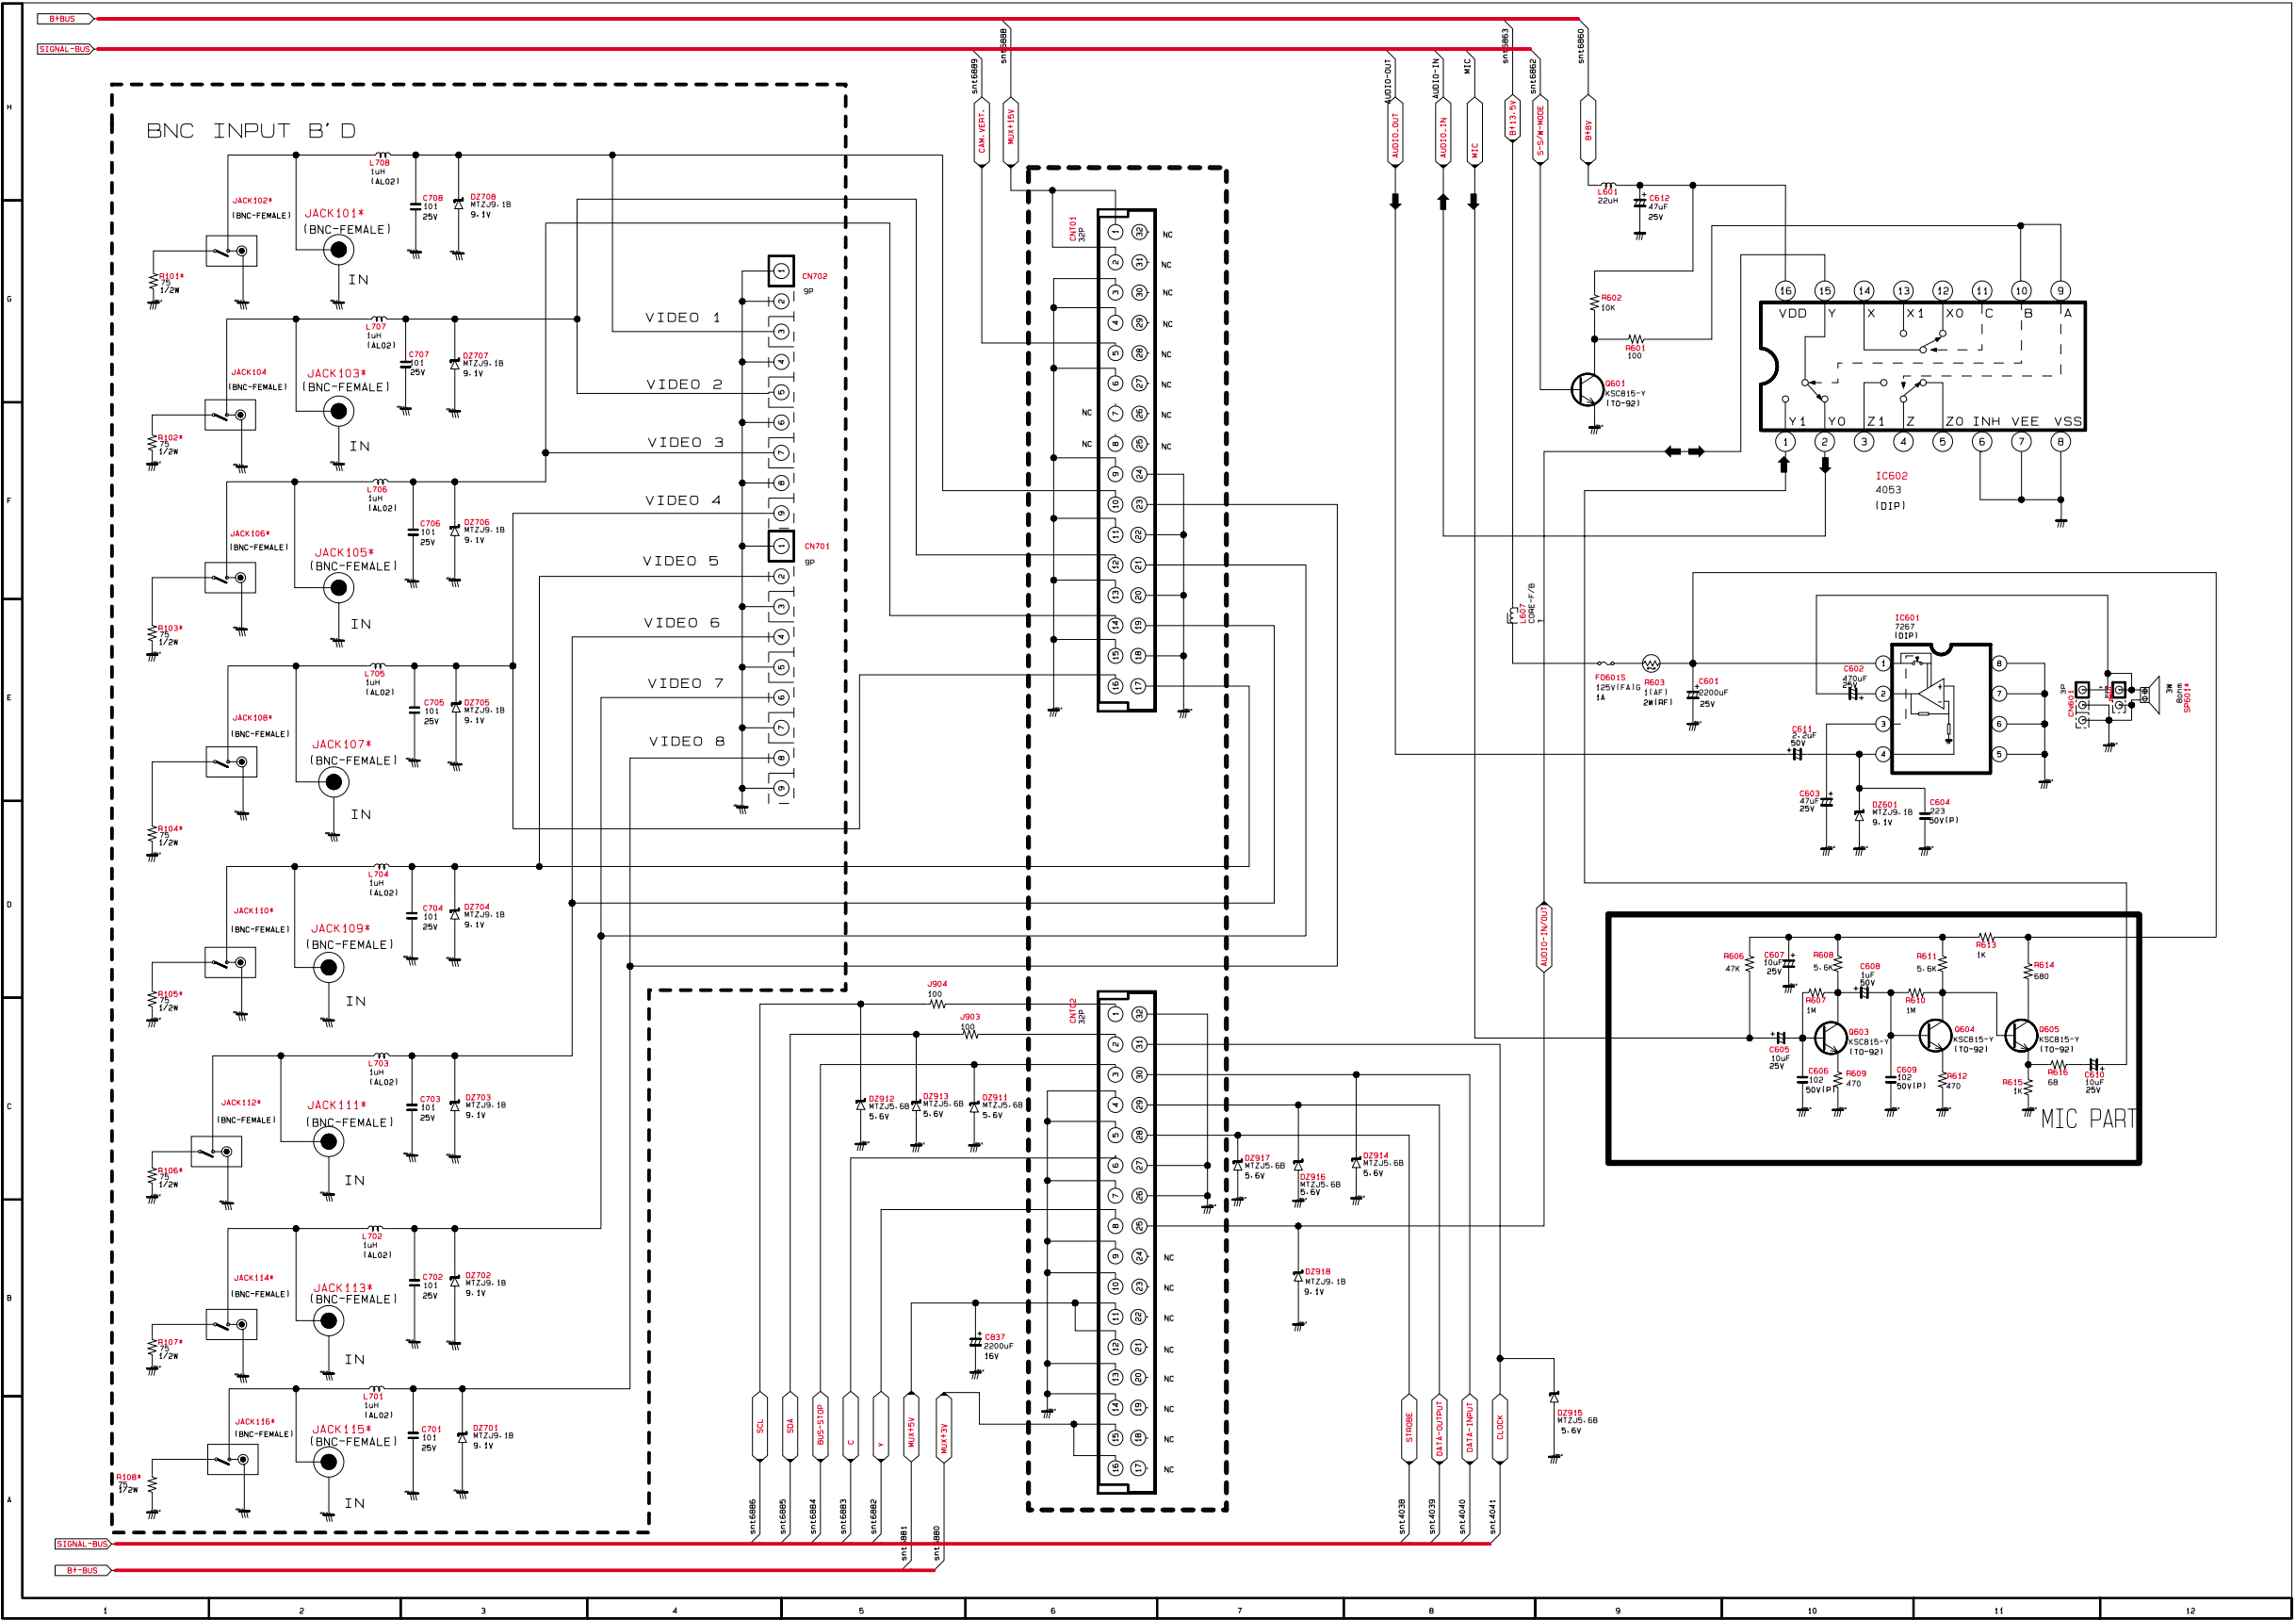

10-3 MAIN3

